

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

**ASSEMBLY -
PUSHBUTTON SWITCH**

CATALOG LISTING
1PB549-H58

CATALOG LISTING
1PB549-H58
PAGE 1 OF 1
ISSUE
12

REPLACES

PR-5810-T

CHECK

REVISIONS

A	C092114
JAK	
24 FEB 98	
B	203865
CSL	
5 SEP 01	
C	207683
GLH	
19 MAR 03	
D	0018502
PM	
27 FEB 06	



CHECK

CHECK

JAK 24 FEB 98

RASTER

DRAWN

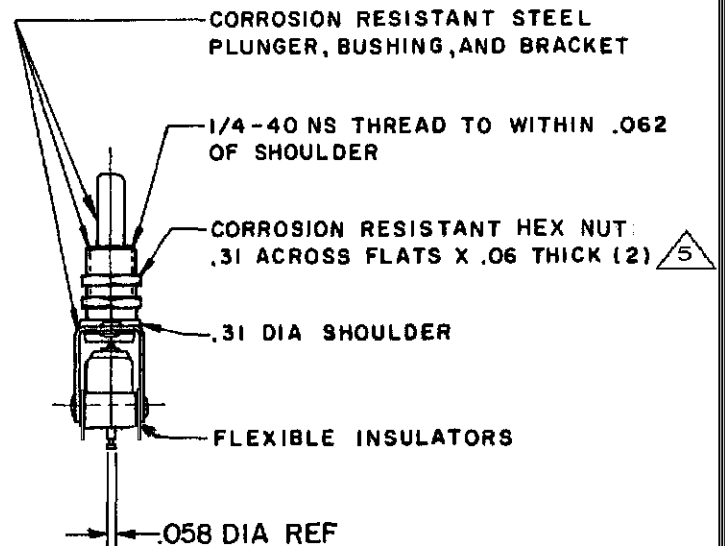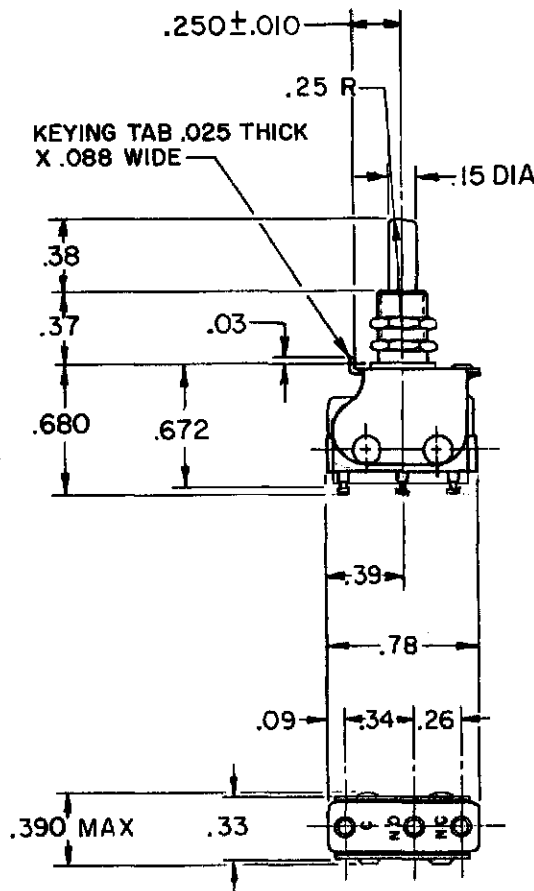


NOTES

- 1 - UNIT INCLUDES CAT. LIST. 11SM23-H58 BASIC SWITCH
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - RECOMMENDED FOR MANUAL OPERATION ONLY
- 4 - FURNISH (1) RED AND (1) WHITE BUTTON UNASSEMBLED
- $\triangle 5$ MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE-----17.6 OZ MAX		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
		30 VOLTS DC RATING		ONE PLACE (.0)	±.030
				TWO PLACE (.00)	±.015
				THREE PLACE (.000)	±.005
				ANGLES	±
OVERTRAVEL-----.101 APPROX		INDUCTIVE-----SEA LEVEL ---.5 AMP 50,000 FT ---.5 AMP			
TOTAL TRAVEL-----.180 MAX		RESISTIVE-----SEA LEVEL ---1 AMP 50,000 FT ---1 AMP			
		MAXIMUM INRUSH-----2 AMP		WEIGHT	