

HONEYWELL
PART NUMBER


1SM23-T2

PRODUCT CODE

TWA2380

JG-80328

REV	DOCUMENT	CHANGED BY	CHECK
7	0034444	JA 12OCT07	PSR

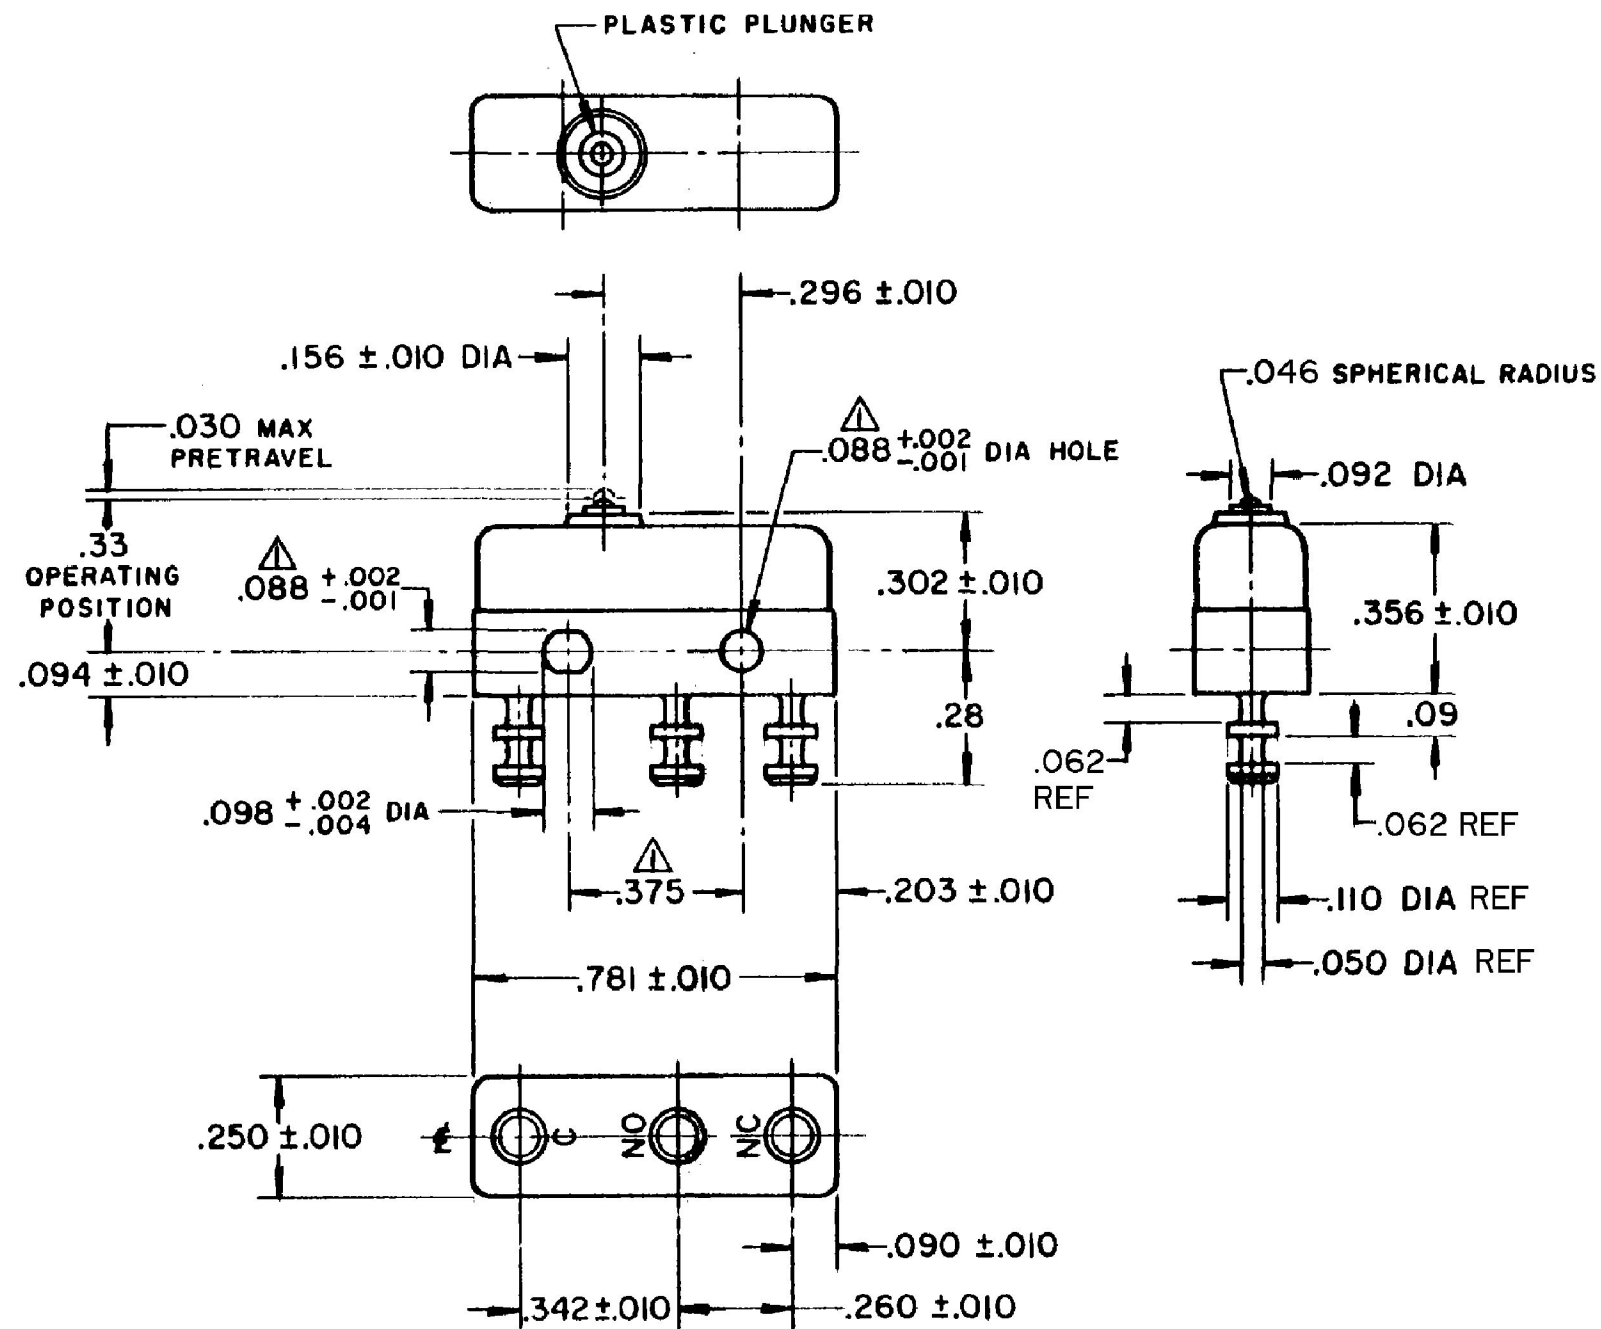

- NOTE -
- △-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 - 2- TERMINALS ARE PLATED FOR SOLDERING
 - 3- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.:
SR- 9056
REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	JA	12OCT07		Honeywell				
OPERATING FORCE-----3-5 OZ.		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:				CHECK	PSR	12OCT07						
RELEASE FORCE-----1 OZ. MIN.		30 VOLTS DC RATING				NO PLACE X ± 0.040				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE				
						ONE PLACE .X ± 0.030												
						TWO PLACE .XX ± 0.015												
						THREE PLACE .XXX ± 0.005												
DIFFERENTIAL TRAVEL-----.004 MAX.		INDUCTIVE	1/2 AMP	1/2 AMP	THREE PLACE .XXX ± 0.005	FOUR PLACE .XXXX ± 0.0005	ANGLES ± 2	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV		
		RESISTIVE	1 AMP	1 AMP	THREE PLACE .XXX ± 0.005	FOUR PLACE .XXXX ± 0.0005	ANGLES ± 2					B	I	1SM23-T2		7		
OVERTRAVEL-----.005 MIN.		MAXIMUM INRUSH 2 AMP				THIRD ANGLE PROJECTION				RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1
		KEMA CE	1A 250V~ T85 1E4	UL, CSA	1A 125 VAC													