



HONEYWELL
PART NUMBER
1SM263
PRODUCT CODE
TW-C6300

REV	DOCUMENT	CHANGED BY	CHECK
5	0034444	JA 15OCT07	PSR

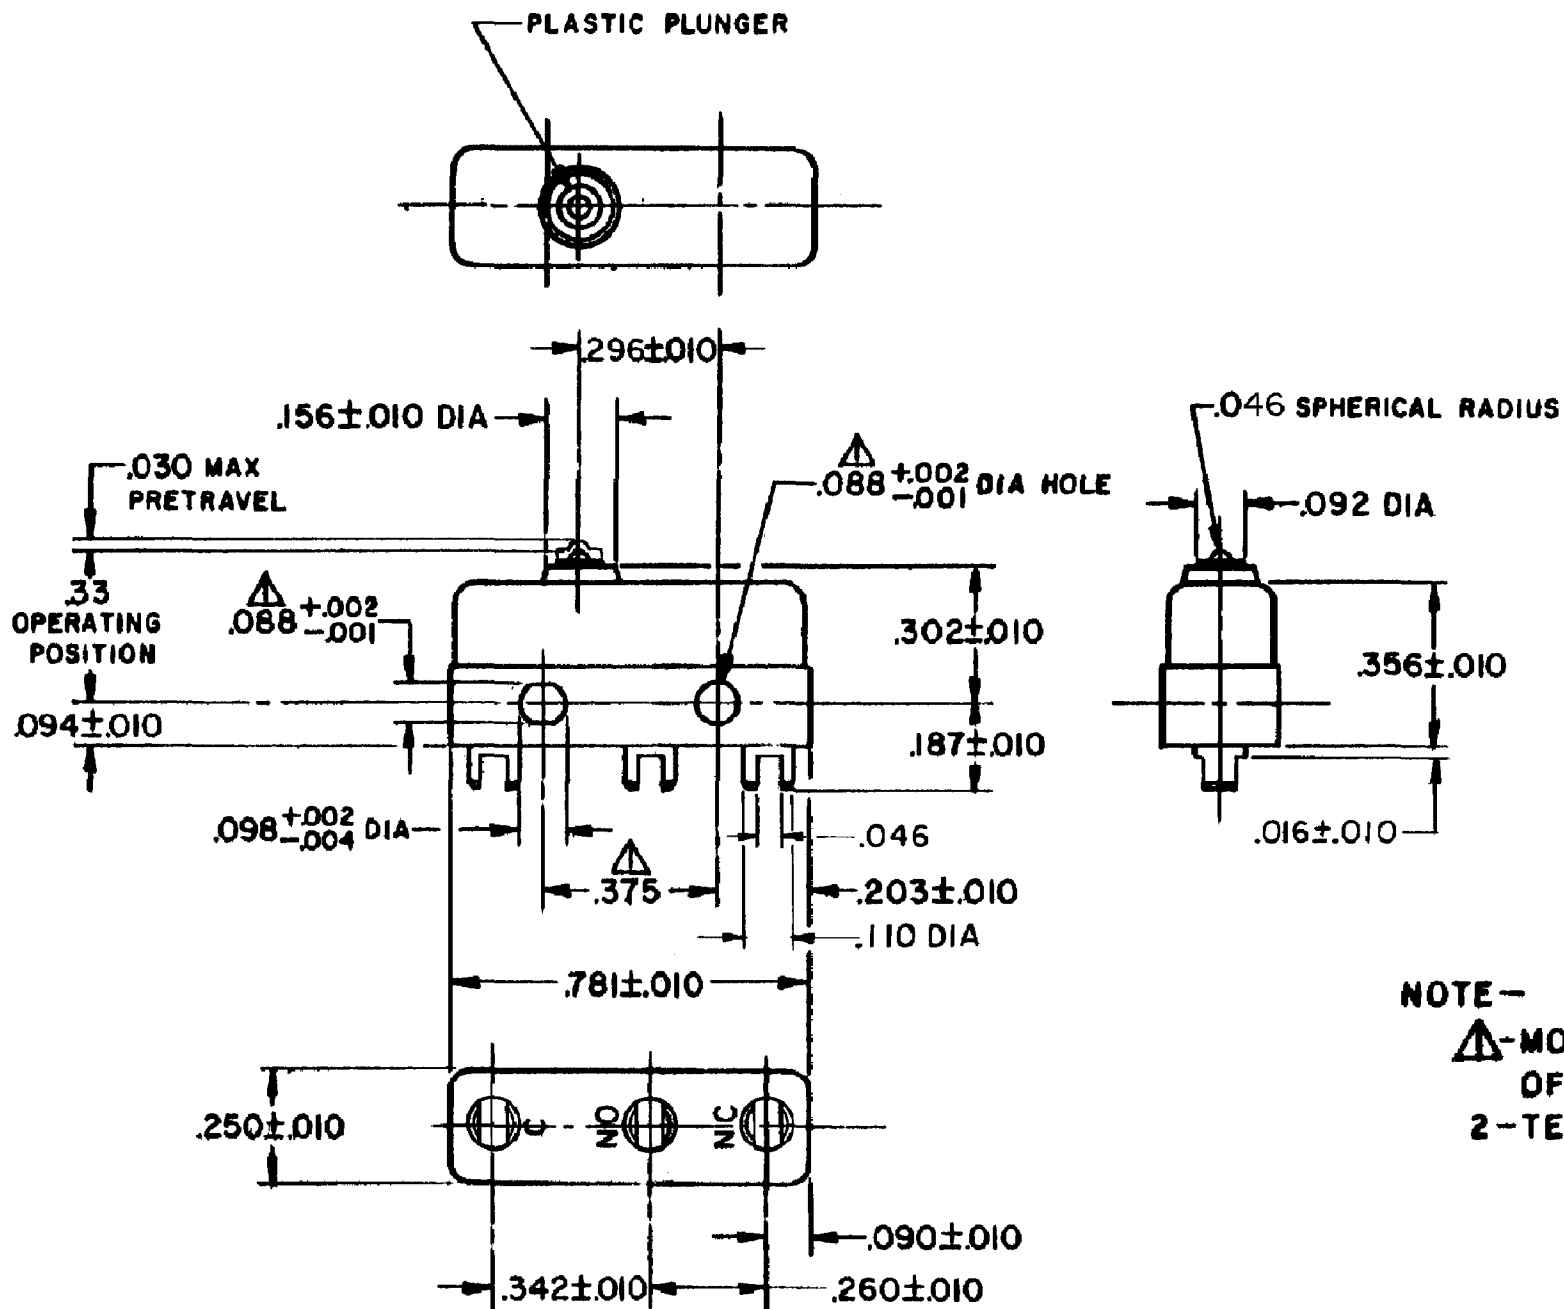

NOTE—
▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375±.002 CENTERS
2-TERMINALS ARE PARTIALLY PLATED FOR SOLDERING

RELEASE NO.:
SR-9953
REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ± 2		DRAWN	JA	15OCT07	Honeywell				
OPERATING FORCE-----3-5 OZ.		CONTACT ARRANGEMENT SPDT						CHECK	PSR	15OCT07					
RELEASE FORCE-----1 OZ. MIN.		30 VOLTS DC RATING				THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH-BASIC				
DIFFERENTIAL TRAVEL-----.004 MAX.				SEA LEVEL	50,000 FT										
OVERTRAVEL-----.005 MIN.		INDUCTIVE		3 AMP	2.5 AMP			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE		5 AMP	5 AMP						B	I	1SM263		5
		MAXIMUM INRUSH 24 AMP						RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4		UL, CSA	5A, 250 VAC					BRAND L4			