


HONEYWELL
PART NUMBER
1SM282
PRODUCT CODE
TW-C8200

REV	DOCUMENT	CHANGED BY	CHECK
5	0034444	JA 15OCT07	PSR

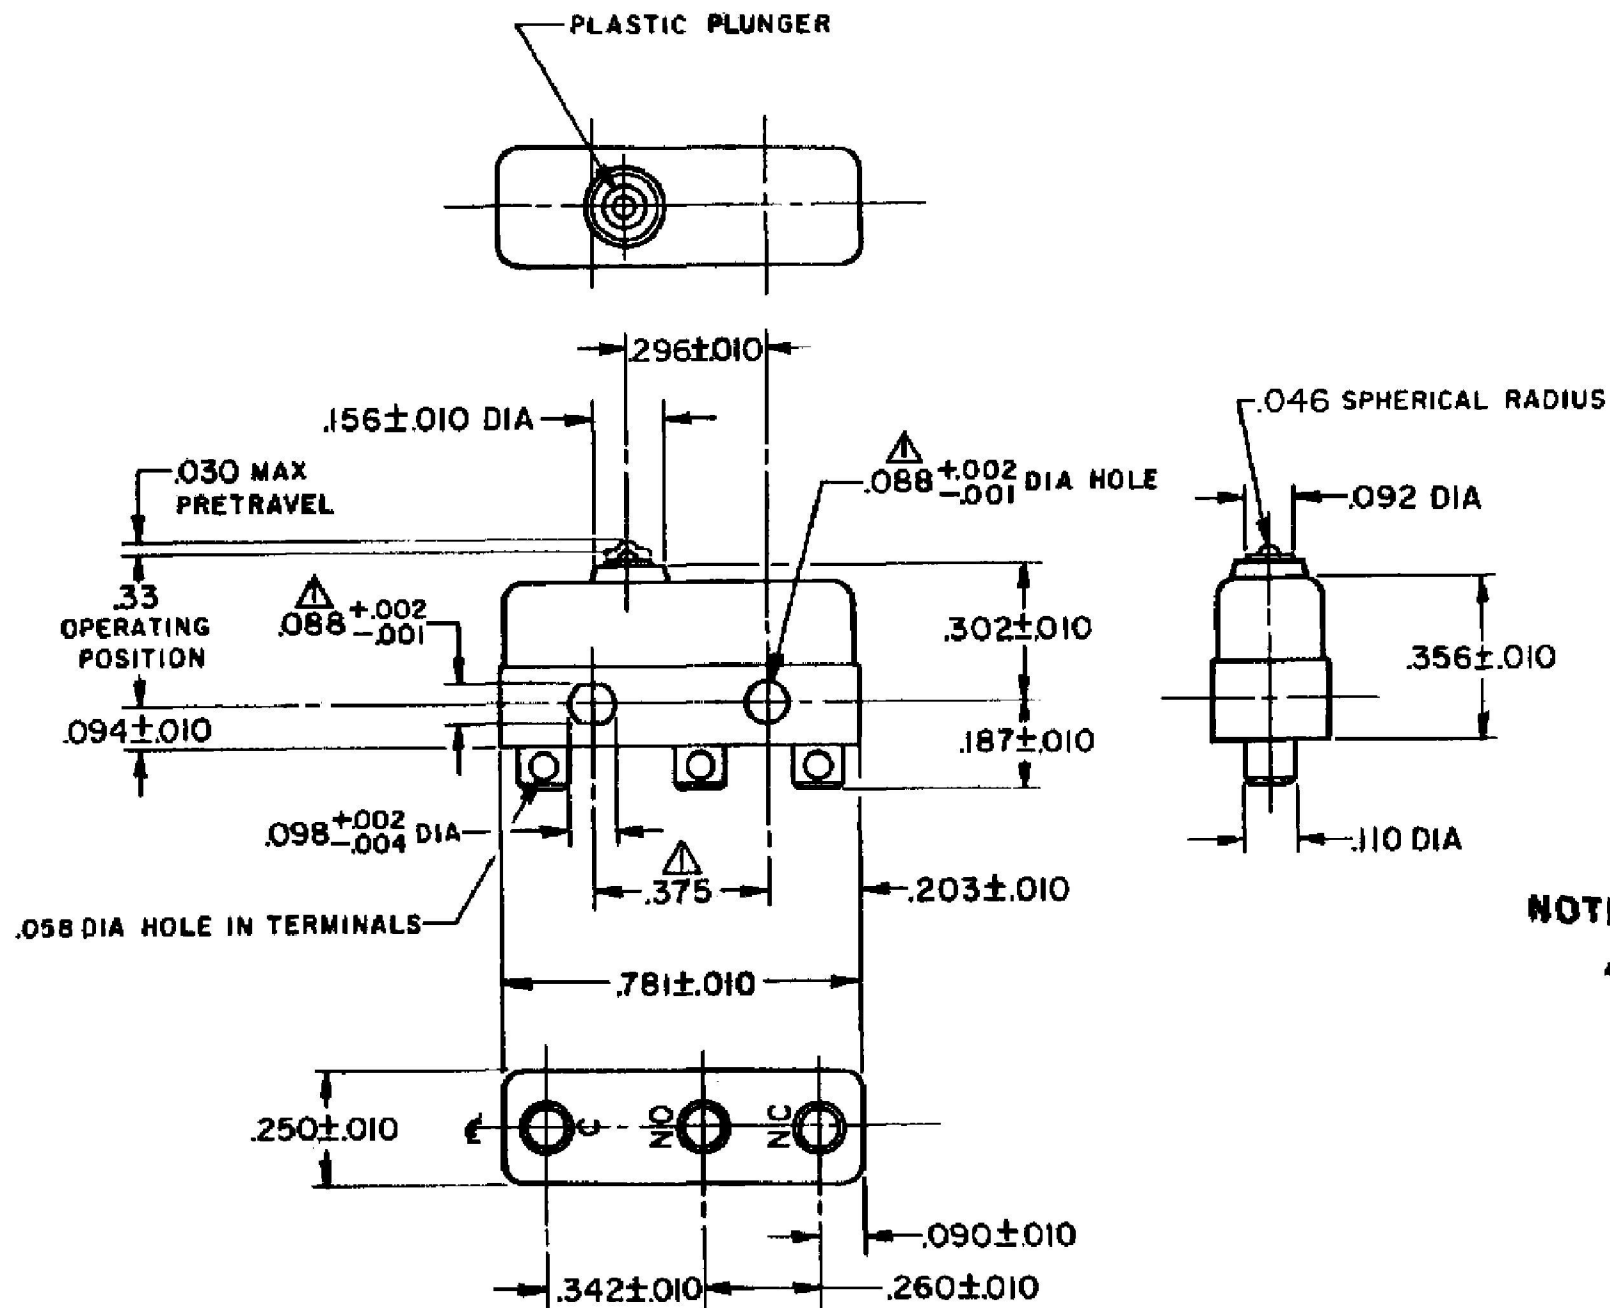

NOTE—
▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING
3-SWITCH WILL WITHSTAND TEMPERATURE OF

RELEASE NO.:
SR-10975
REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	JA	15OCT07	Honeywell			
OPERATING FORCE-----3-5 OZ.		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK	PSR	15OCT07				
RELEASE FORCE-----1 OZ. MIN.		30 VOLTS DC RATING			NO PLACE X ± 0.040		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE			
DIFFERENTIAL TRAVEL-----.002 MAX		INDUCTIVE			ONE PLACE .X ± 0.030								
OVERTRAVEL-----.005 MIN		RESISTIVE			TWO PLACE .XX ± 0.015								
		MAXIMUM INRUSH 24 AMP			THREE PLACE .XXX ± 0.005		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
					FOUR PLACE .XXXX ± 0.0005					B	I	1SM282	5
					ANGLES ± 2		RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
					THIRD ANGLE PROJECTION								