
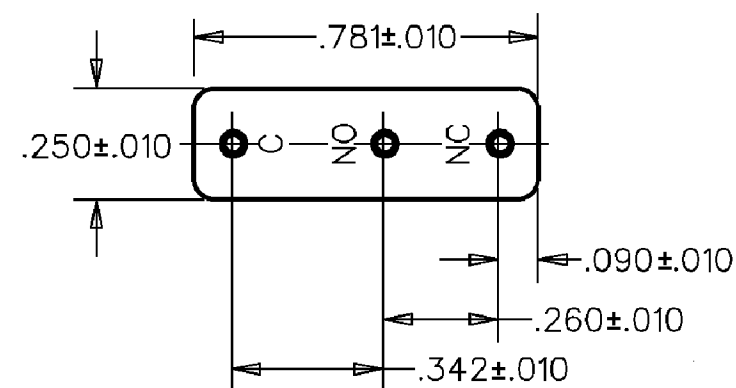
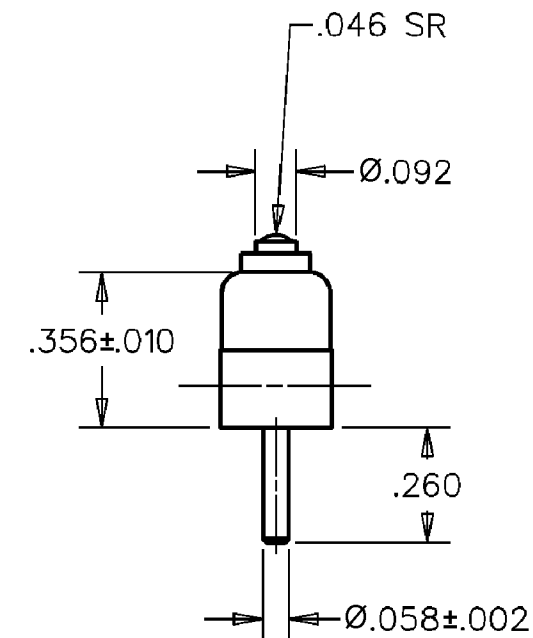
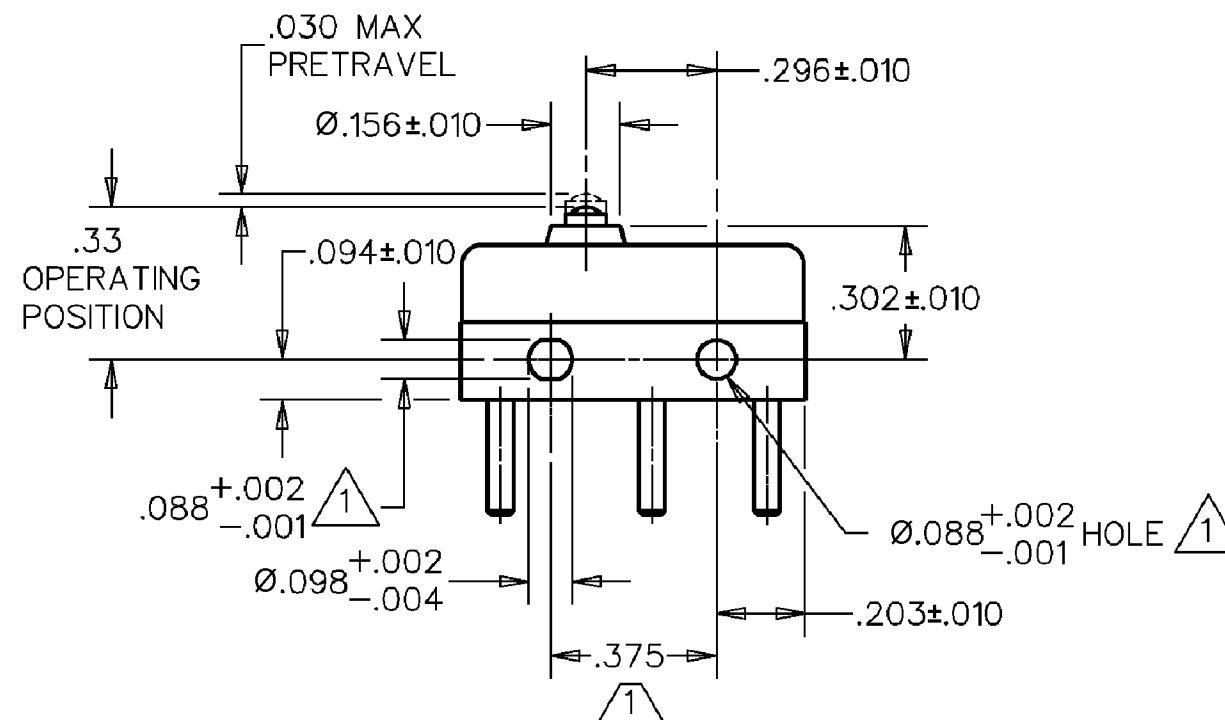


REV	DOCUMENT	CHANGED BY	CHECK
4	0058669	KNR 11NOV09	CMH

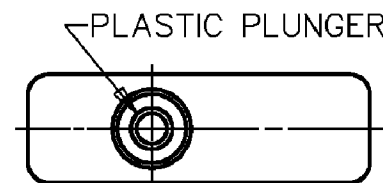

4 - MINIMUM EXPECTED MECHANICAL LIFE 10,000 OPERATIONS

X91813-SM

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	JA	16OCT07	Honeywell				
OPERATING FORCE----- 4 OZ. MAX.		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK	PSR	16OCT07					
RELEASE FORCE----- 1 OZ. MIN.		30 VOLTS DC RATING			NO PLACE X ± .040		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH-BASIC				
		SEA LEVEL 50,000 FT			ONE PLACE .X ± .030									
DIFFERENTIAL TRAVEL----- .001 - .002		INDUCTIVE 3 AMP 2.5 AMP			TWO PLACE .XX ± .015									
		RESISTIVE 5 AMP 5 AMP			THREE PLACE .XXX ± .005									
OVERTRAVEL----- .010 MIN.		MAXIMUM INRUSH 24 AMP			FOUR PLACE .XXXX ± .0005		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B				
		KEMA, CE 5A, 250V ~ T85 1E4  CE			ANGLES ± 2°									
		UL, CSA 5A, 250 VAC  BRAND L4			THIRD ANGLE PROJECTION					TYPE I				
							RASTER							
										REV 4				
										SHEET 1 OF 1				