


HONEYWELL
PART NUMBER
1SM379-H2
PRODUCT CODE
TWD3790

REV	DOCUMENT	CHANGED BY	CHECK
9	0034444	JA 16OCT07	PSR

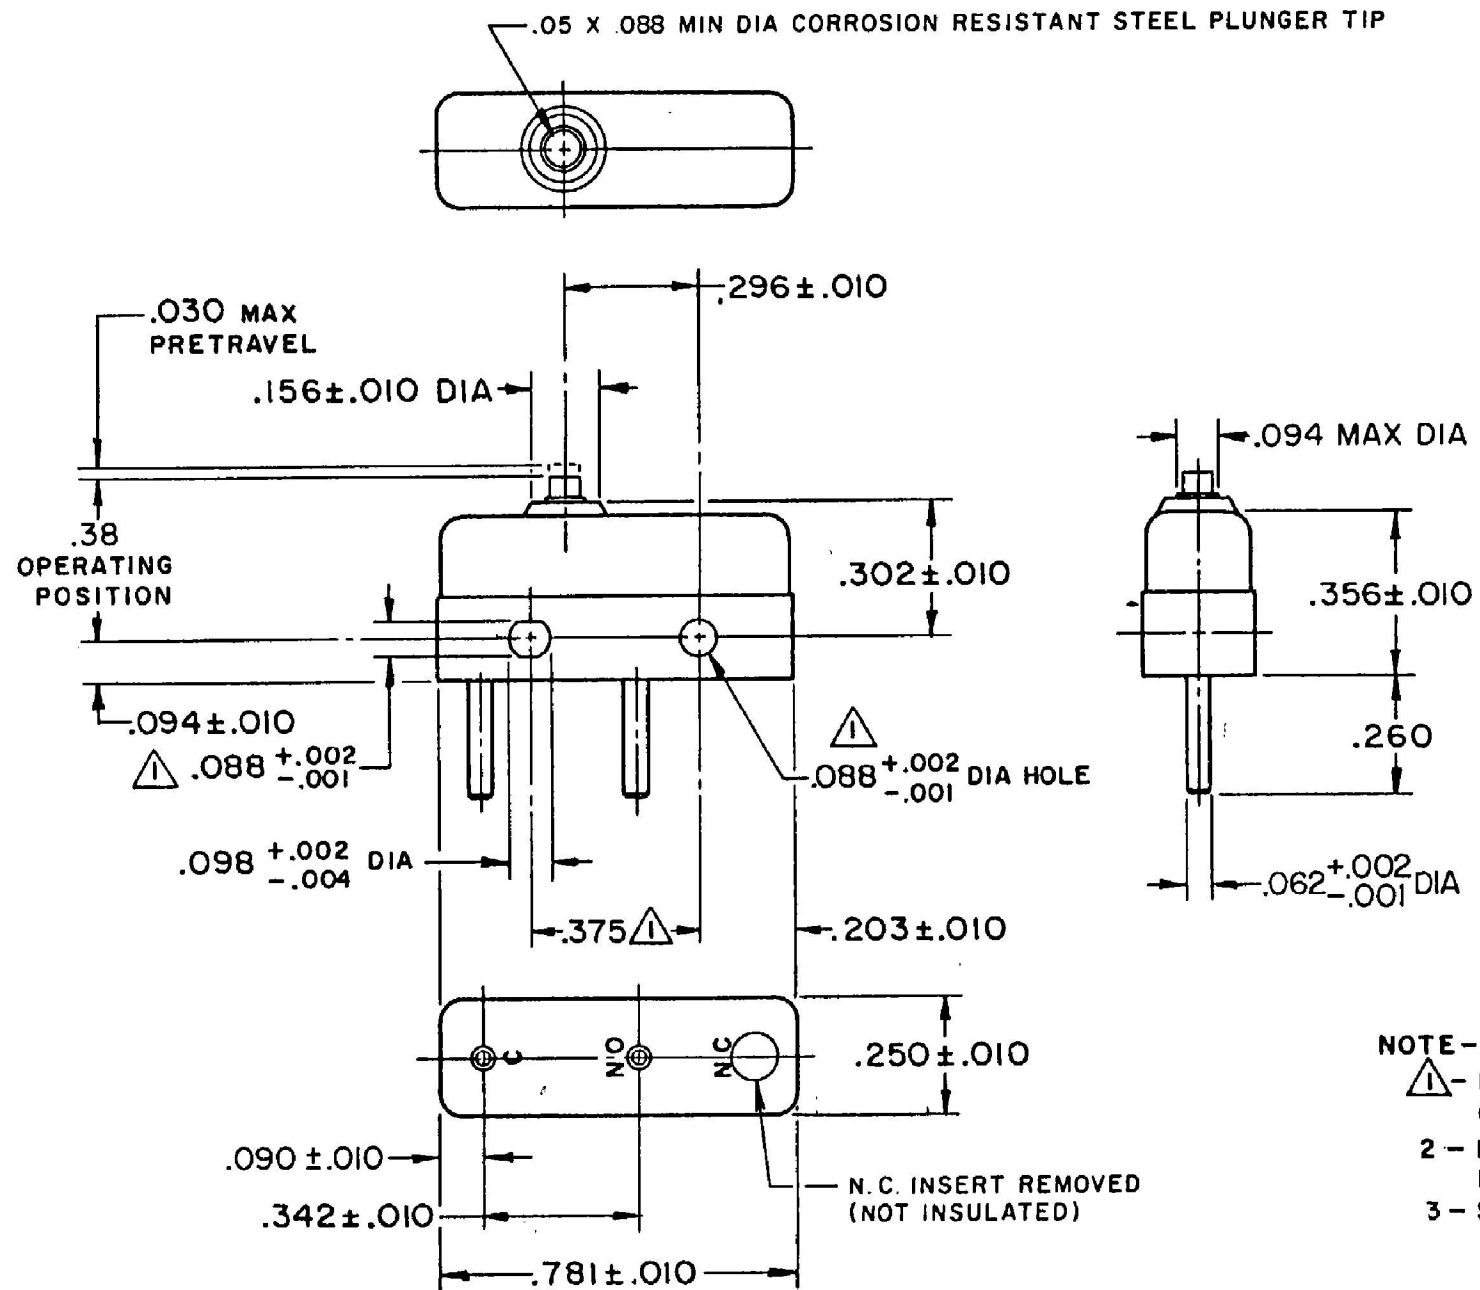

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - PLATED TERMINALS WILL ACCEPT AIRCRAFT MARINE PRODUCTS CO NO. 42429 CONNECTOR
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F

RELEASE NO.:
PR-20752
REPLACES
-

CHARACTERISTICS	
OPERATING FORCE	5-9 OZ
RELEASE FORCE	2 OZ MIN
DIFFERENTIAL TRAVEL	.008 MAX
OVERTRAVEL	.005 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
		SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP		2.5 AMP
RESISTIVE	5 AMP		5 AMP
MAXIMUM INRUSH 24 AMP			
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	 
	UL, CSA	5A, 250 VAC	  BRAND L4

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ± 0.040
ONE PLACE	.X ± 0.030
TWO PLACE	.XX ± 0.015
THREE PLACE	.XXX ± 0.005
FOUR PLACE	.XXXX ± 0.0005
ANGLES	± 2
THIRD ANGLE PROJECTION	

DRAWN	JA	16OCT07
CHECK	PSR	16OCT07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH-BASIC				
SIZE B	TYPE I	DRAWING NAME 1SM379-H2		REV 9
SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1		