


REV	DOCUMENT	CHANGED BY	CHECK
12	0038442	SSK 31MAR08	BLR

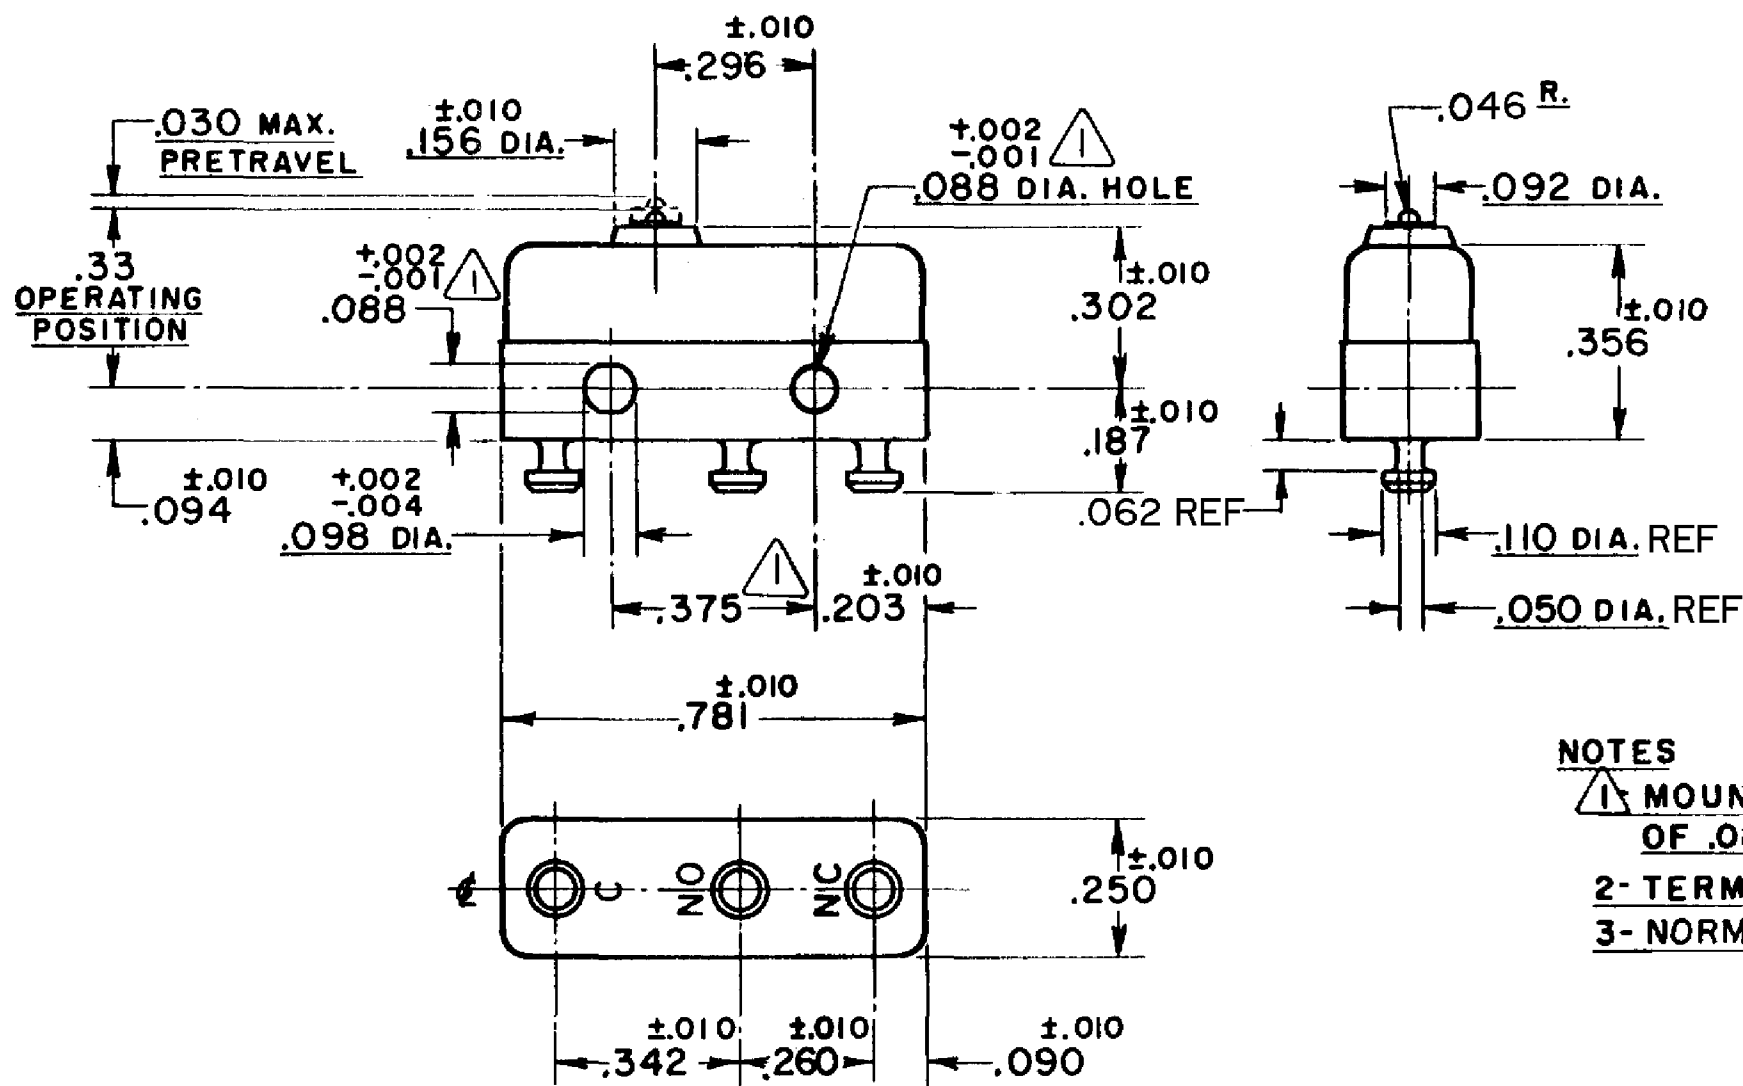


**⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX. DIA. ON .375^{±.002} CENTERS.**

2- TERMINALS ARE PLATED FOR SOLDERING.

3- NORMALLY OPEN MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	VK	10 DEC 07	Honeywell				
OPERATING FORCE — — 3 - 5 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	10 DEC 07					
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE							
DIFFERENTIAL TRAVEL— — — .004 MAX												SWITCH - BASIC		
OVERTRAVEL — — — — — .005 MIN		MAXIMUM INRUSH 2 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME			
							THIRD ANGLE PROJECTION 		RASTER			B	I	1SM46-T
										SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	