


HONEYWELL
PART NUMBER

1SM817-T

PRODUCT CODE
TWE8017

REV	DOCUMENT	CHANGED BY	CHECK
6	0034444	JA 16OCT07	PSR

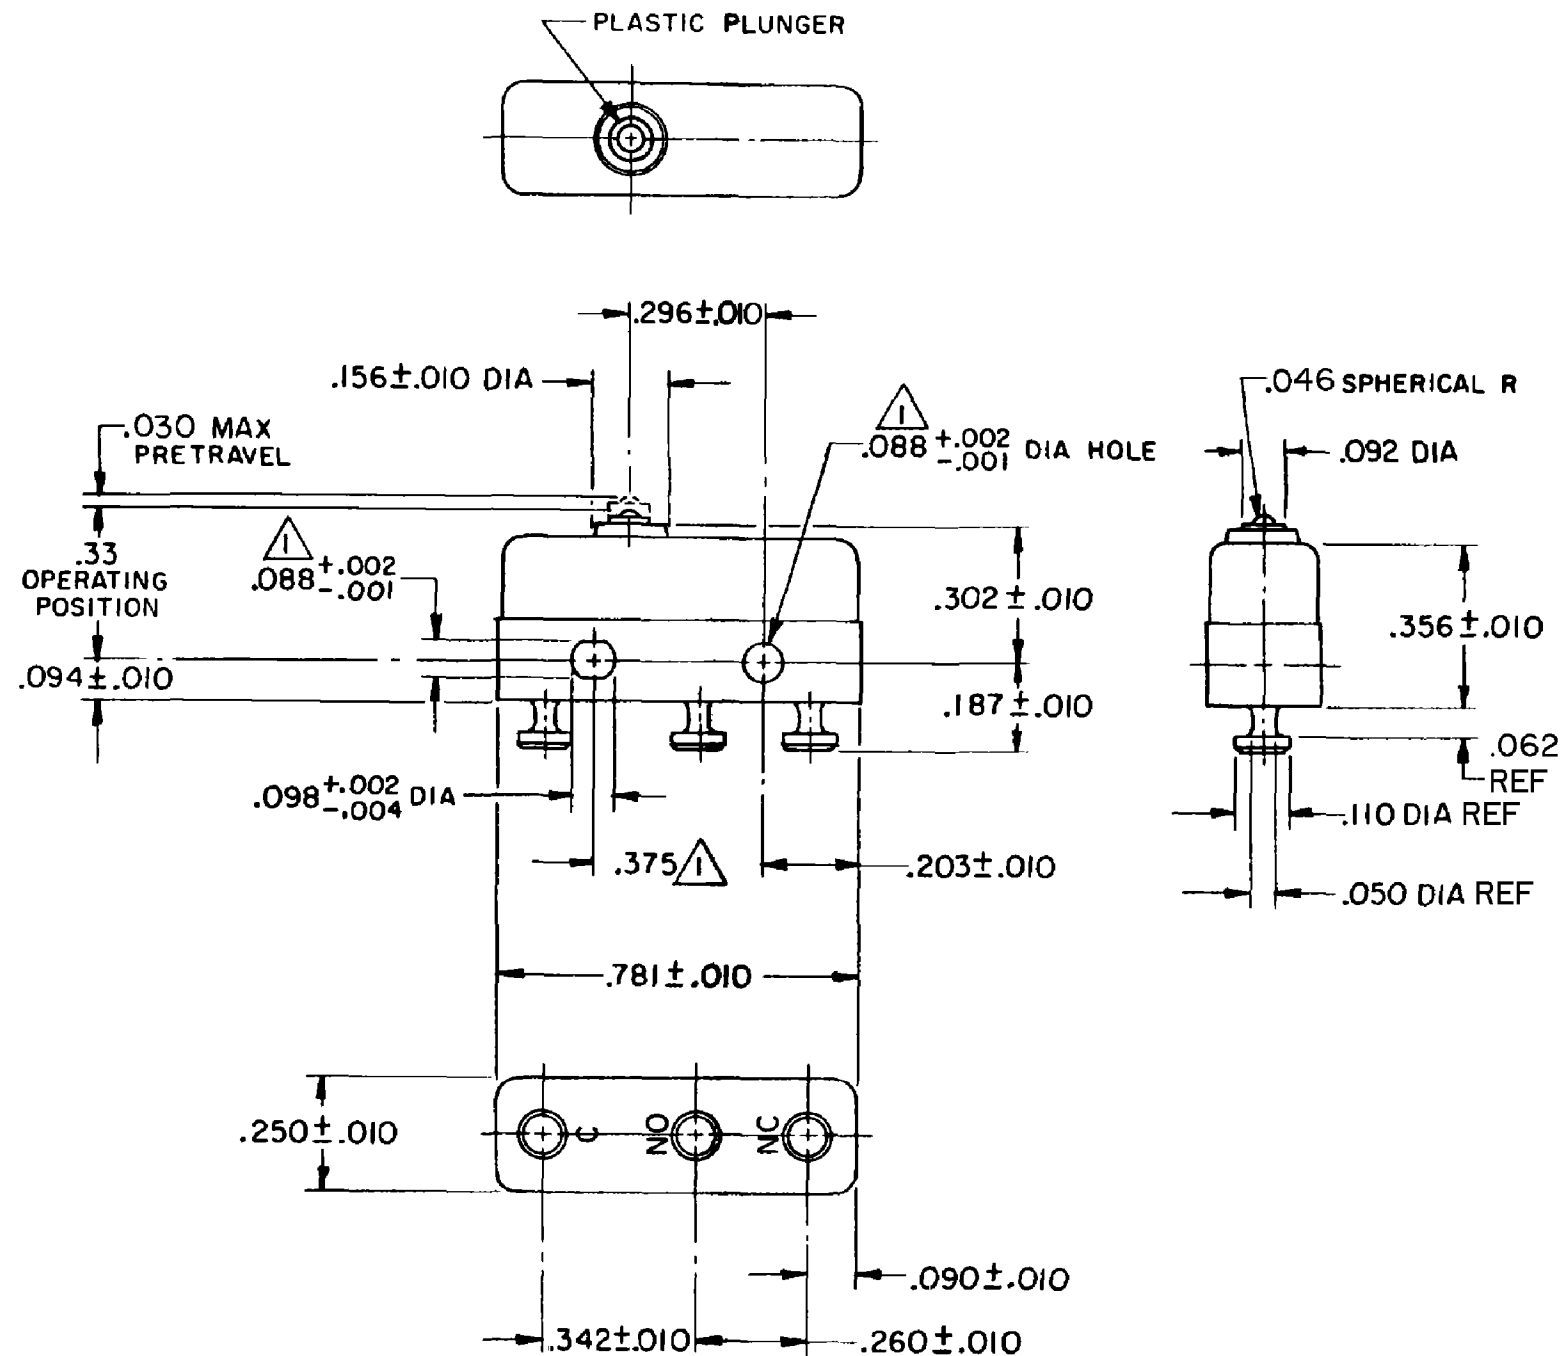

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.:

PR-5692

REPLACES
X63948-SM

CHARACTERISTICS

OPERATING FORCE-----3-5 OZ.

RELEASE FORCE-----1 OZ. MIN.

DIFFERENTIAL TRAVEL-----.002 MAX.

OVERTRAVEL-----.005 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

INDUCTIVE 3 AMP 50,000 FT

RESISTIVE 5 AMP 5 AMP

MAXIMUM INRUSH 24 AMP

KEMA, CE 5A, 250V ~ T85 1E4

UL, CSA 5A, 250 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X $\pm$ 0.040ONE PLACE .X $\pm$ 0.030TWO PLACE .XX $\pm$ 0.015THREE PLACE .XXX $\pm$ 0.005FOUR PLACE .XXXX $\pm$ 0.0005ANGLES $\pm$ 2

THIRD ANGLE PROJECTION



DRAWN

JA

16OCT07

CHECK

PSR

16OCT07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH-BASIC

SIZE

B

TYPE

I

DRAWING NAME

1SM817-T

REV

6

SCALE

-

SHEET

1 OF 1