


REV	DOCUMENT	CHANGED BY	CHECK
5	0038446	KVB 20MAY08	BLR

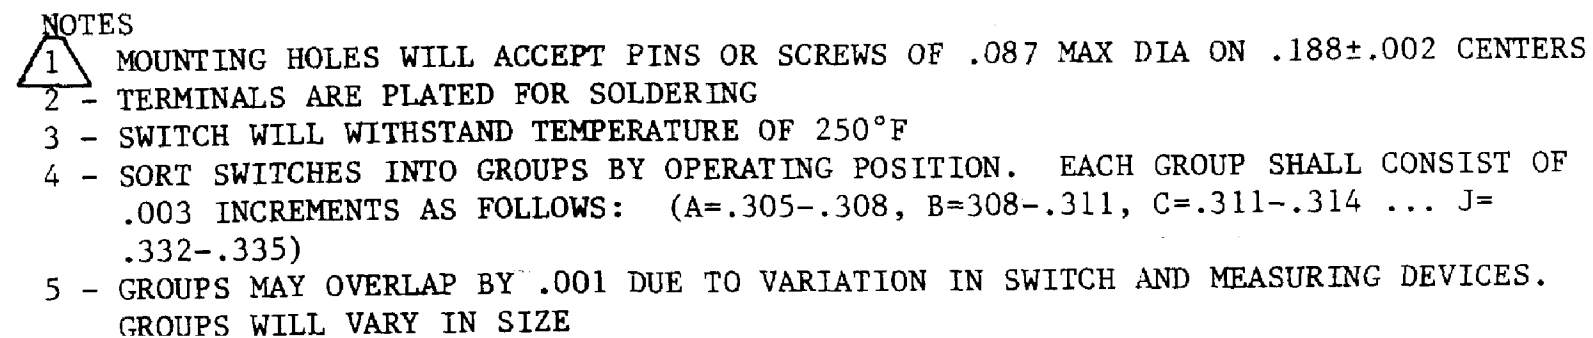

RELEASE NO.	PR-15679
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±			DRAWN	SPK	26NOV07	Honeywell				
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT S P D T						CHECK	RJ	26NOV07					TITLE SWITCH - BASIC
RELEASE FORCE— — — — 1 OZ MIN		28 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 1SX1-T-C		
	SEA LEVEL	50,000 FT													
INDUCTIVE	4 AMP	2.5 AMP													
RESISTIVE	7 AMP	7 AMP													
DIFFERENTIAL TRAVEL— — — .005 MAX		MAXIMUM INRUSH 24 AMP			THIRD ANGLE PROJECTION			RASTER			SCALE -	WEIGHT:.003 LB MAX	SHEET 1 OF 1		
OVERTRAVEL — — — — — .004 MIN		APPROVALS	KEMA, CE	7A 250V ~ T125 5E4		UL, CSA	7A 250 VAC			BRAND L7					