



REV	DOCUMENT	CHANGED BY	CHECK
4	0038446	KVB 20MAY08	BLR

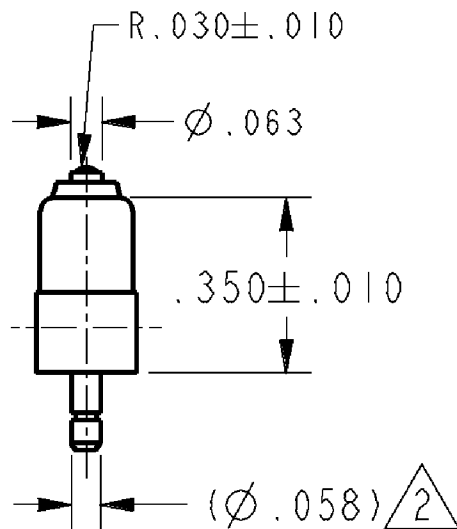

- NOTES

 - ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .087$ MAX ON
 $.188 \pm .002$ CENTERS
 - ② PLATED TERMINALS WILL ACCEPT "AMP INC." $\varnothing .058$ PIN RECEPTACLES
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 - SWITCH HAS A GREATER BREAK DISTANCE THAN STANDARD CONSTRUCTION
 ADDITIONAL BREAK DISTANCE WILL TEND TO REDUCE MECHANICAL LIFE

RELEASE NO.	202251
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	31JAN08	Honeywell				
OPERATING FORCE — — — — 6 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	31JAN08					TITLE SWITCH - BASIC
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY							
DIFFERENTIAL TRAVEL— .0045 - .0055			SEA LEVEL	50,000 FT										
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE	2 AMP	1.5 AMP										
		RESISTIVE	3.5 AMP	3.5 AMP										
		250 VAC ----- 4 AMP			THIRD ANGLE PROJECTION 		RASTER							
		APPROVALS	KEMA, CE	7A 250V ~ T125 5E4    BRAND L7										
			UL, CSA	7A 250 VAC  			SIZE B				TYPE I	DRAWING NAME 1SX100-H58		REV 4
							SCALE -				WEIGHT:.003 LB MAX		SHEET 1 OF 1	