

HONEYWELL PART NUMBER
1SX26-C
PRODUCT CODE VDA2601

REV	DOCUMENT	CHANGED BY	CHECK
5	0038446	KVB 20MAY08	BLR



B

A

A

B

A

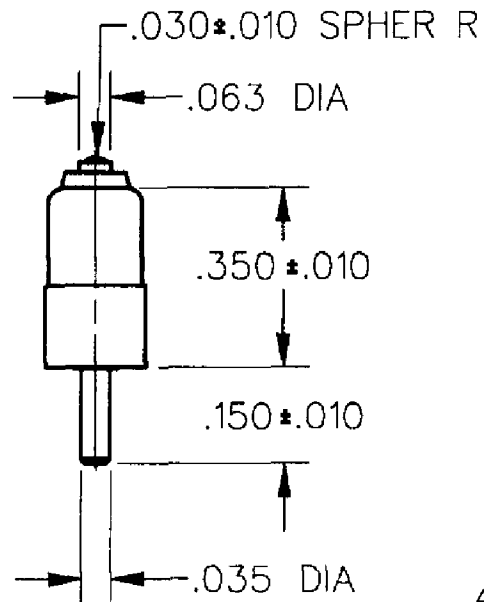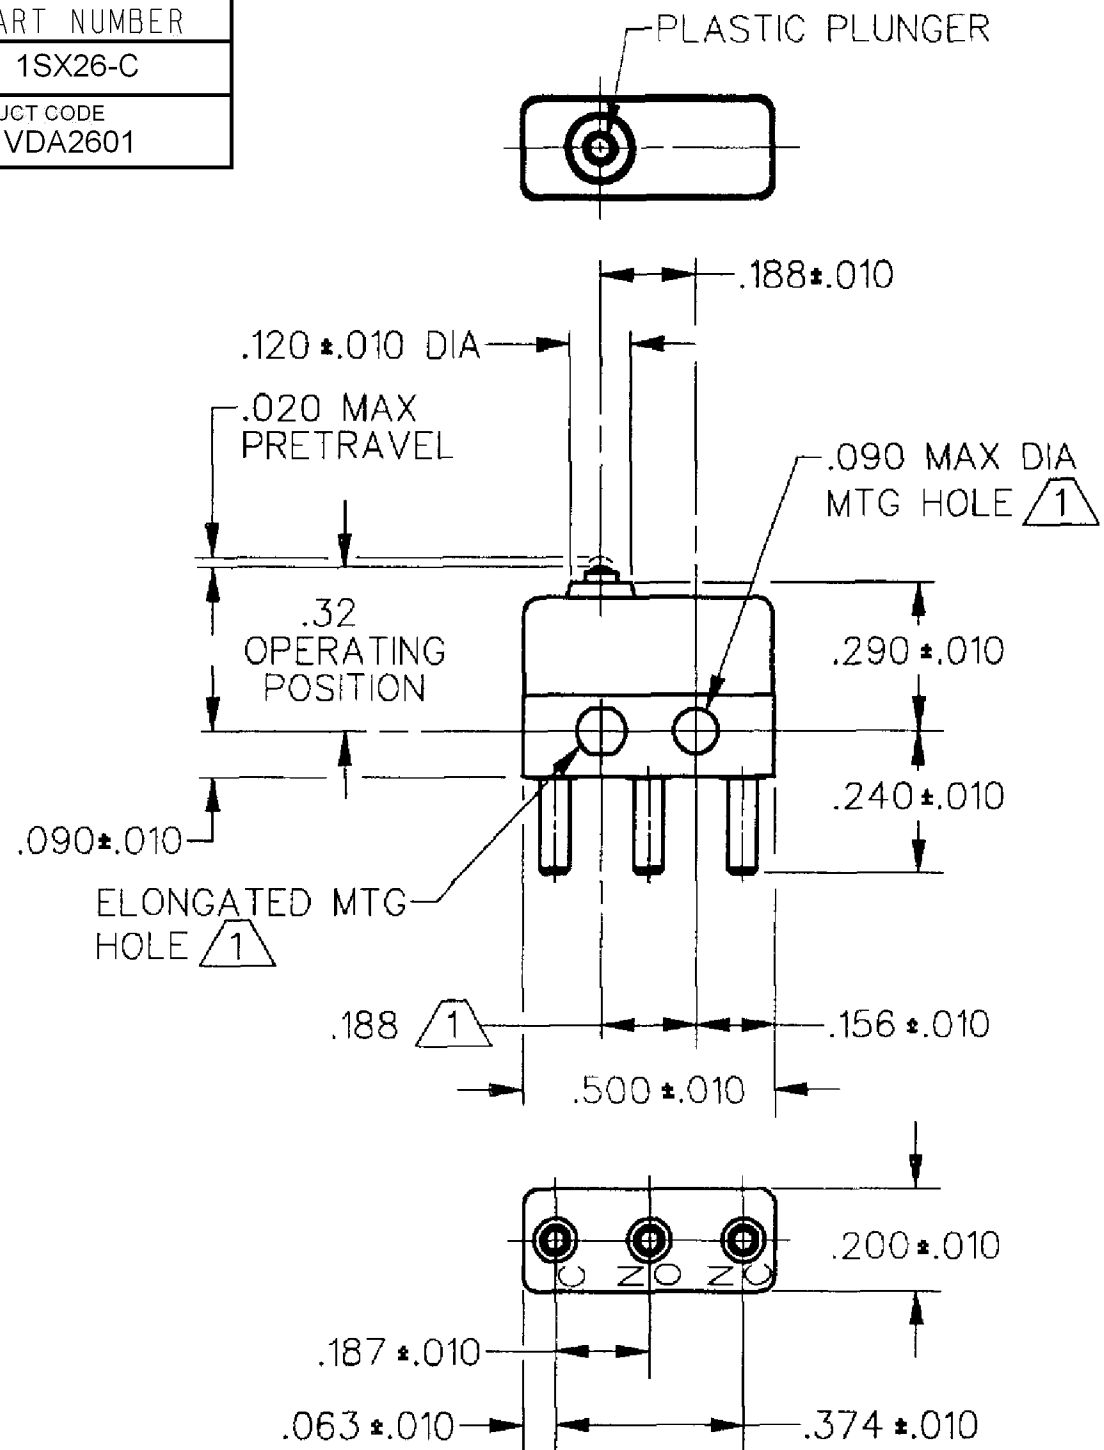

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 4 - SORT SWITCHES INTO GROUPS BY OPERATING POSITION. EACH GROUP SHALL CONSIST OF .003 INCREMENTS AS FOLLOWS: (A=.305-.308, B=.308-.311, C=.311-.314.....J=.332-.335) GROUPS MAY OVERLAP BY .001 DUE TO VARIATION IN SWITCH AND MEASURING DEVICES. GROUPS WILL VARY IN SIZE

RELEASE NO. PR-17365

REPLACES -

CHARACTERISTICS
OPERATING FORCE - - - - 5 OZ MAX
RELEASE FORCE - - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .005 MAX
OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
28 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP	2.5 AMP
RESISTIVE	7 AMP	7 AMP
MAXIMUM INRUSH 24 AMP		
APPROVALS	KEMA, CE	7A 250V~ T125 5E4
	UL, CSA	7A 250 VAC

DESIGN UNITS: INCH		
TOLERANCES UNLESS NOTED:		
NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±
THIRD ANGLE PROJECTION		

DRAWN	SPK	30NOV07
CHECK	RJ	30NOV07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH - BASIC				
SIZE	TYPE	DRAWING NAME		REV
B	I	1SX26-C		5
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1	