

HONEYWELL PART NUMBER
1SX48-H58
PRODUCT CODE VDA4298

REV	DOCUMENT	CHANGED BY	CHECK
7	0038446	KVB 20MAY08	BLR

B



A

A

B

A

A

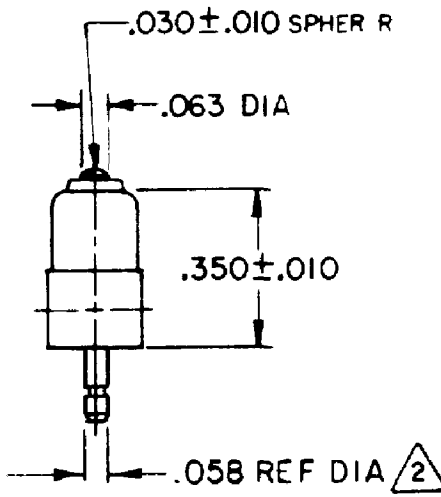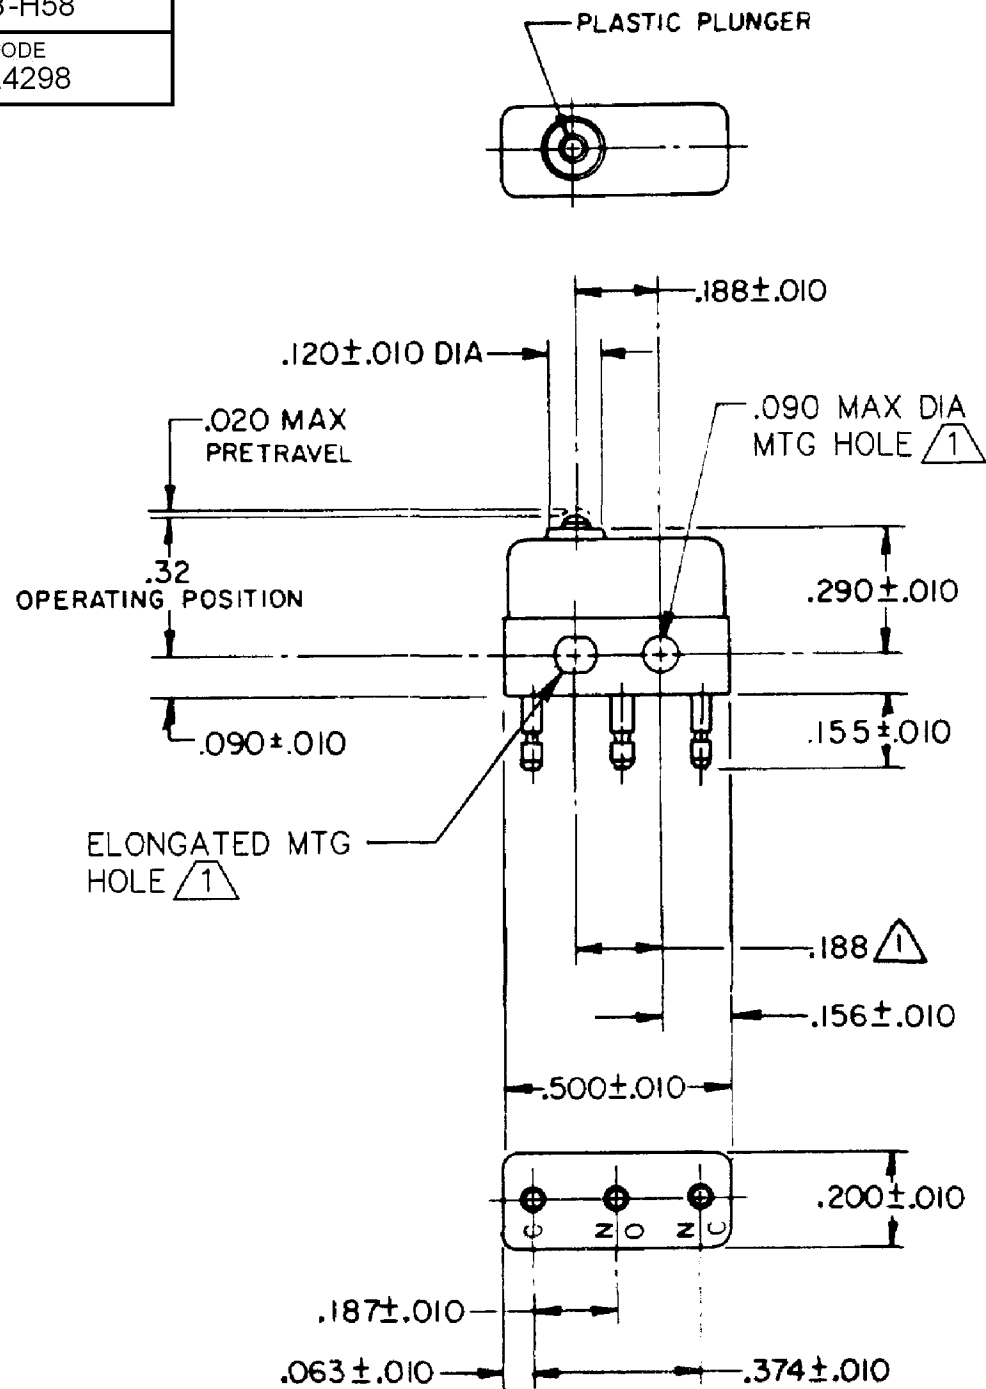

- NOTES
- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - (2) PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 - SWITCH HAS A GREATER OVERTRAVEL THAN STANDARD CONSTRUCTION. ADDITIONAL OVERTRAVEL WILL TEND TO REDUCE MECHANICAL LIFE

RELEASE NO.	PR-11856
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH			DRAWN	SPK	03DEC07	Honeywell				
OPERATING FORCE – – – – 5 OZ MAX		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:			CHECK	RJ	03DEC07					
RELEASE FORCE – – – – – 1 OZ MIN		28 VOLTS DC RATING			NO PLACE X ±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE				
DIFFERENTIAL TRAVEL – – – .005 MAX					ONE PLACE .X ±										
OVERTRAVEL – – – – – .010 MIN		SEA LEVEL 50,000 FT			TWO PLACE .XX ±										
		INDUCTIVE 4 AMP 2.5 AMP			THREE PLACE .XXX ±										
		RESISTIVE 7 AMP 7 AMP			FOUR PLACE .XXXX ±			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		MAXIMUM INRUSH 24 AMP			ANGLES ±						B	I	1SX48-H58		7
		APPROVALS	KEMA, CE	7A 250V ~ T125 5E4		05	CE	THIRD ANGLE PROJECTION			SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1	
			UL, CSA	7A 250 VAC		RJ	CF								BRAND L7