


REV	DOCUMENT	CHANGED BY	CHECK
5	0038446	KVB 20MAY08	BLR

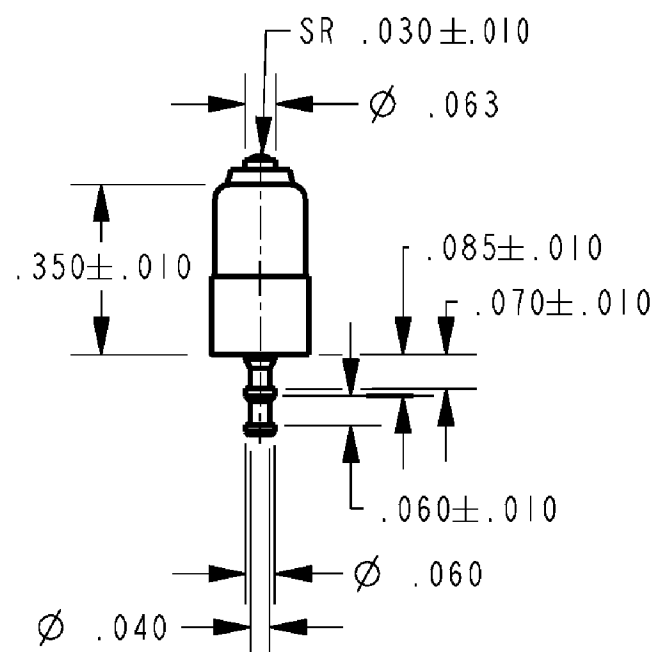

- NOTES
-  MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .087$ MAX
ON $.188 \pm .002$ CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.	PR-19186
REPLACES	X93293-SX

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	03DEC07	Honeywell TITLE SWITCH - BASIC			
OPERATING FORCE - - - - 5 OZ MAX		CONTACT ARRANGEMENT S P D T					CHECK	RJ	03DEC07				
RELEASE FORCE - - - - 1 OZ MIN		28 VOLTS DC RATING					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE B TYPE I DRAWING NAME 1SX89-T2 REV 5			
DIFFERENTIAL TRAVEL - - - .005 MAX		SEA LEVEL 50,000 FT											
OVERTRAVEL - - - - - .004 MIN		INDUCTIVE 4 AMP 2.5 AMP											
		RESISTIVE 7 AMP 7 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SCALE - WEIGHT: .003 LB MAX SHEET 1 OF 1			
		MAXIMUM INRUSH 24 AMP											
		APPROVALS	KEMA, CE	7A 250V ~ T125 5E4		THIRD ANGLE PROJECTION 	RASTER						
			UL, CSA	7A 250 VAC	BRAND L7								