

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

PREPONT, ILLINOIS

FED. MFR. CODE 91929




SWITCH-BASIC

CATALOG LISTING

ITB24-3

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

PLASTIC PLUNGER

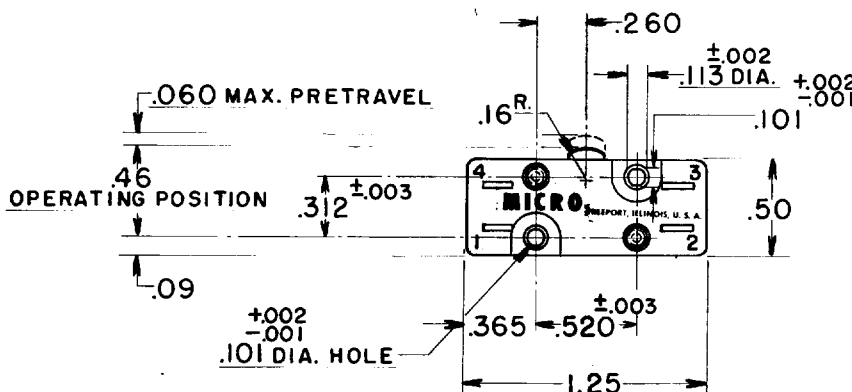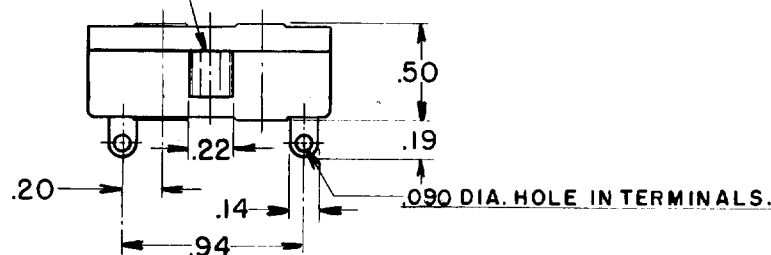

NOTE-

- 1-TERMINALS 1 AND 2 NORMALLY CLOSED CIRCUIT.
- 2-TERMINALS 3 AND 4 NORMALLY OPEN CIRCUIT.
- 3-TERMINALS ARE PLATED FOR SOLDERING.
- 4-SWITCH WILL WITHSTAND TEMPERATURE OF 250°F.



Circuit Diagram

CHARACTERISTICS

OPERATING FORCE ----- 7-13 OZ.

RELEASE FORCE----- 4 OZ. MIN.

DIFFERENTIAL TRAVEL----- .010-.025

OVERTRAVEL----- .010 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT

SEE DIAGRAM

L25 10A-125 OR 250 VAC
1/2HP-125 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .02 LB.

ITB24-3

M

DRAWING
NUMBER

27

35

88

88

REPLACES

RELEASE NO. SR6322

CNT 13 APR. 57

CHECK

3 APR. 57

CHECK

17 APR. 57

KLZ

CHECK

R. G. C. 3, APR. 57

DRAWN

FO-80378