

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PEREGRINE, ILLINOIS
FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
ITB244 - 6

5

ITB244-6

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. SR 10803

CHECK

REVISIONS

A	SR 10803	
	M B F	
	22 FEB 63	
B	COI7893	
	D W V	
	11 MAR 63	
C	CO33498	
	D B W	
	11 JUN 74	
D	CO59824	
	J A S	
	13 SEPT 86	
E	085	
	73449	
	17 NOV 92	
F	REINS	
	PR 20656	
	G R T	
	22 JUN 93	


CHECK

26 JAN 91

CHECK

JAN 62


D W V

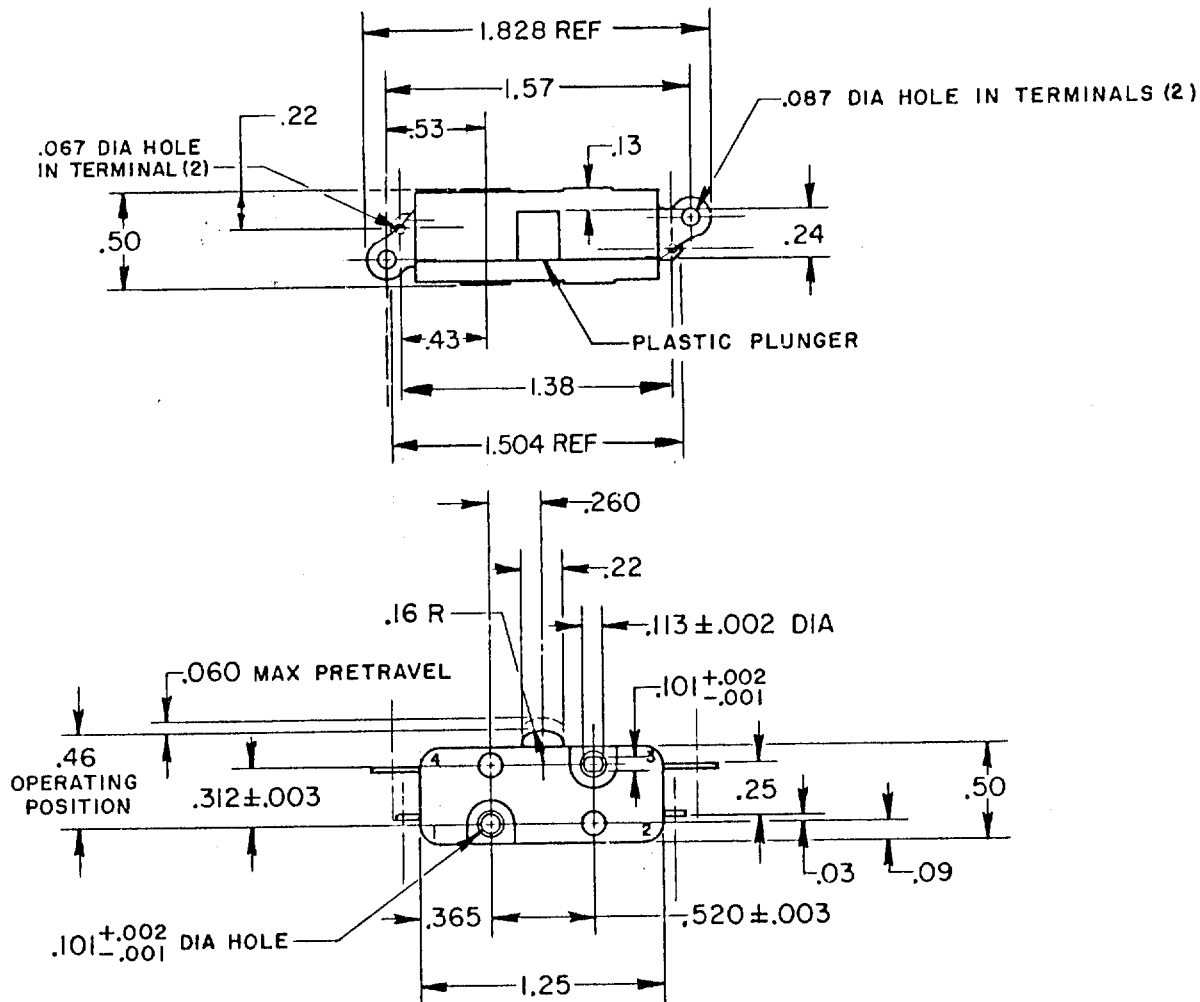

NOTE-

- 1-TERMINALS 1 AND 2 NORMALLY CLOSED CIRCUIT
- 2-TERMINALS 3 AND 4 NORMALLY OPEN CIRCUIT
- 3-TERMINALS ARE PLATED FOR SOLDERING
- 4-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

CIRCUIT DIAGRAM

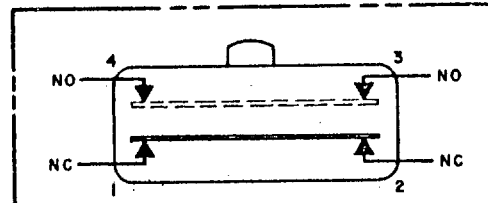

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ———— 7-13 OZ
RELEASE FORCE ———— 4 OZ MIN
DIFFERENTIAL TRAVEL ——— .005-.015
OVERTRAVEL ———— .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

-L25-

10 A-125 OR 250 VAC
1/2 HP-125 VAC

RU



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT