
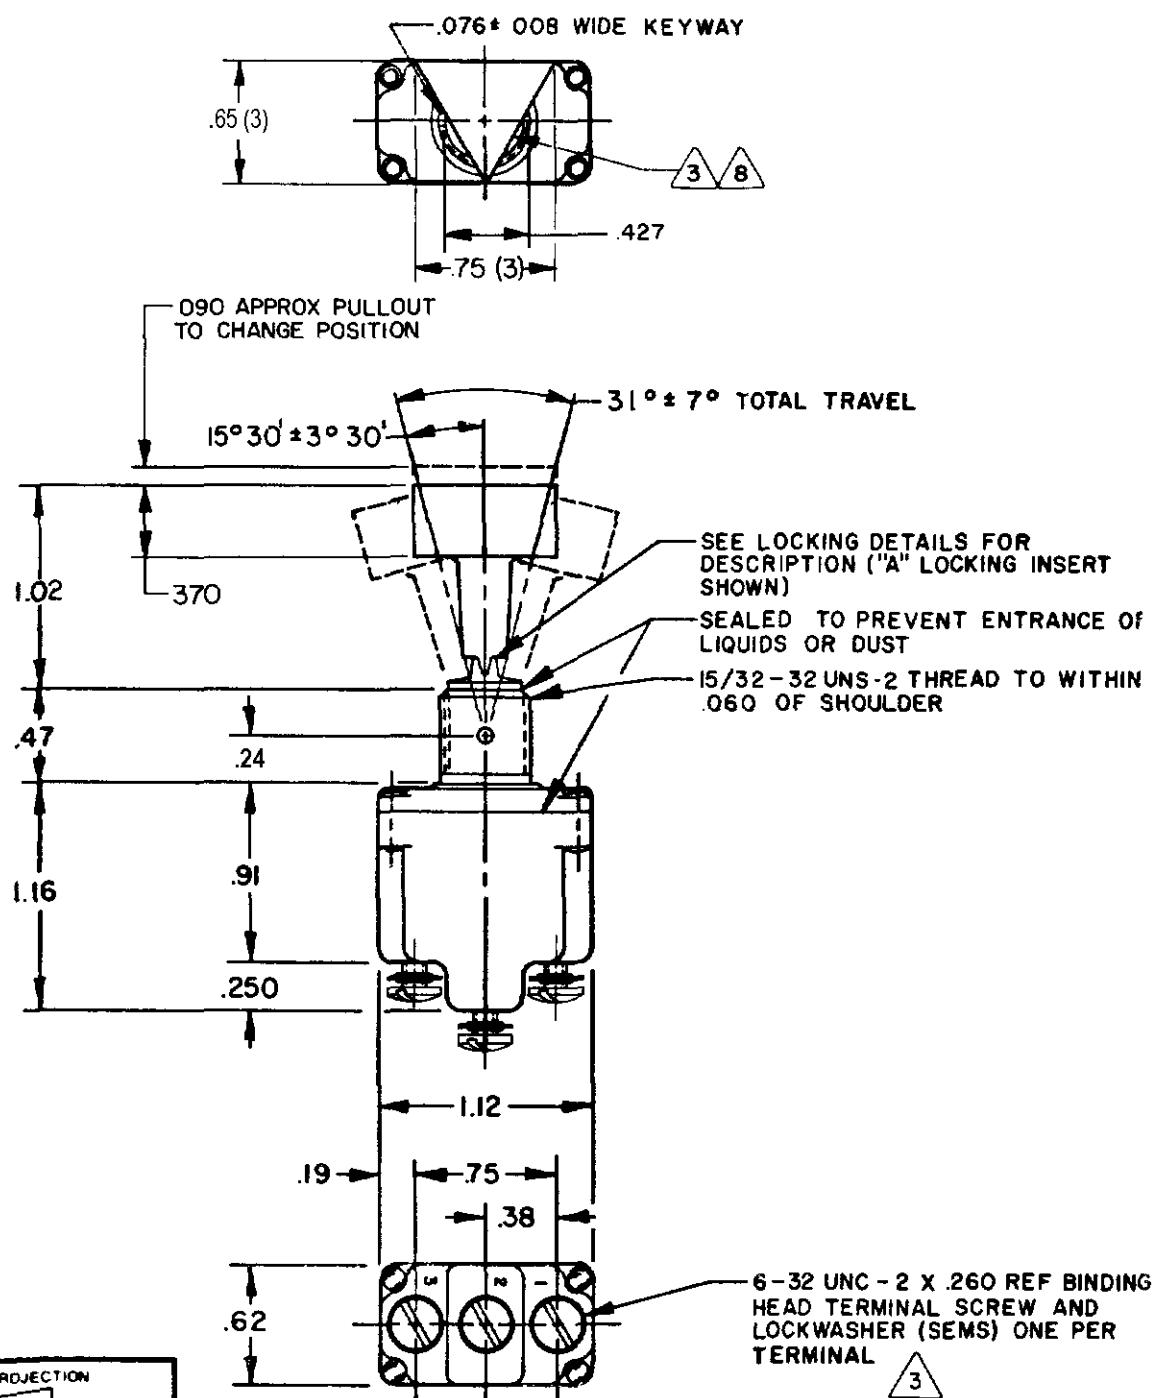





FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 81929


CATALOG LISTING
1TL144 SERIES
CHART I

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
- 5 - KEYWAY SHOWN ON LEFT SIDE
- 6 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 7 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 8 - REMOVABLE LEVER CAP HELD IN PLACE BY A PLASTIC LOCKING INSERT IN CAP THREADS

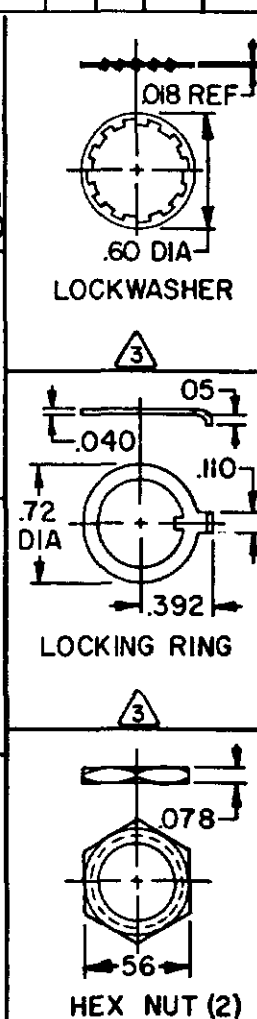

CATALOG LISTING

1TL144 SERIES CHART 1

ISSUE 1

REVISONS	
A	OBS C035217 KPK 25 APR 75
B	REIN C078465 MAM 10 JUN 94
C	CO- 94429 C S L 24 NOV 99
D	0003226 RS 10FEB04

FORMTEK
DRAWN

AM	10 JUN 94	CHECK	KAC	MDM	CHECK	10FEB04	CHECK		RELEASE NO	CO-78465	REPLACES	1T1 144 SERIES
AM	10 JUN 94	CHECK	KAC	MDM	CHECK	10FEB04	CHECK		RELEASE NO	CO-78465	REPLACES	1T1 144 SERIES

CHECK

MCM


CHEC	
------	--

11

2	
1	2

Y	
CK	

94

THIRD ANGLE PROJECTION			
			
#SCALE		FULL	
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED TOLERANCES ARE 2			
DRILL SIZE	TOL. mm/in	DRILL IN	TOL. mm/in
NO PLACES	1/64	X X	0.51/0.00
ONE PLACE	0.015	X X	0.382/0.01
NO PLACES	X X	X X X	0.187/0.00
THREE PLACES ANGLES			
BI METRIC		US CUSTOMARY	
DESIGN UNITS		DESIGN UNITS	
RAB MATERIAL-COMMERICAL STANDARD MICRO SWITCH STANDARDS APPLY		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED	
WEIGHT			

15A-125, 250 OR 277VAC
1/2HP-125VAC; 1HP-250, 277VAC
5A-125VAC "L" CODE L191

10A-125, 250, 277VAC
1/4-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" L192