


CATALOG LISTING
1TL156 SERIES CHART 2
PAGE 1 OF 1
ISSUE 7
REPLACES PR-8719
CHECK
REVISIONS
A CO77942
JAF
28 JUN 94
B CO-94430
JJA
10 NOV 99
FORMTEK
DRAWN
JAF 28 JUN 94
CHECK

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED MFG CODE 91929


SWITCH-TOGGLE

CATALOG LISTING
1TL156 SERIES
CHART 2

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

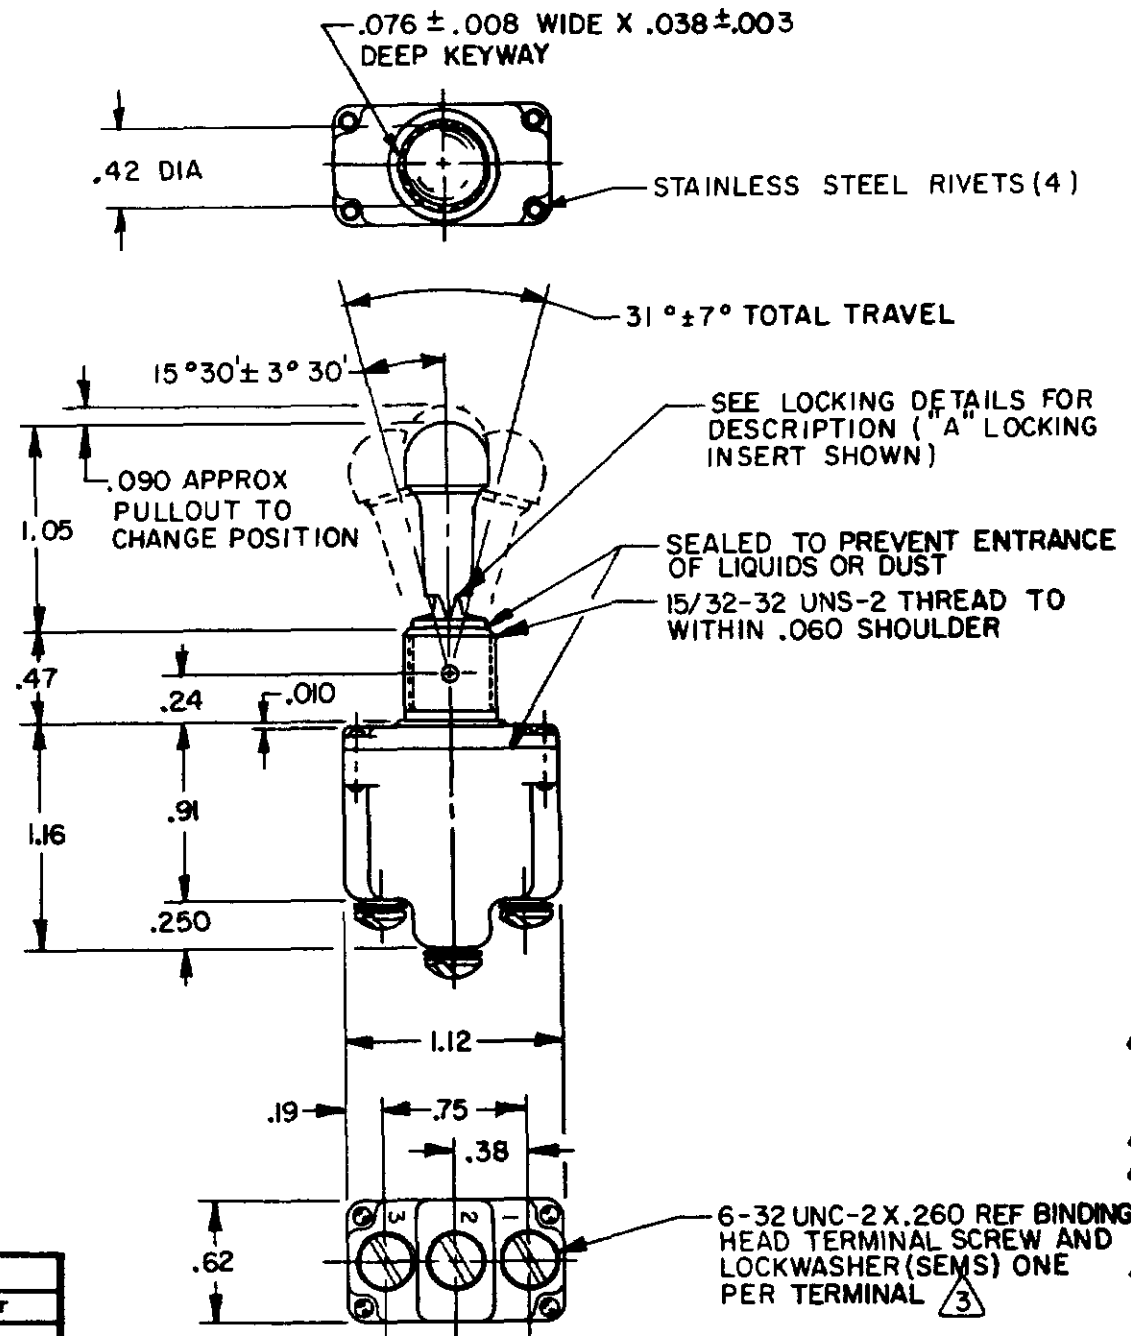

CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)								
		KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	RESISTIVE LOAD DC VOLTS			LAMP LOAD AC VOLTS			IND. LOAD		
					28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
ITL156-1	AB,DE,FG,H,K,L,M,NP	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
ITL156-2	D,F,G	OFF	NONE	ON									
ITL156-3	D,F,G	ON	NONE	ON									
ITL156-21	E,F,K,M	NONE	OFF	ON									
ITL156-31	E,F,K,M	NONE	ON	ON									
ITL156-4	F	MOM OFF	NONE	ON	15	.75	.5	15	6	4	2	10	7
ITL156-5	E,F,K,L,M,N	MOM ON	OFF	ON									
ITL156-6	F	MOM ON	NONE	OFF									
ITL156-7	E,L,N	MOM ON	OFF	MOM ON									
ITL156-8	F	MOM ON	NONE	ON									
ITL156-51	E	NONE	ON	MOM ON									
ITL156-61	E	MOM ON	OFF	NONE									

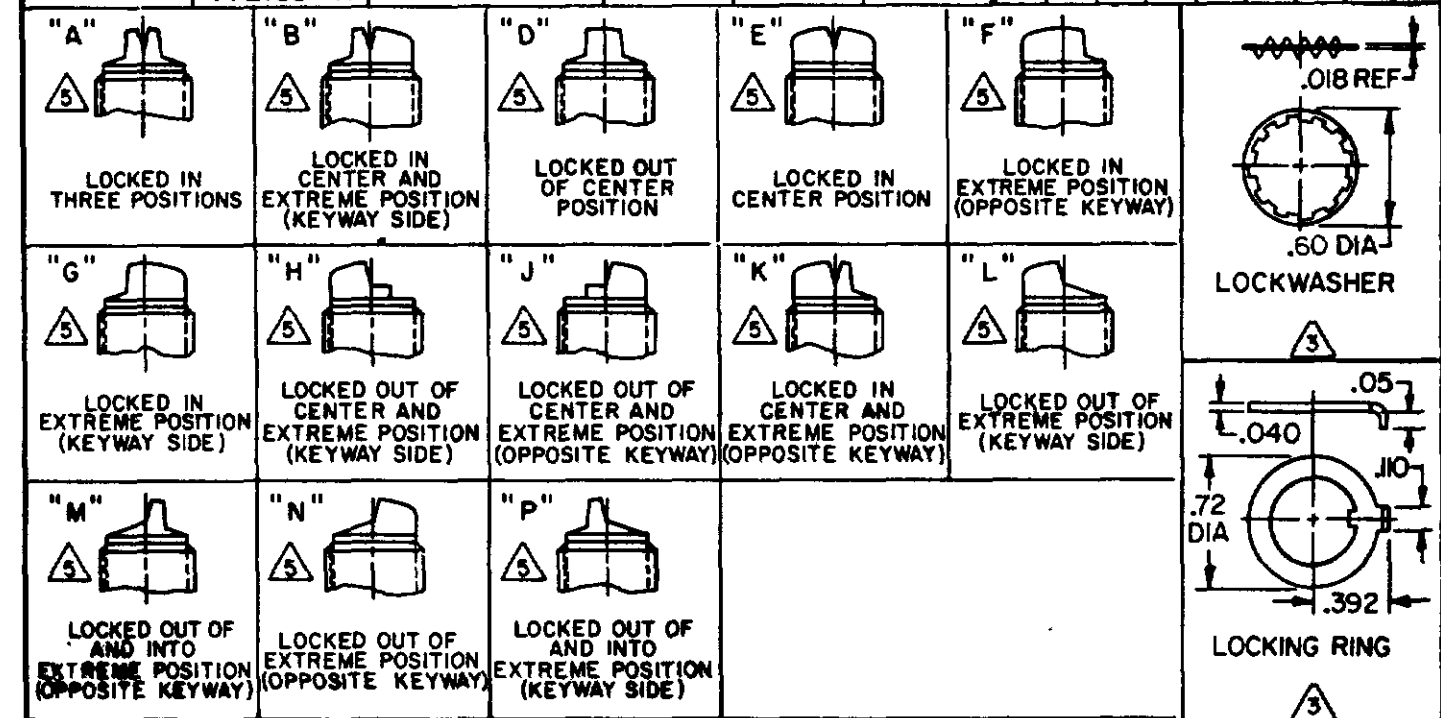

NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH

3 FURNISHED UNASSEMBLED

5 KEYWAY SHOWN ON LEFT SIDE

6 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

7 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL	
DO NOT SCALE PRINT	
UNLESS OTHERWISE NOTED	
DIMENSIONS ARE IN INCHES	
TOLERANCES ARE:	
ONE PLACE (.0)	±.000
TWO PLACE (.00)	±.005
THREE PLACE (.000)	±.0005
WEIGHT .08 LBS APPROX	
L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L"	L192 10A 125, 250, 277 VAC 1/4HP 125 VAC, 1/2HP 250, 277 VAC 3A 125 VAC "L"