
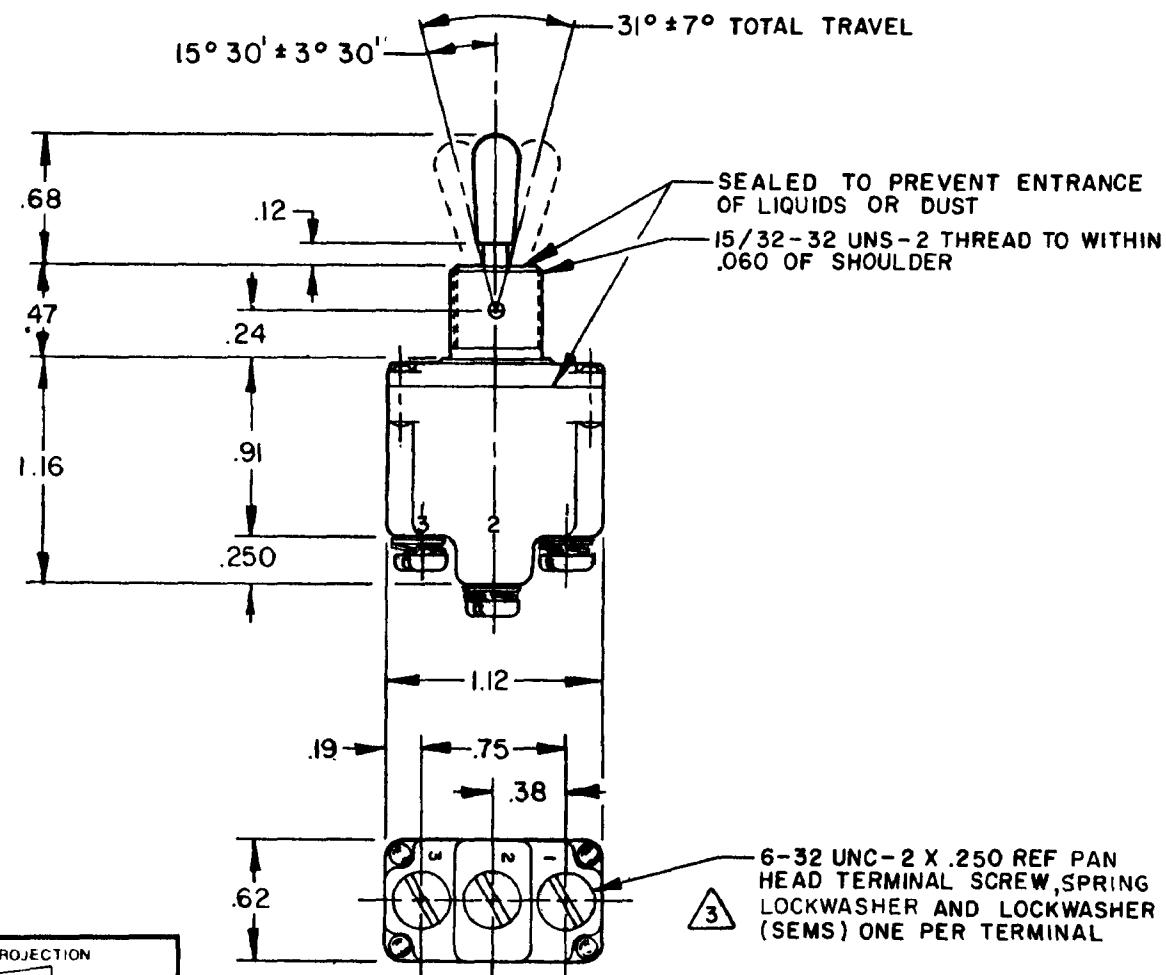


FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

CATALOG LISTING
1 TL176 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

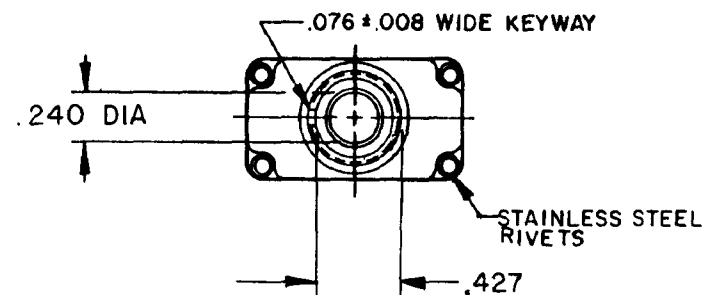

DO NOT SCALE PRINT

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED. TOLERANCES ARE $\pm$

	DIM. mm	TOL mm/in	DIM. in	TOL mm/in
NO PLACES	X	1/04		
ONE PLACE	X,X	0 4/018	X X	0 5/03
TWO PLACES	X,XX	0 15/008	X XX	0 38/015
THREE PLACES			X XXX	0 13/005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY ☒

RAW MATERIAL-COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED




WEIGHT 07 1 RC ADDRESS

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)

	ITL176 -1	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
	ITL176 -2	OFF	NONE	ON									
	ITL176 -3	ON	NONE	ON									
	ITL176 -21	NONE	OFF	ON									
	ITL176 -31	NONE	ON	ON									
	ITL176 -4	MOM OFF	NONE	ON	15	.75	.5	15	6	4	2	10	7
	ITL176 -5	MOM ON	OFF	ON									
	ITL176 -6	MOM ON	NONE	OFF									
	ITL176 -7	MOM ON	OFF	MOM ON									
	ITL176 -8	MOM ON	NONE	ON									
	ITL176 -51	NONE	ON	MOM ON									
	ITL176 -61	MOM ON	OFF	NONE									



- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - POLE, CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- ③ FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA7
- ⑤ APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS