

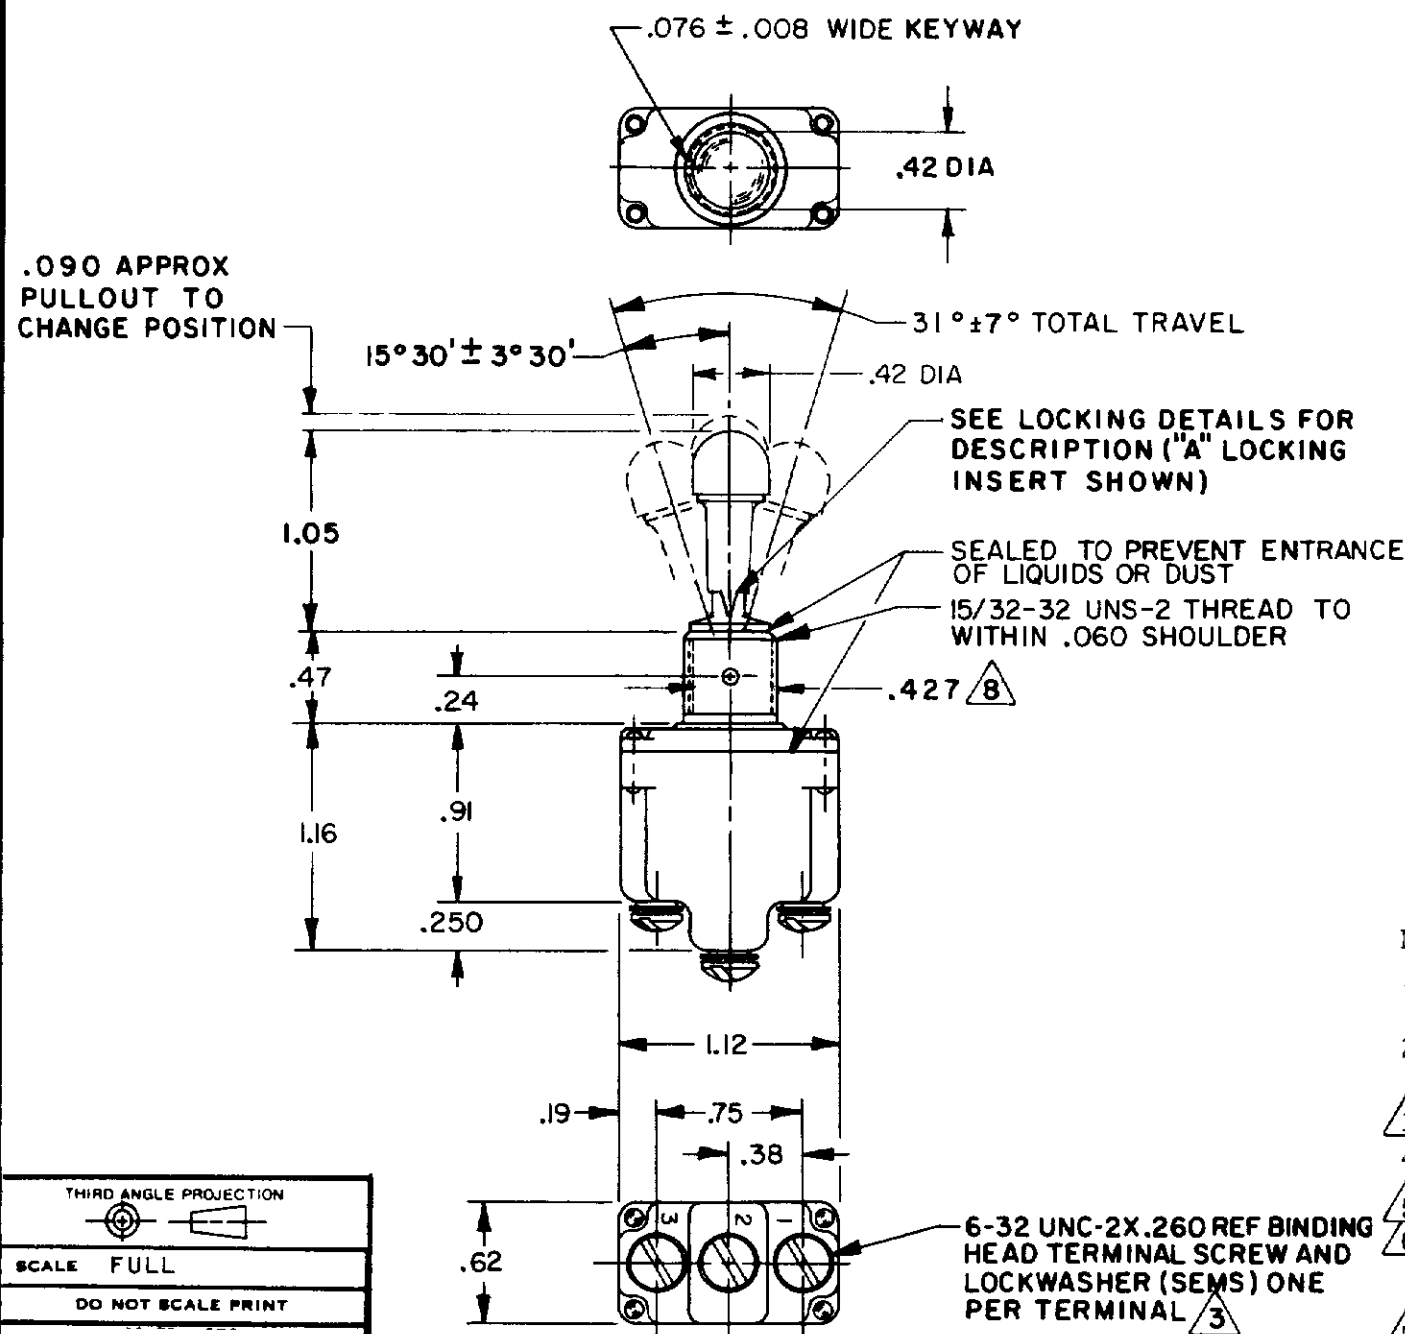
FED MFG CODE 21928

CATALOG LISTING
1TL187 SERIES
CHART 2

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

FD

JAF	28
-----	----





WEIGHT .08 LBS. APPROX


CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)								
		KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISTIVE LOAD DC VOLTS			LAMP LOAD VDC			IND LOAD		
					28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
ITL187-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
ITL187-2	D, F, G	OFF	NONE	ON									
ITL187-3	D, F, G	ON	NONE	ON									
ITL187-21	E, F, K, M	NONE	OFF	ON									
ITL187-31	E, F, K, M	NONE	ON	ON									
(REFER TO L191 FOR UL RATING)													
ITL187-4	F	MOM OFF	NONE	ON	15	.75	.5	15	6	4	2	10	7
ITL187-5	E, F, K, L, M, N	MOM ON	OFF	ON									
ITL187-6	F	MOM ON	NONE	OFF									
ITL187-7	E, L, N	MOM ON	OFF	MOM ON									
ITL187-8	F	MOM ON	NONE	ON									
(REFER TO L192 FOR UL RATING)													
ITL187-51	E	NONE	ON	MOM ON									
ITL187-61	E	MOM ON	OFF	NONE									


"A"

LOCKED IN THREE POSITIONS

"B"

LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)


"D"

LOCKED OUT OF CENTER POSITION


"E"

LOCKED IN CENTER POSITION


"F"

LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)

"G"

LOCKED IN EXTREME POSITION (KEYWAY SIDE)


"H"

LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)

"J"

LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)

"K"

LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)


"L"


LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)

"M"

LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)


"N"

LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)

"P"

LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)




LOCKWASHER
3



LOCKING RING
3

7 8 9	APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS FROM BOTTOM OF KEYWAY TO MAJOR DIA. OF 15/32 THREAD GOLD PLATED CONTACTS
--	---



HEX NUT (2) -