MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
1TL213 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	△5 CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)								
				RESISITIVE LOAD DC VOLTS			AC VOLTS		LAMP LOAD		INDUCTIVE LOAD	
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
1TL213-1	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
1TL213-2	OFF	NONE	ON									
1TL213-3	ON	NONE	ON									
1TL213-21	NONE	OFF	ON									
1TL213-31	NONE	ON	ON									
1TL213-4	MOM OFF	NONE	ON	15	.75	.5	15	6	4	2	10	7
1TL213-5	MOM ON	OFF	ON									
1TL213-6	MOM ON	NONE	OFF									
1TL213-7	MOM ON	OFF	MOM ON									
1TL213-8	MOM ON	NONE	ON									
1TL213-51	NONE	ON	MOM ON									
1TL213-61	MOM ON	OFF	NONE									

(REFER TO L191 FOR UL RATING)

(REFER TO L192 FOR UL RATING)

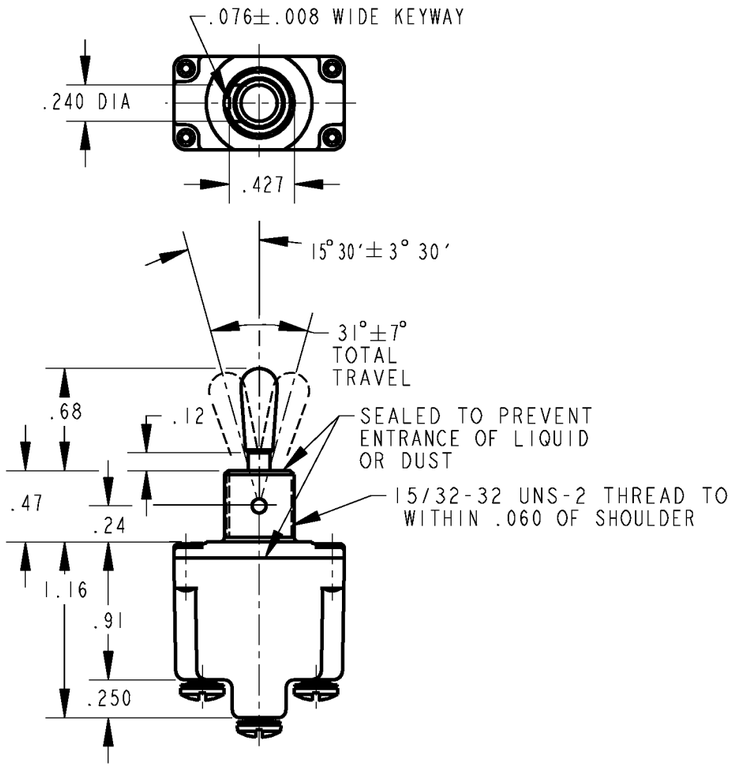

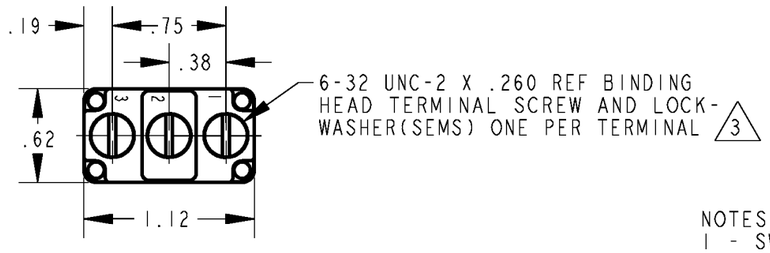

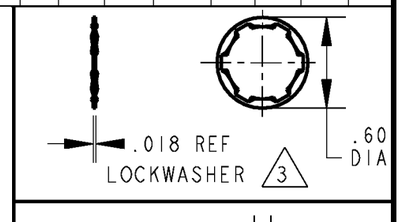

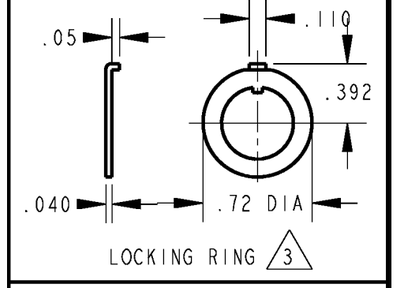

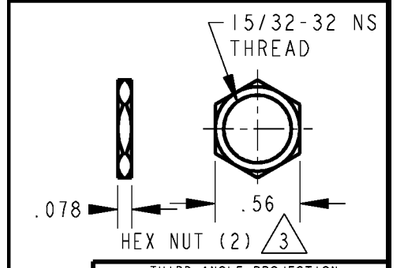

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
△3 FURNISHED UNASSEMBLED
4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
△5 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

15A-125, 250 OR 277 VAC
1/2 HP-125VAC: 1 HP-250, 277 VAC
5A-125VAC "L" CODE L191

10A-125, 250, 277 VAC
1/4 HP-125VAC: 1/2 HP-250, 277 VAC
3A-125VAC "L" CODE L192

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .07 LBS APPROX

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 1TL213 SERIES CHART 1
PAGE 1 OF 1
ISSUE 3
REPLACES
RELEASE NO. PR-17542

REVISIONS
A C094430 TSM 16NOV99

	DRAWN	CHECK	CHECK	CHECK	CHECK
PTC/CAD 2D	TSM 16NOV99		16NOV99	JAF	