

REVISIONS	
A	0077942
JAF 28 JUN 94	
B	0094430
JAF 10 NOV 99	
C	202334
CSL 8 FEB 01	
D	0008183
KSR 27 SEP 04	
E	0008999
DVM 28 OCT 04	


RELEASE NO PR-11058
CHECK
AK
28 OCT 04
27 SEP 04
28 JUN 94

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929




SWITCH-TOGGLE

CATALOG LISTING
1TL373 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

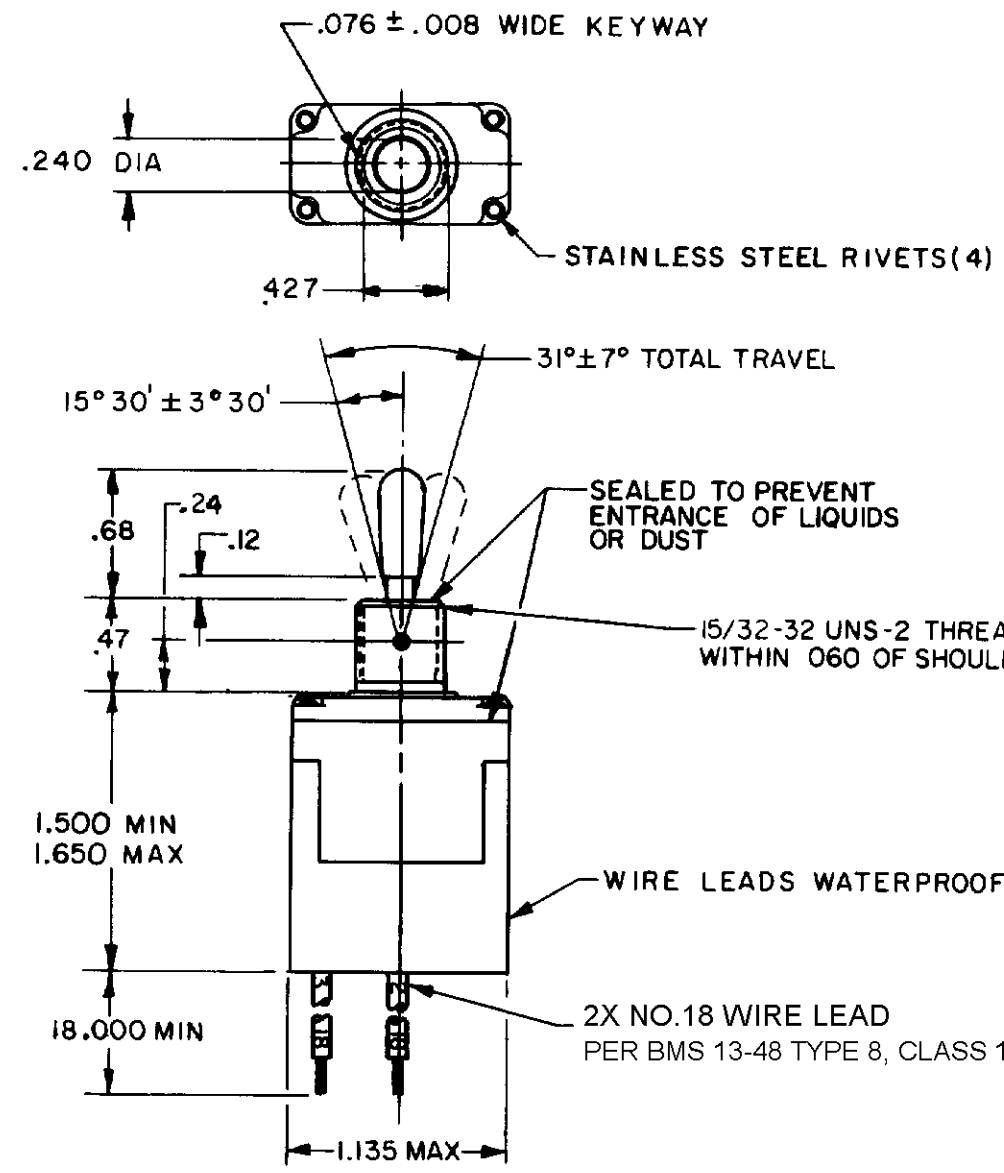

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)								
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISTIVE LOAD DC VOLTS			LAMP LOAD AC VOLTS		INDUCTIVE LOAD			
				28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
ITL373-1	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
ITL373-2	OFF	NONE	ON									
ITL373-3	ON	NONE	ON									
ITL373-2I	NONE	OFF	ON									
ITL373-3I	NONE	ON	ON									
ITL373-4	MOM OFF	NONE	ON	15	.75	.5	15	6	4	2	10	7
ITL373-5	MOM ON	OFF	ON									
ITL373-6	MOM ON	NONE	OFF									
ITL373-7	MOM ON	OFF	MOM ON									
ITL373-8	MOM ON	NONE	ON									
ITL373-5I	NONE	ON	MOM ON									
ITL373-6I	MOM ON	OFF	NONE	(REFER TO L192 FOR UL RATING)								

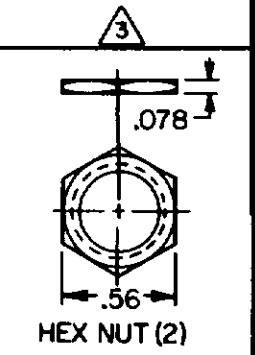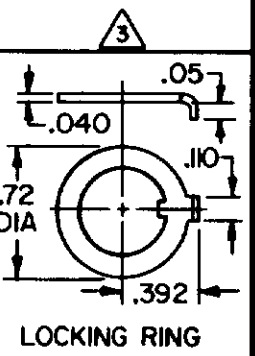

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - LEAD WIRES ARE MARKED WITH BLACK INK EACH 3.000 MAX "2-18" AND "3-18" PER MIL-W-5088
 - 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 6 - BASIC SWITCH QUALIFIED UNDER MIL-S-3950 BEFORE MODIFICATION

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM	TOL	DIM	TOL
mm	mm/in	in	mm/in
1/16	1/64	0.001	0.001
1/32	0.001	0.002	0.002
1/64	0.002	0.005	0.005
1/32	0.005	0.010	0.010
1/16	0.010	0.015	0.015
1/8	0.015	0.020	0.020
3/16	0.020	0.030	0.030
1/4	0.030	0.040	0.040
5/16	0.040	0.050	0.050
3/8	0.050	0.060	0.060
7/16	0.060	0.070	0.070
1/2	0.070	0.080	0.080
5/8	0.080	0.090	0.090
3/4	0.090	0.100	0.100
7/8	0.100	0.110	0.110
1	0.110	0.120	0.120

DESIGN UNITS: SI METRIC ☐ US CUSTOMARY ☒

WEIGHT .10 LBS APPROX

L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L"	L192 10A 125, 250, 277 VAC 1/4HP 125 VAC, 1/2HP 250, 277 VAC 3A 125 VAC "L"
---	--