


MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
1TL51 SERIES
CHART 1




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

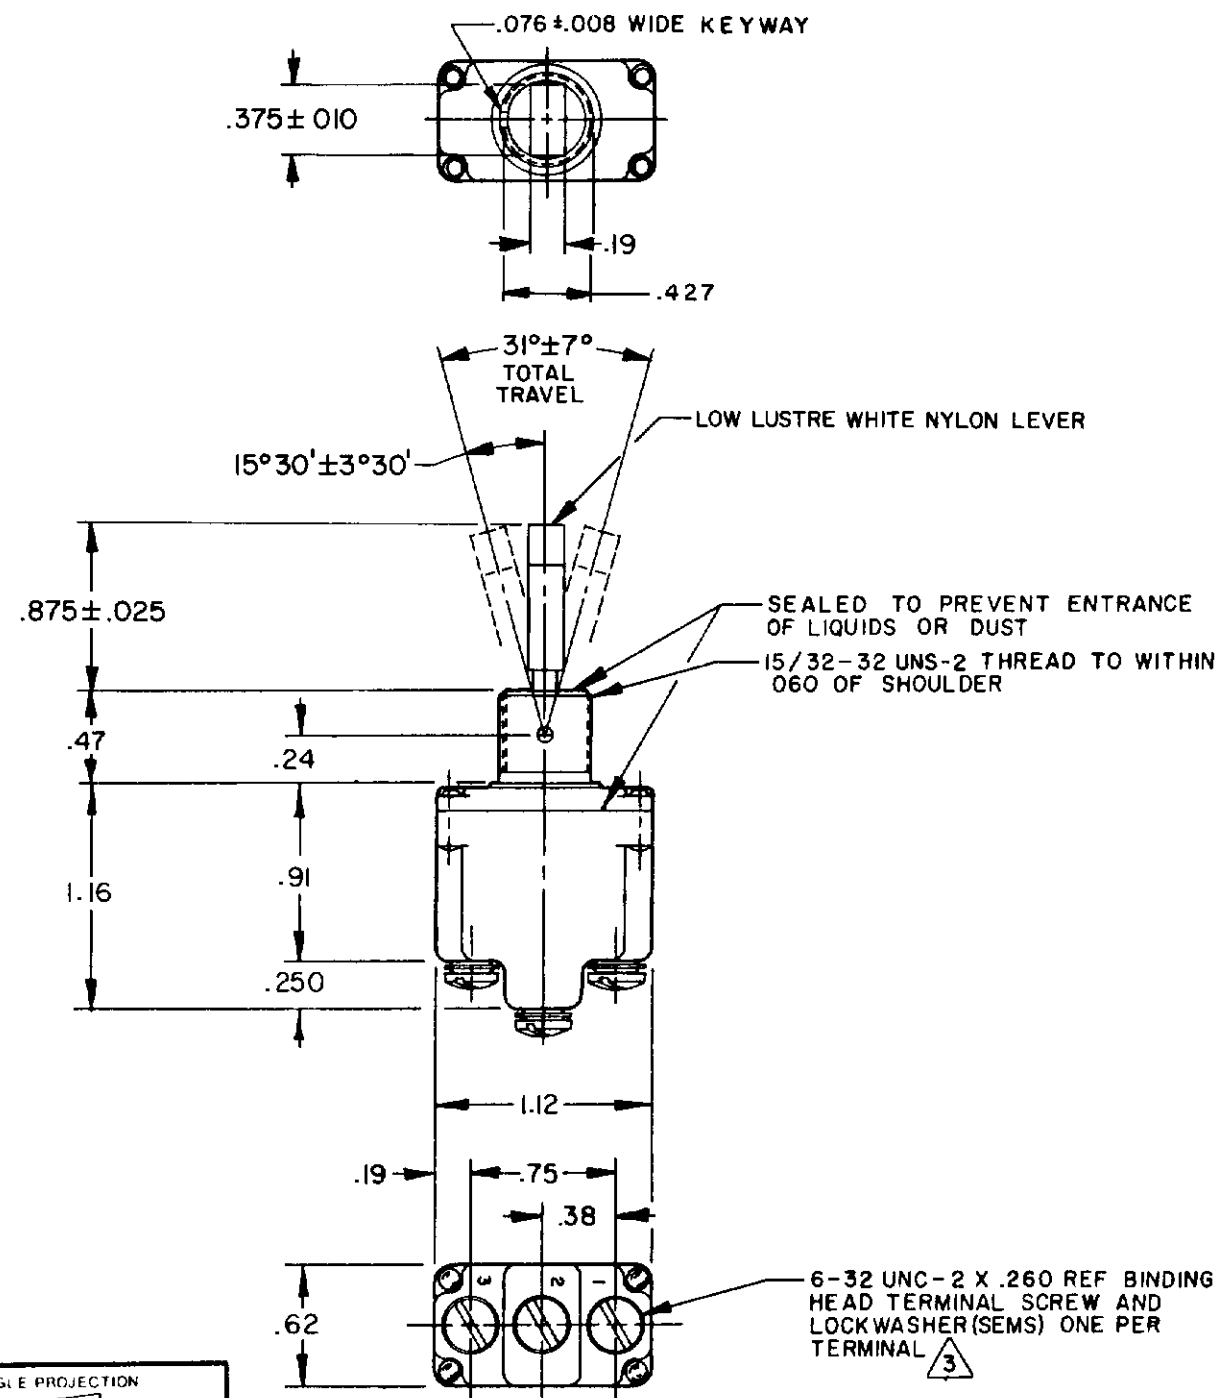

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)							
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD	
				DC VOLTS	AC VOLTS	28 VDC	125 VAC	28 VDC	125 VAC	28 VDC	125 VAC
ITL51-1	ON	OFF	ON	20	75	5	15	6	5	3	15
ITL51-2	OFF	NONE	ON								
ITL51-3	ON	NONE	ON								
ITL51-21	NONE	OFF	ON								
ITL51-31	NONE	ON	ON								
ITL51-4	MOM OFF	NONE	ON	15	75	.5	15	6	4	2	10
ITL51-5	MOM ON	OFF	ON								
ITL51-6	MOM ON	NONE	OFF								
ITL51-7	MOM ON	OFF	MOM ON								
ITL51-8	MOM ON	NONE	ON								
ITL51-41	NONE	MOM OFF	ON								
ITL51-51	NONE	ON	MOM ON								
ITL51-61	MOM ON	OFF	NONE								

(REFER TO L191 FOR UL RATING)

(REFER TO L192 FOR UL RATING)



NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA7
- 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED TOLERANCES ARE 2			
DIM	TOL	DIM	TOL
mm	mm/in	in	mm/in
NO PLACES	1/64	0.001	0.001
ONE PLACE	0.001	0.001	0.001
TWO PLACES	0.001	0.001	0.001
THREE PLACES	0.001	0.001	0.001
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS		DESIGN UNITS	
RAW MATERIAL - COMMERCIAL STANDARD			
MICRO SWITCH STANDARDS APPLY			
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			
WEIGHT 07 LBS APPROX			

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"