

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

CATALOG LISTING
1TL84 SERIES
CHART 1

AVAILABLE
LOCKING
COMBINATIONS
FOR CONFIGURATION
SEE LETTERED DETAILS


CATALOG
LISTING
A

CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)





MILITARY RATING (AMPS)

RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			AC VOLTS					
28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.


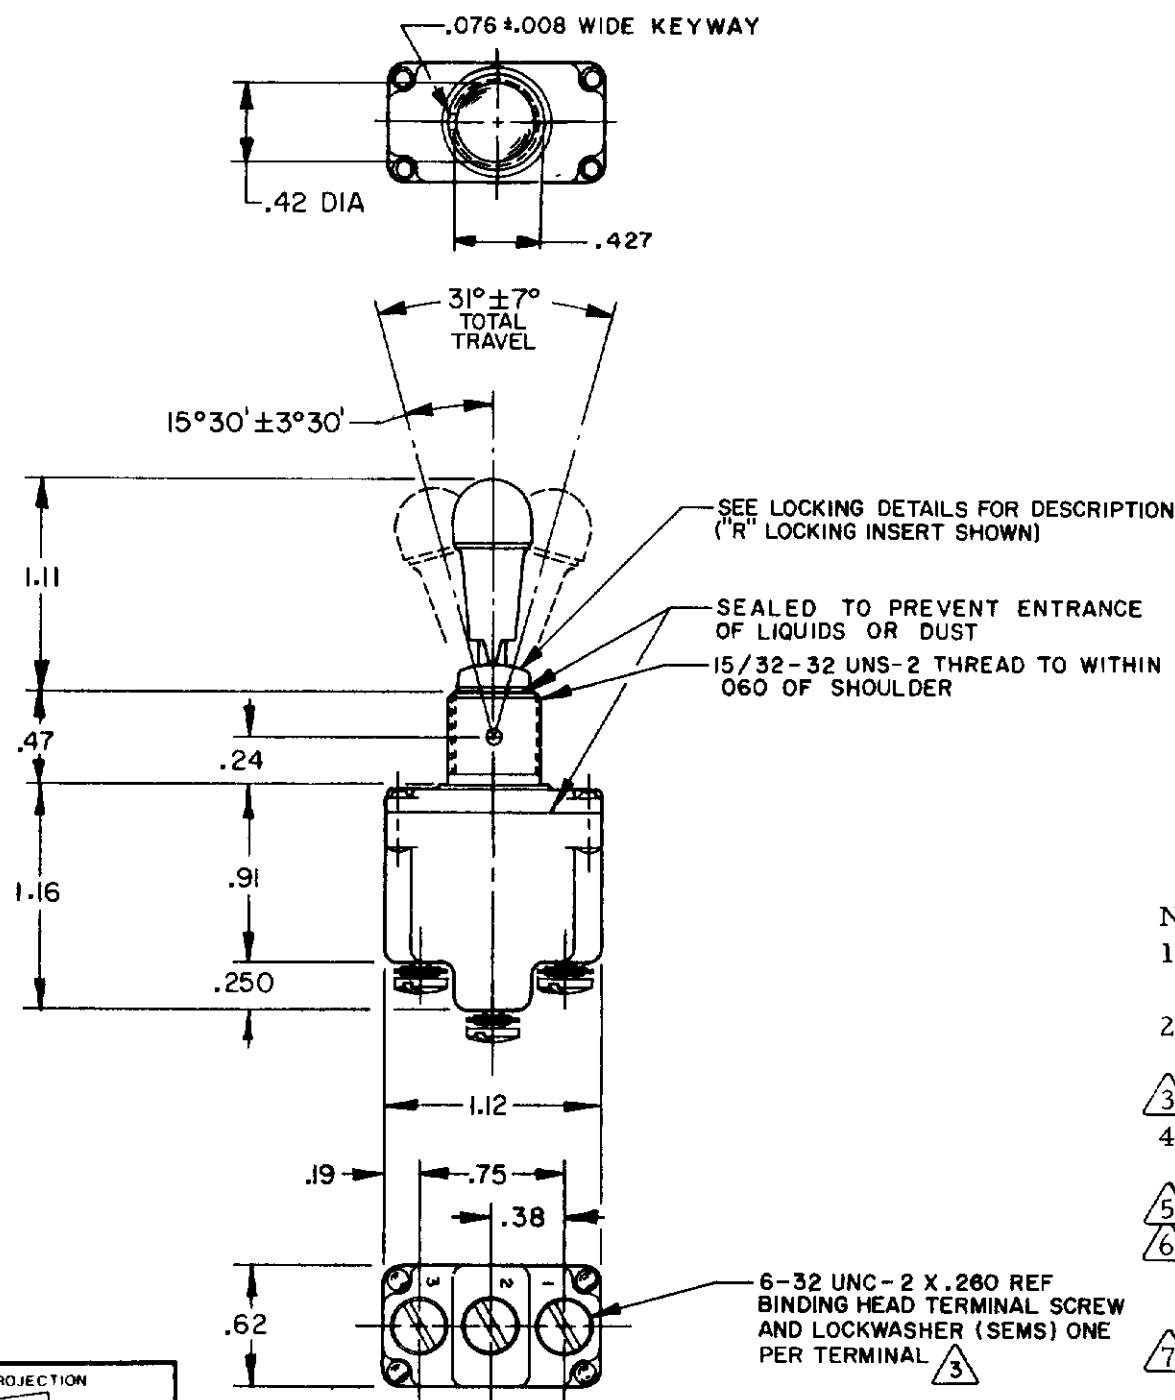


R	ITL84-1	ON	OFF	ON
R	ITL84-2	OFF	NONE	ON
R	ITL84-3	ON	NONE	ON
R	ITL84-2I	NONE	OFF	ON
R	ITL84-3I	NONE	ON	ON
S	ITL84-4	MOM OFF	NONE	ON
R	ITL84-5	MOM ON	OFF	ON
S	ITL84-6	MOM ON	NONE	OFF
R	ITL84-7	MOM ON	OFF	MOM ON
S	ITL84-8	MOM ON	NONE	ON
T	ITL84-5I	NONE	ON	MOM ON
S	ITL84-6I	MOM ON	OFF	NONE
S	ITL84-8I	MOM ON	ON	NONE




NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- ③ FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
- ⑤ KEYWAY SHOWN ON LEFT SIDE
- ⑥ SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- ⑦ APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS



THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

TO: FRANCES

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED TOLERANCES ARE $\pm$

	DIM mm	TOL mm/in	DIM in	TOL mm/in
NO PLACES	X	1/64		
ONE PLACE	X, X	0.4/0.16	X, X	0.5/0.25
TWO PLACES	X, XX	0.15/0.08	X, XX	0.34/0.11
THREE PLACES			X, XXX	0.13/0.05
ANGLES				

BI-METRIC

BI METRIC

US CUSTOMAR

RAW MATERIAL—COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT .08 LBS APPROX

15A-125, 250 OR 277VAC
1/2HP-125VAC; 1HP-250, 277VAC
5A-125VAC "L" CODE L191

10A-125, 250 OR 277VAC
1/4HP-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" CODE L192

1TL84 SERIES CHART 1

M

3
SUE

REVISIONS

A	CO-94431
CSL 24 NOV 99	
B	202798
CSL 9 APR 01	

--	--

11/11/2016

1

11/11/2016

[illegible][illegible]

11

R |

AS
RA[illegible]