

SWITCH - TOGGLE

1TL889 SERIES CHART 1

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

1TL889 SERIES CHART 1

ISSUE	M	CATALOG LISTING
4		PAGE

REVISIONS	
A	CO-95550
S A V	
18 NOV 99	
B	CO-94432
T S M	
23 NOV 99	

[illegible]

PTC / CAD 2D

REPLACES

RELEASE NO. PR-23679

CHECK


CHECK

JAF

CHECK

66 / 99





Y	I
---	---

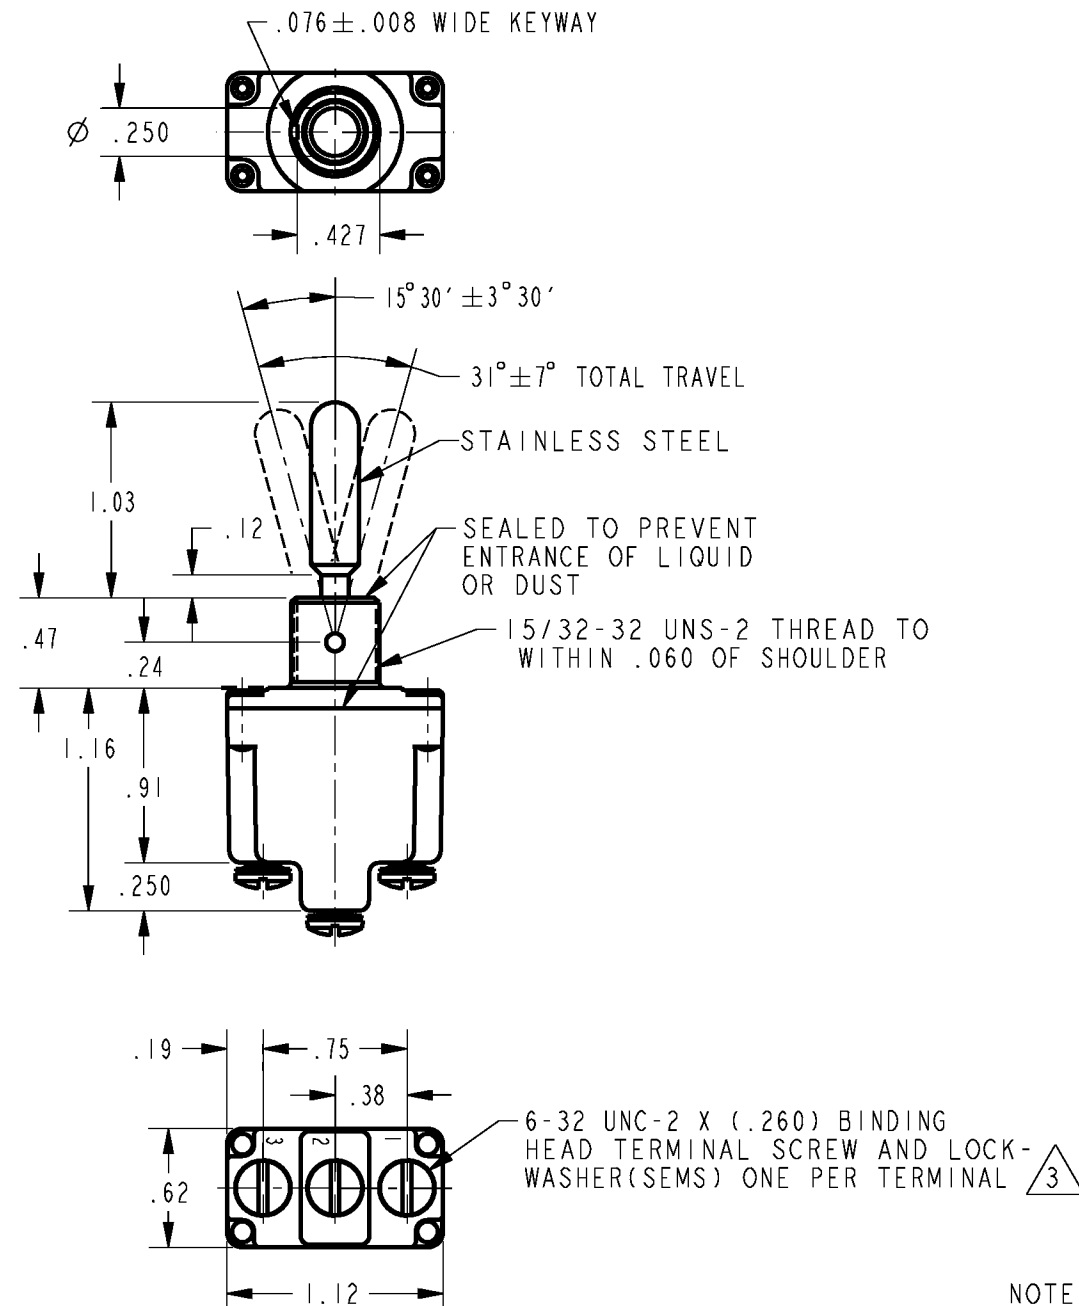

NOTES

- NOTE
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
 - 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 6 - GOLD PLATED CONTACTS

CATALOG LISTING	<div><div>5</div><div>CIRCUIT MADE WITH TOGGLE LEVER IN</div></div>			MILITARY RATING (AMPS)								
	KEYWAY SIDE (1 - 2)	CENTER (1 - 2)	OPPOSITE KEYWAY (2 - 3)	RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD		
				DC VOLTS		AC VOLTS						
				28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
ITL889-1	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
ITL889-2	OFF	NONE	ON									
ITL889-3	ON	NONE	ON									
ITL889-21	NONE	OFF	ON	(REFER TO LI91 FOR UL RATING)								
ITL889-31	NONE	ON	ON									
ITL889-4	MOM OFF	NONE	ON	15	.75	5	15	6	4	2	10	7
ITL889-5	MOM ON	OFF	ON									
ITL889-6	MOM ON	NONE	OFF									
ITL889-7	MOM ON	OFF	MOM ON									
ITL889-8	MOM ON	NONE	ON									
ITL889-51	NONE	ON	MOM ON									
ITL889-61	MOM ON	OFF	NONE	(REFER TO LI92 FOR UL RATING)								

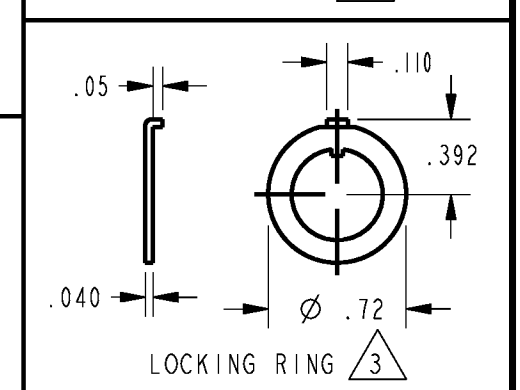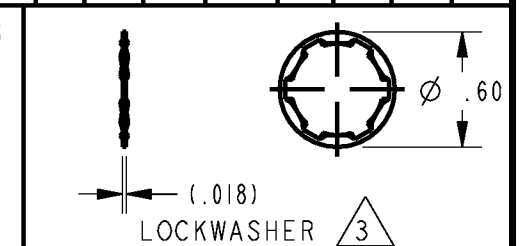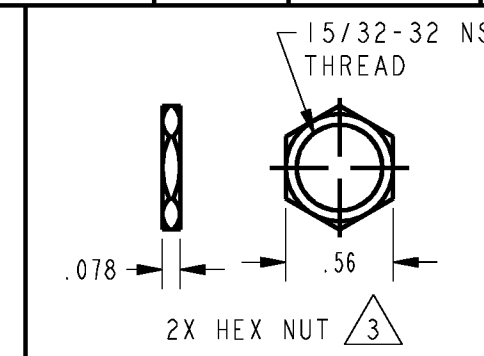

SCALE FULL



DO NOT SCALE PRINT


UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015

THREE PLACE (.000) $\pm .005$
ANGLES \pm

WEIGHT .07 LBS APPROX

15A 125, 250 OR 277 VAC 
1/2 HP-125 VAC: 1 HP 250, 277 VAC
5A 125 VAC "L" CODE L191 

10A 125, 250, 277 VAC 
1/4 HP 125VAC: 1/2 HP 250, 277 VAC
3A 125 VAC "L" CODE L192 