
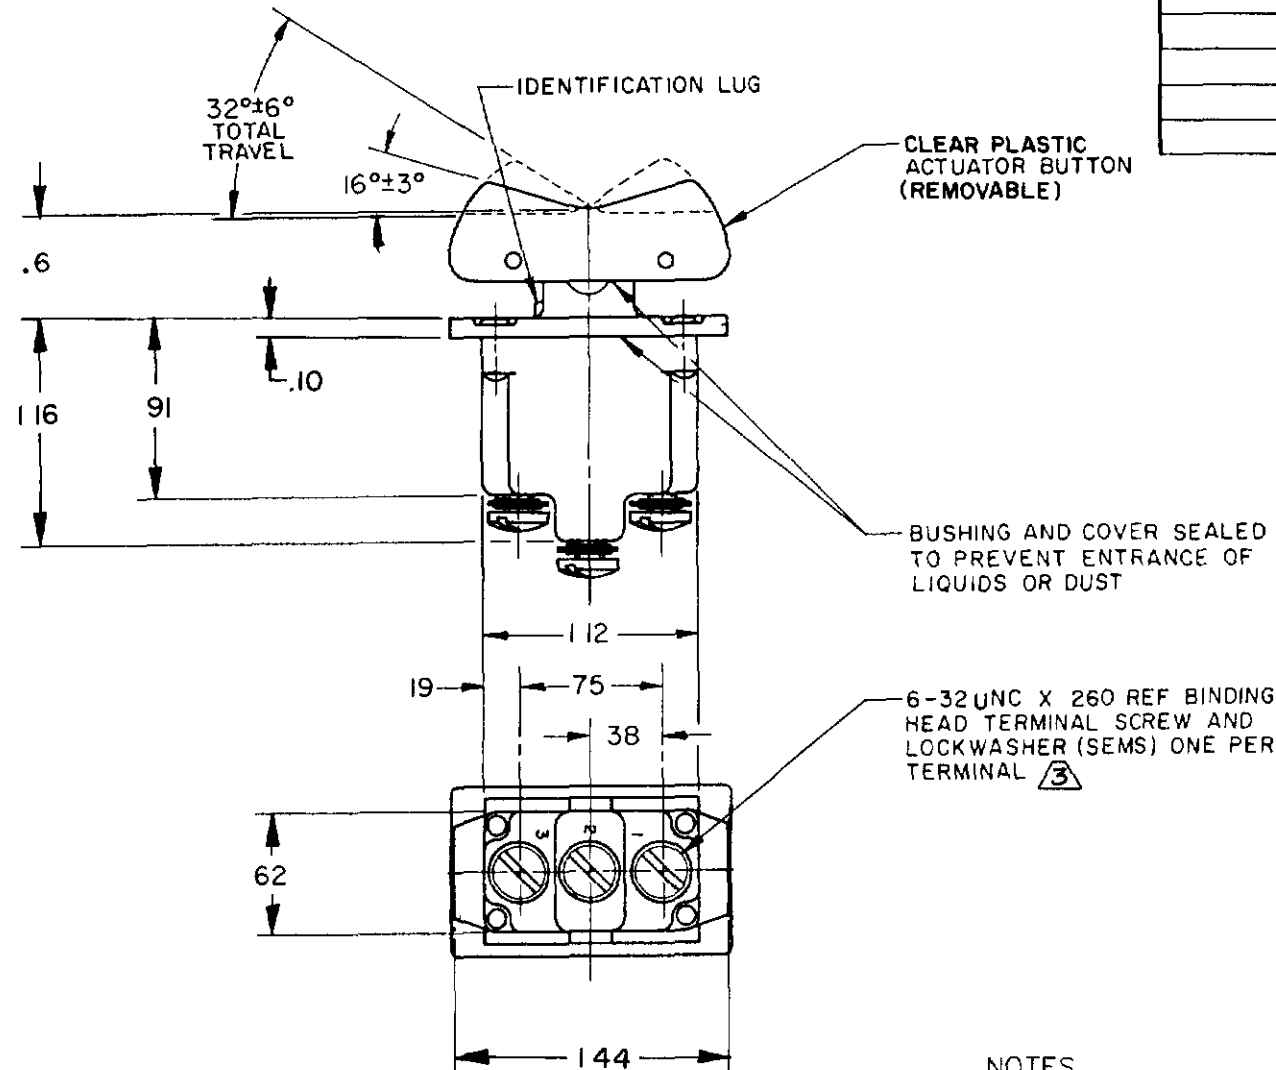



**MICRO SWITCH**  
FREEPORT ILLINOIS U.S.A.  
A DIVISION OF HONEYWELL  
FED MFG CODE 91929**SWITCH - TOGGLE**  
**ABOVE PANEL MOUNT**CATALOG LISTING  
**1TP65 SERIES**  
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

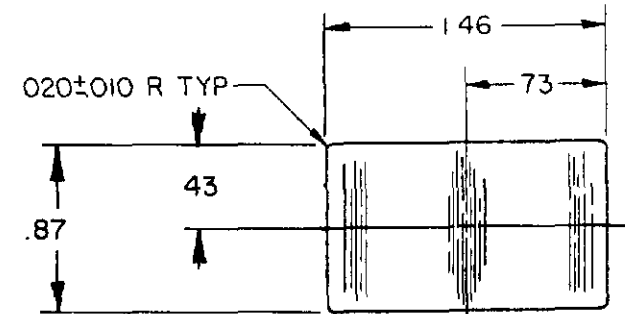

- NOTES
- 1 - MICRO SWITCH CAT LISTING MARKED ON SIDE OF SWITCH
  - 2 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
  - 3 - SCREWS FURNISHED UNASSEMBLED

| CATALOG LISTING | CIRCUIT WITH BUTTON IN |              |                         |                                                                                                                                                                                          |
|-----------------|------------------------|--------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | LUG SIDE (1-2)         | CENTER (1-2) | OPPOSITE LUG SIDE (2-3) |                                                                                                                                                                                          |
| ITP65-1         | ON                     | OFF          | ON                      | L191 15A 125, <u>250</u> , 277 VAC<br>1/2HP 125 VAC<br>1HP <u>250</u> , 277 VAC<br>5A 125 VAC "L"     |
| ITP65-2         | OFF                    | NONE         | ON                      |                                                                                                                                                                                          |
| ITP65-3         | ON                     | NONE         | ON                      |                                                                                                                                                                                          |
| ITP65-2I        | NONE                   | OFF          | ON                      |                                                                                                                                                                                          |
| ITP65-3I        | NONE                   | ON           | ON                      |                                                                                                                                                                                          |
| ITP65-4         | MOM OFF                | NONE         | ON                      | L192 10A 125, <u>250</u> , 277 VAC<br>1/4HP 125 VAC,<br>1/2HP <u>250</u> , 277 VAC<br>3A 125 VAC "L"  |
| ITP65-5         | MOM ON                 | OFF          | ON                      |                                                                                                                                                                                          |
| ITP65-6         | MOM ON                 | NONE         | OFF                     |                                                                                                                                                                                          |
| ITP65-7         | MOM ON                 | OFF          | MOM ON                  |                                                                                                                                                                                          |
| ITP65-8         | MOM ON                 | NONE         | ON                      |                                                                                                                                                                                          |
| ITP65-5I        | NONE                   | ON           | MOM ON                  |                                                                                                                                                                                          |
| ITP65-6I        | MOM ON                 | OFF          | NONE                    |                                                                                                                                                                                          |



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES  
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

|              | DIM   | TOL    | DIM   | TOL    |
|--------------|-------|--------|-------|--------|
|              | mm    | mm/in  | in    | mm/in  |
| NO PLACES    |       | 1/64   |       |        |
| ONE PLACE    | X     | 0.015  | X     | 0.003  |
| TWO PLACES   | X X   | 0.0005 | X X   | 0.0005 |
| THREE PLACES | X X X | 0.0001 | X X X | 0.0001 |

DESIGN UNITS ☐ S. METRIC ☒ U.S. CUSTOMARY

RAW MATERIAL - COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE

PROTECTIVE COATINGS ARE APPLIED

WEIGHT 09 LB EST