


MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED MFG CODE 91929

**SWITCH-TOGGLE
FLUSH KEY**

CATALOG LISTING
1TP66 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

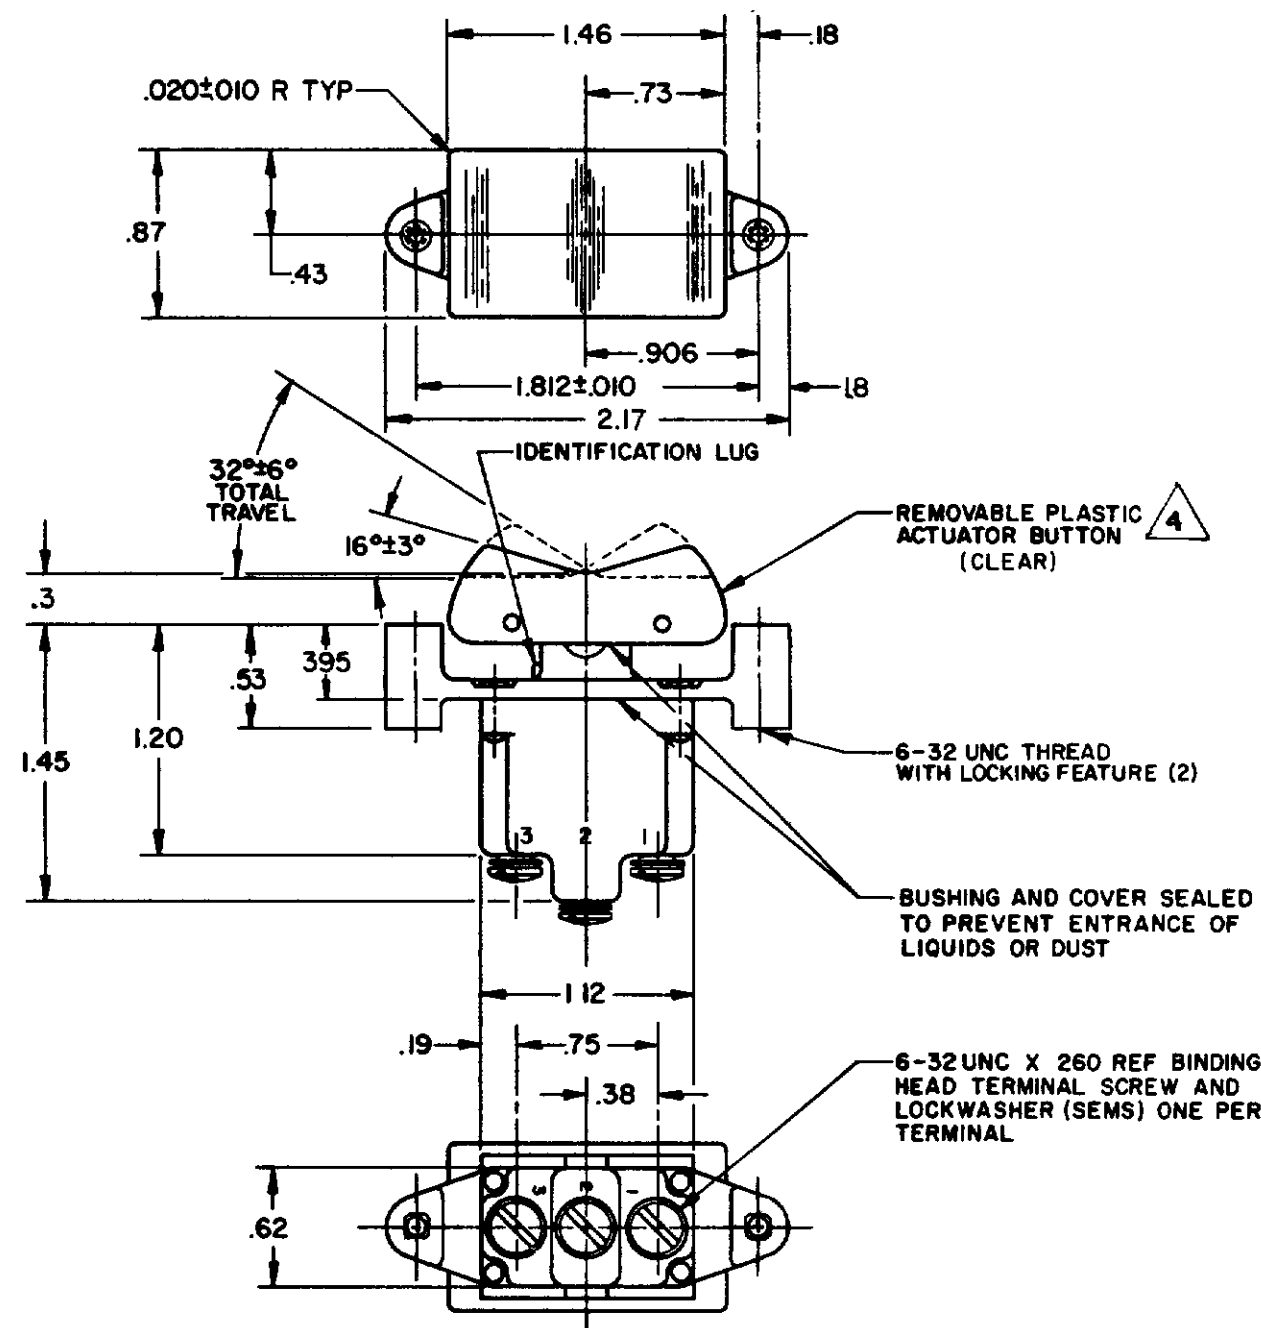

CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON			ELECTRICAL DATA
	LUG SIDE (1-2)	CENTER (1-2)	OPPOSITE LUG (2-3)	
ITP66-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"
ITP66-2	OFF	NONE	ON	
ITP66-3	ON	NONE	ON	
ITP66-21	NONE	OFF	ON	
ITP66-31	NONE	ON	ON	
ITP 66-5	MOM ON	OFF	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"
ITP66-6	MOM ON	NONE	OFF	
ITP66-7	MOM ON	OFF	MOM ON	
ITP66-8	MOM ON	NONE	ON	
ITP66-51	NONE	ON	MOM ON	
ITP 66-61	MOM ON	OFF	NONE	

NOTES

- 1 - MICRO SWITCH CAT LISTING MARKED ON SIDE OF SWITCH
- 2 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
- 3 - FOR TERMINAL COVER SEE MICRO SWITCH CAT LISTING 5PA7

4 FURNISHED UNASSEMBLED



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED TOLERANCES ARE:

	DM	TOL	DM	TOL
	mm	mm/in	in	mm/in
NO PLACES	X	1/64	X	0.001
ONE PLACE	X, X	0.001	X, X	0.001
TWO PLACES	X, XX	0.0005	X, XX	0.0005
THREE PLACES	X, XXX	0.0001	X, XXX	0.0001
ANGLES				

DESIGN UNITS ☐ METRIC ☒ US CUSTOMARY

RAW MATERIAL-COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE

PROTECTIVE COATINGS ARE APPLIED

WEIGHT .10 LB EST