

IXE40I-T

M

DRAWING
 NUMBER

3

3

ISSUE

REPLACES

RELEASE NO. PR-11718

CHECK

REVISIONS

A	PR-11718
8	WJM DEC 82
B	CO 57328-A
17	WJM APR 85

CHECK

8 DEC 82

CHECK

8 DEC 82


CHECK

8 DEC 82

CHECK



FO-52848-A

DRAWN

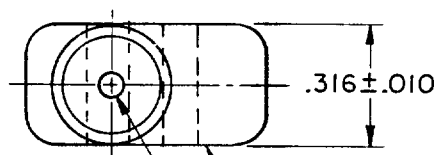

CORROSION RESISTANT TREATED METAL ENCLOSURE

CORROSION RESISTANT STEEL PLUNGER

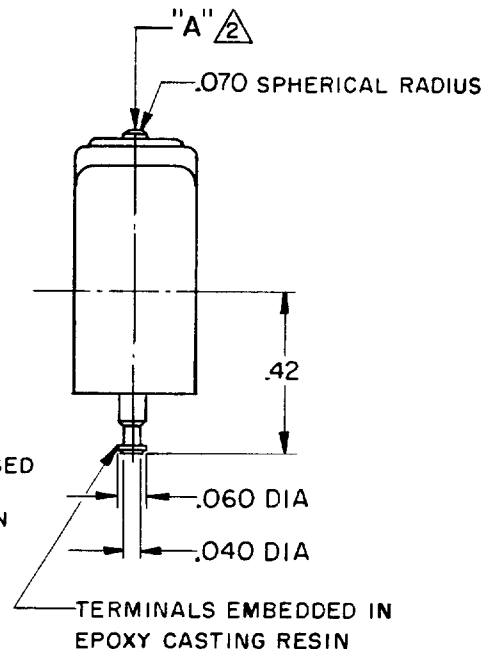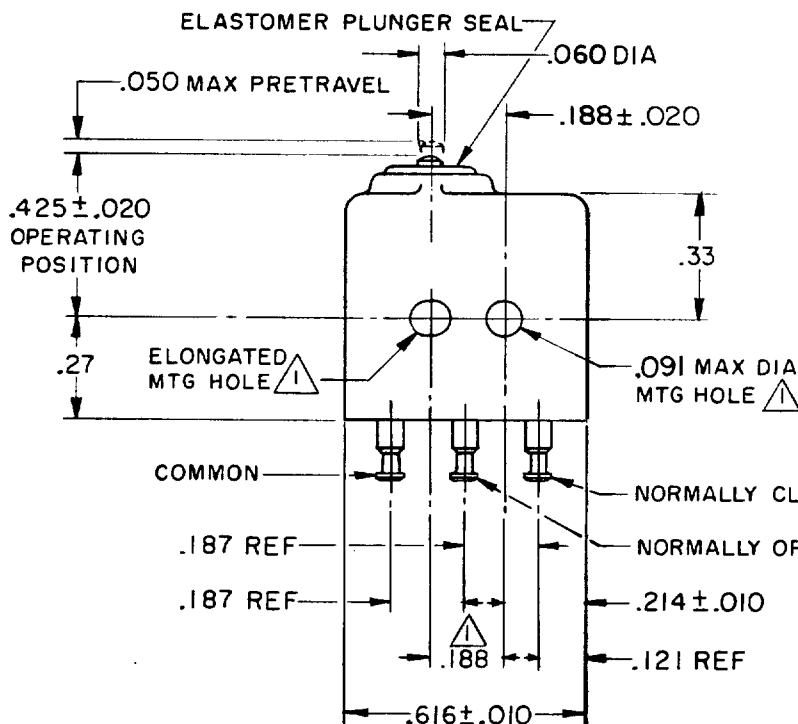


NOTES

- 1 MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .188 ± .002 CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 5-17 OZ
 RELEASE FORCE ----- 3 OZ MIN
 PRETRAVEL ----- .004 MIN
 DIFFERENTIAL TRAVEL ----- .005 MAX
 OVERTRAVEL ----- .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

28 VOLTS DC RATING
 INDUCTIVE --- SEA LEVEL --- 0.5 AMP
 RESISTIVE --- SEA LEVEL --- 1.00 AMP

SCALE 2:1

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	
ONE PLACE	X, X	0.4/015	X, X
TWO PLACES	X, XX	0.15/.006	X, XX
THREE PLACES			X, XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .16 OZ MAX