
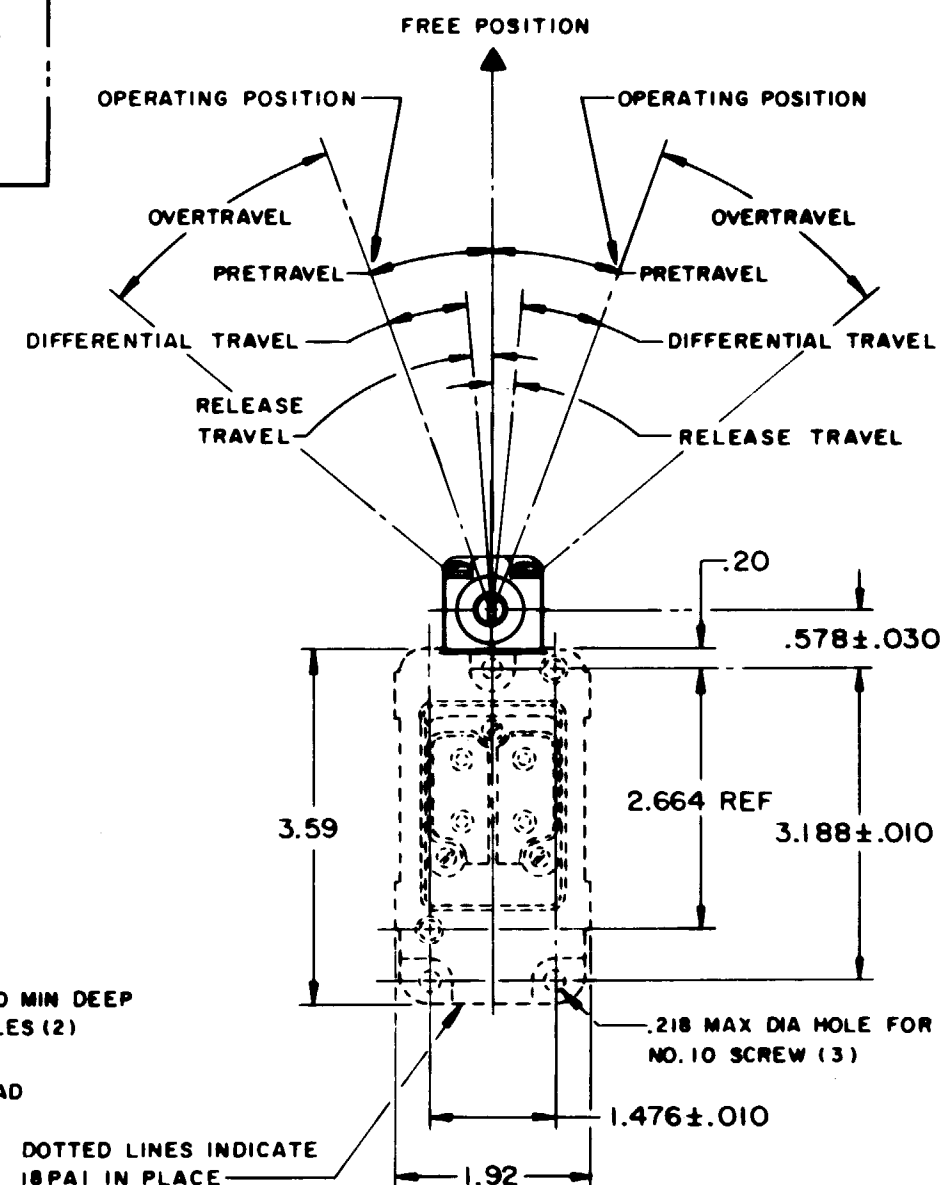
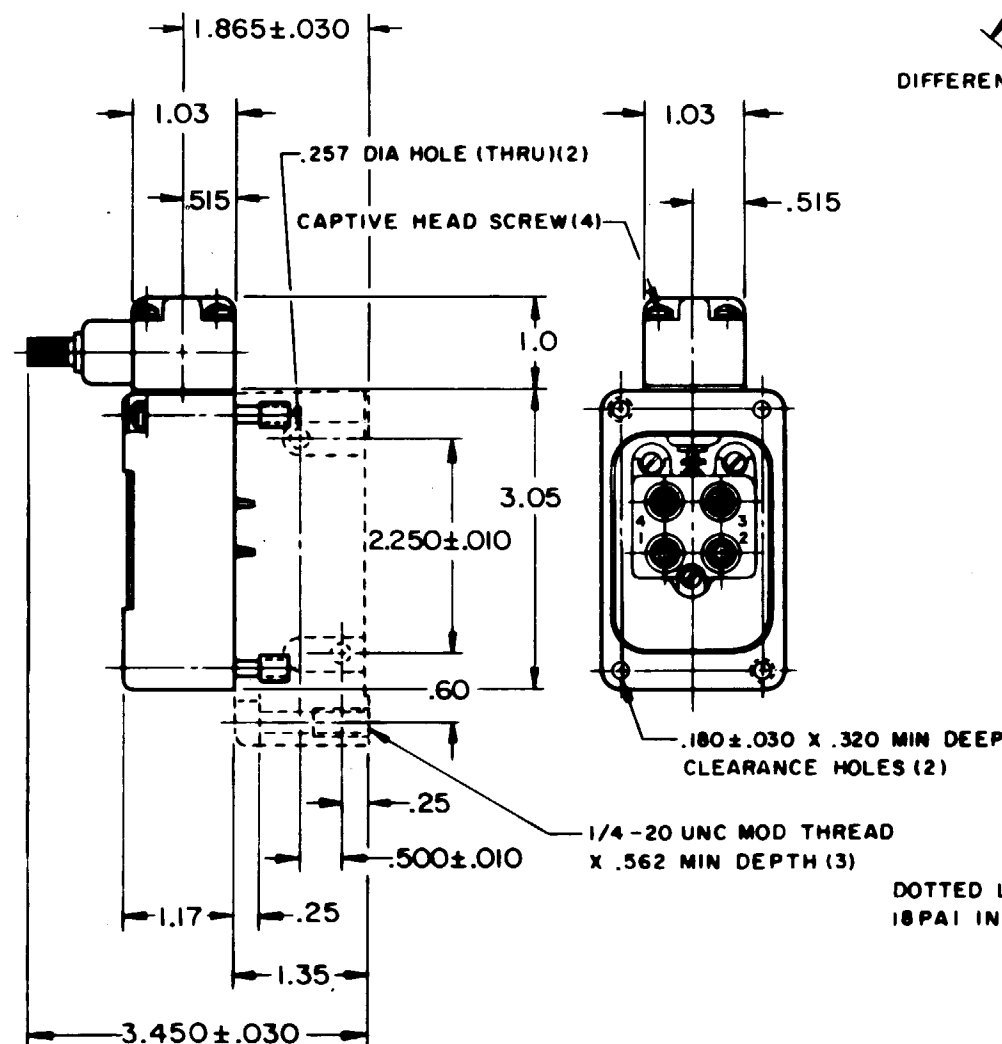
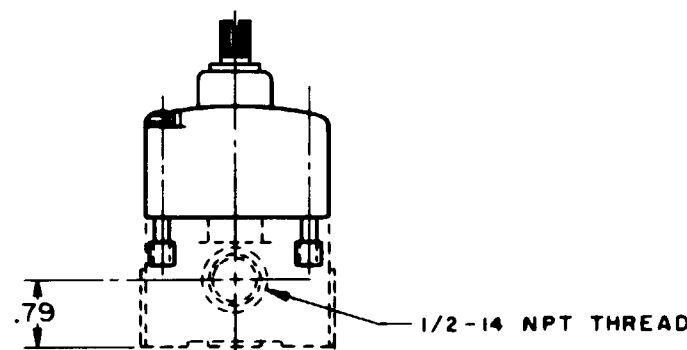
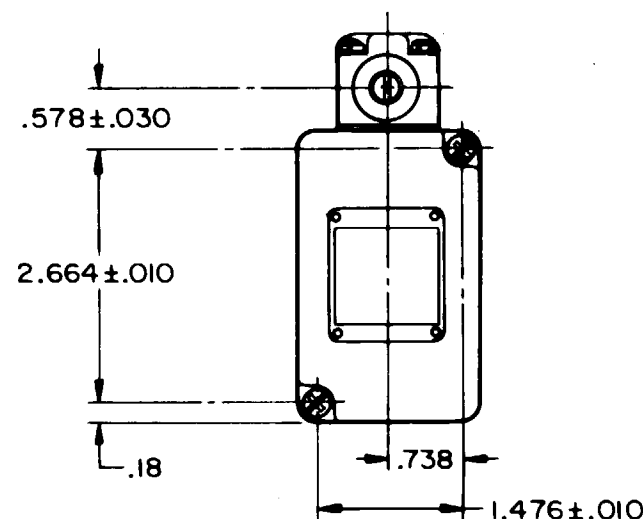
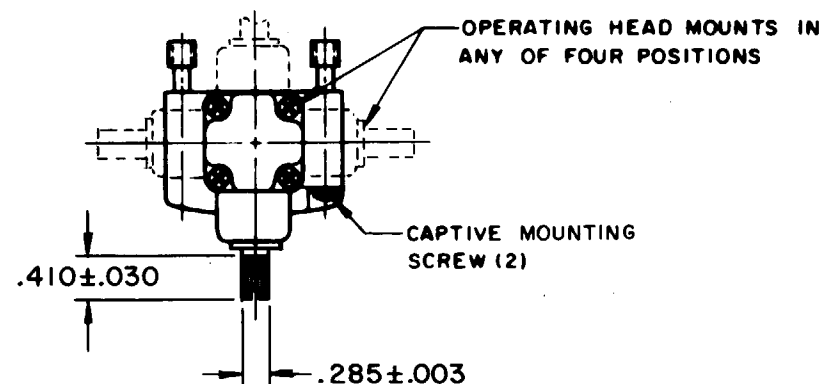


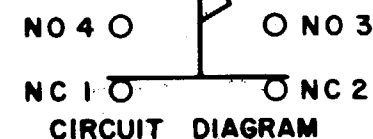

NOTE-

- 1 - SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE ---- 4 1/2 LB IN MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE ---- 6 LB IN MAX	10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC	UNLESS OTHERWISE NOTED
RELEASE TORQUE ---- 3/4 LB IN MIN	3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC	DIMENSIONS ARE IN INCHES
PRETRAVEL ---- 20° MAX	.1A - 550 VDC	TOLERANCES ARE:
DIFFERENTIAL TRAVEL ---- 12° MAX	PILOT DUTY: 600 VAC MAX	ONE PLACE (.0) ±.030
OVERTRAVEL ---- 30° MIN		TWO PLACE (.00) ±.015
RELEASE TRAVEL ---- 5° MIN		THREE PLACE (.000) ±.005
SWITCH-BASIC REPLACEMENT ---- 2MNG		ANGLES ±
		WEIGHT

201LS2

M

DRAWING NUMBER

ISSUE

6

REVISIONS

A	CO15200	OMW	23 JUN 65
B	CO25152	MBS	24 APR 69
C	CO-77031	JDB	22 DEC 93

REPLACES

RELEASE NO.

WCS 24 JUN 65

CHECK

WCS 24 JUN 65

CHECK

WRA 24 JUN 65

CHECK

WRA 24 JUN 65

CHECK

WRA 24 JUN 65

CHECK

WRA 24 JUN 65

CHECK

WRA 24 JUN 65

CHECK

WRA 24 JUN 65

FO-80378-003

DRAWN

OMW 23 JUN 65