


A

B


C

D

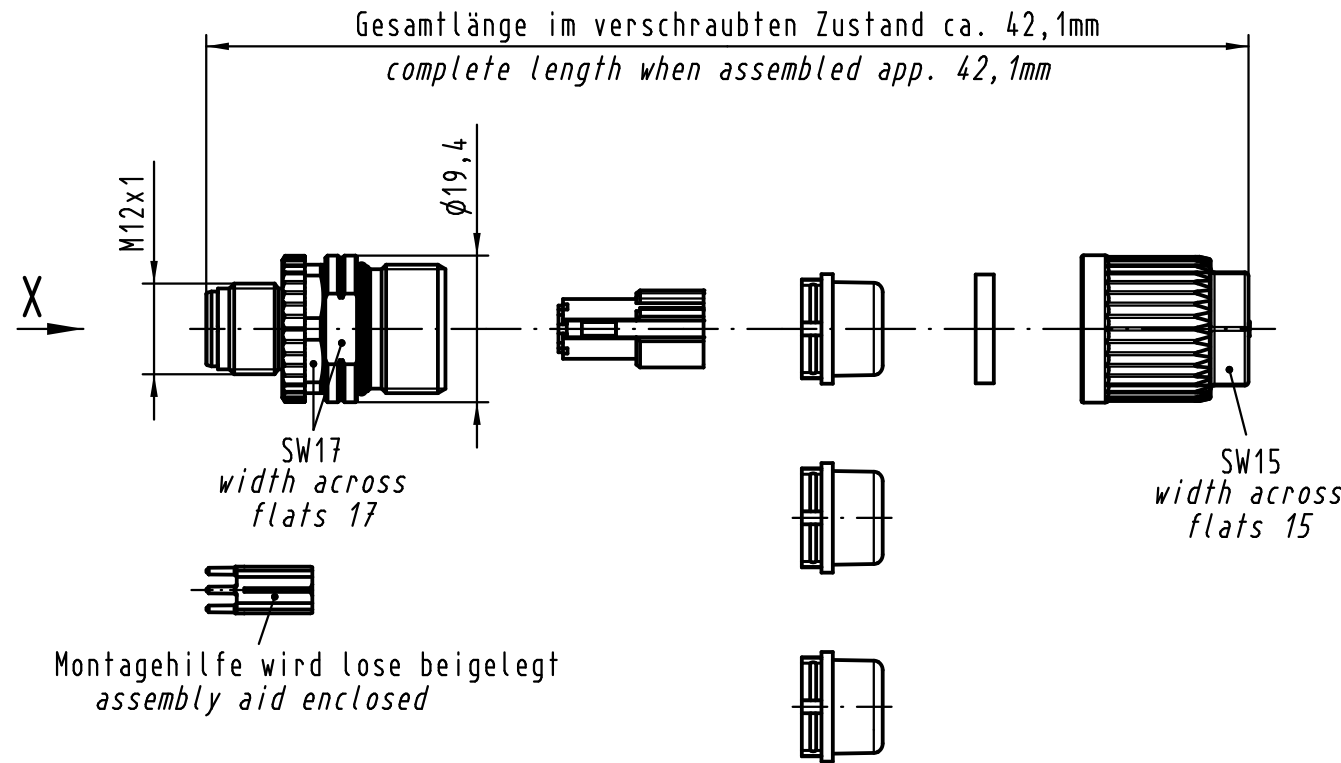

Spannung/voltage: 250V a.c/d.c
Strom/current: 4A/40°C
Betriebstemperatur: -40°C - +85°C
working temperature:


X (2:1)



Steckgesicht nach
contact face acc. to
IEC 61076-2-101

Montagehilfe wird lose beigelegt
assembly aid enclosed

Crimpkontakte separat bestellen
order contacts separately

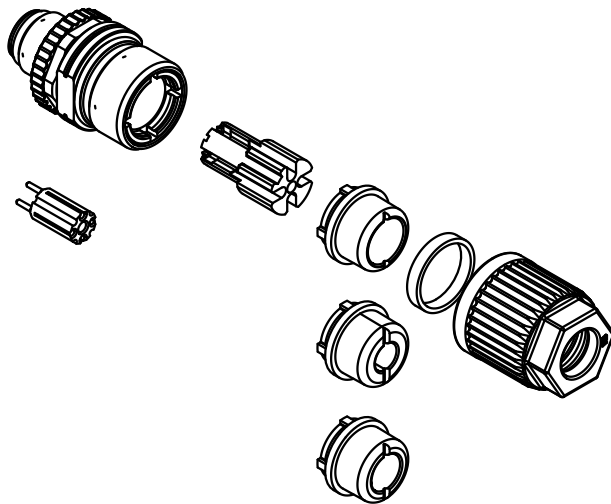

Kabelø / cableø			Leiterquerschnitt wire gauge	Bestell-Nr. part-no.
5,5-7,2mm	4,5-5,4mm	7,0-8,8mm	AWG 26-22	09 67 000 5576
Dichtung / sealing			AWG 24-20	09 67 000 8576
schwarz/black	transparent	beige	AWG 22-18	09 67 000 3576

			All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
				Dat.	Name	Maßstab/Scale 1 : 1	RSV M12-L <i>circular connector M12-L</i> 4-polig Stift D-kodiert Crimp geschirmt <i>4-pole male D-coded crimp shielded</i>				
			Detail.	16.04.12	Bus.						
			Insp.		Ge						
			Stand.								
EC04958			HARTING Electronics GmbH & Co. KG				TB 21 03 882 1405XL			Blatt/ page /	
Mod. Dat. Name			D-32339 ESPELKAMP								
						Sub.					