


HONEYWELL PART NUMBER
21SM144-T
PRODUCT CODE TXK4402

REV	DOCUMENT	CHANGED BY	CHECK
3	0038111	PK 20MAY08	ASD

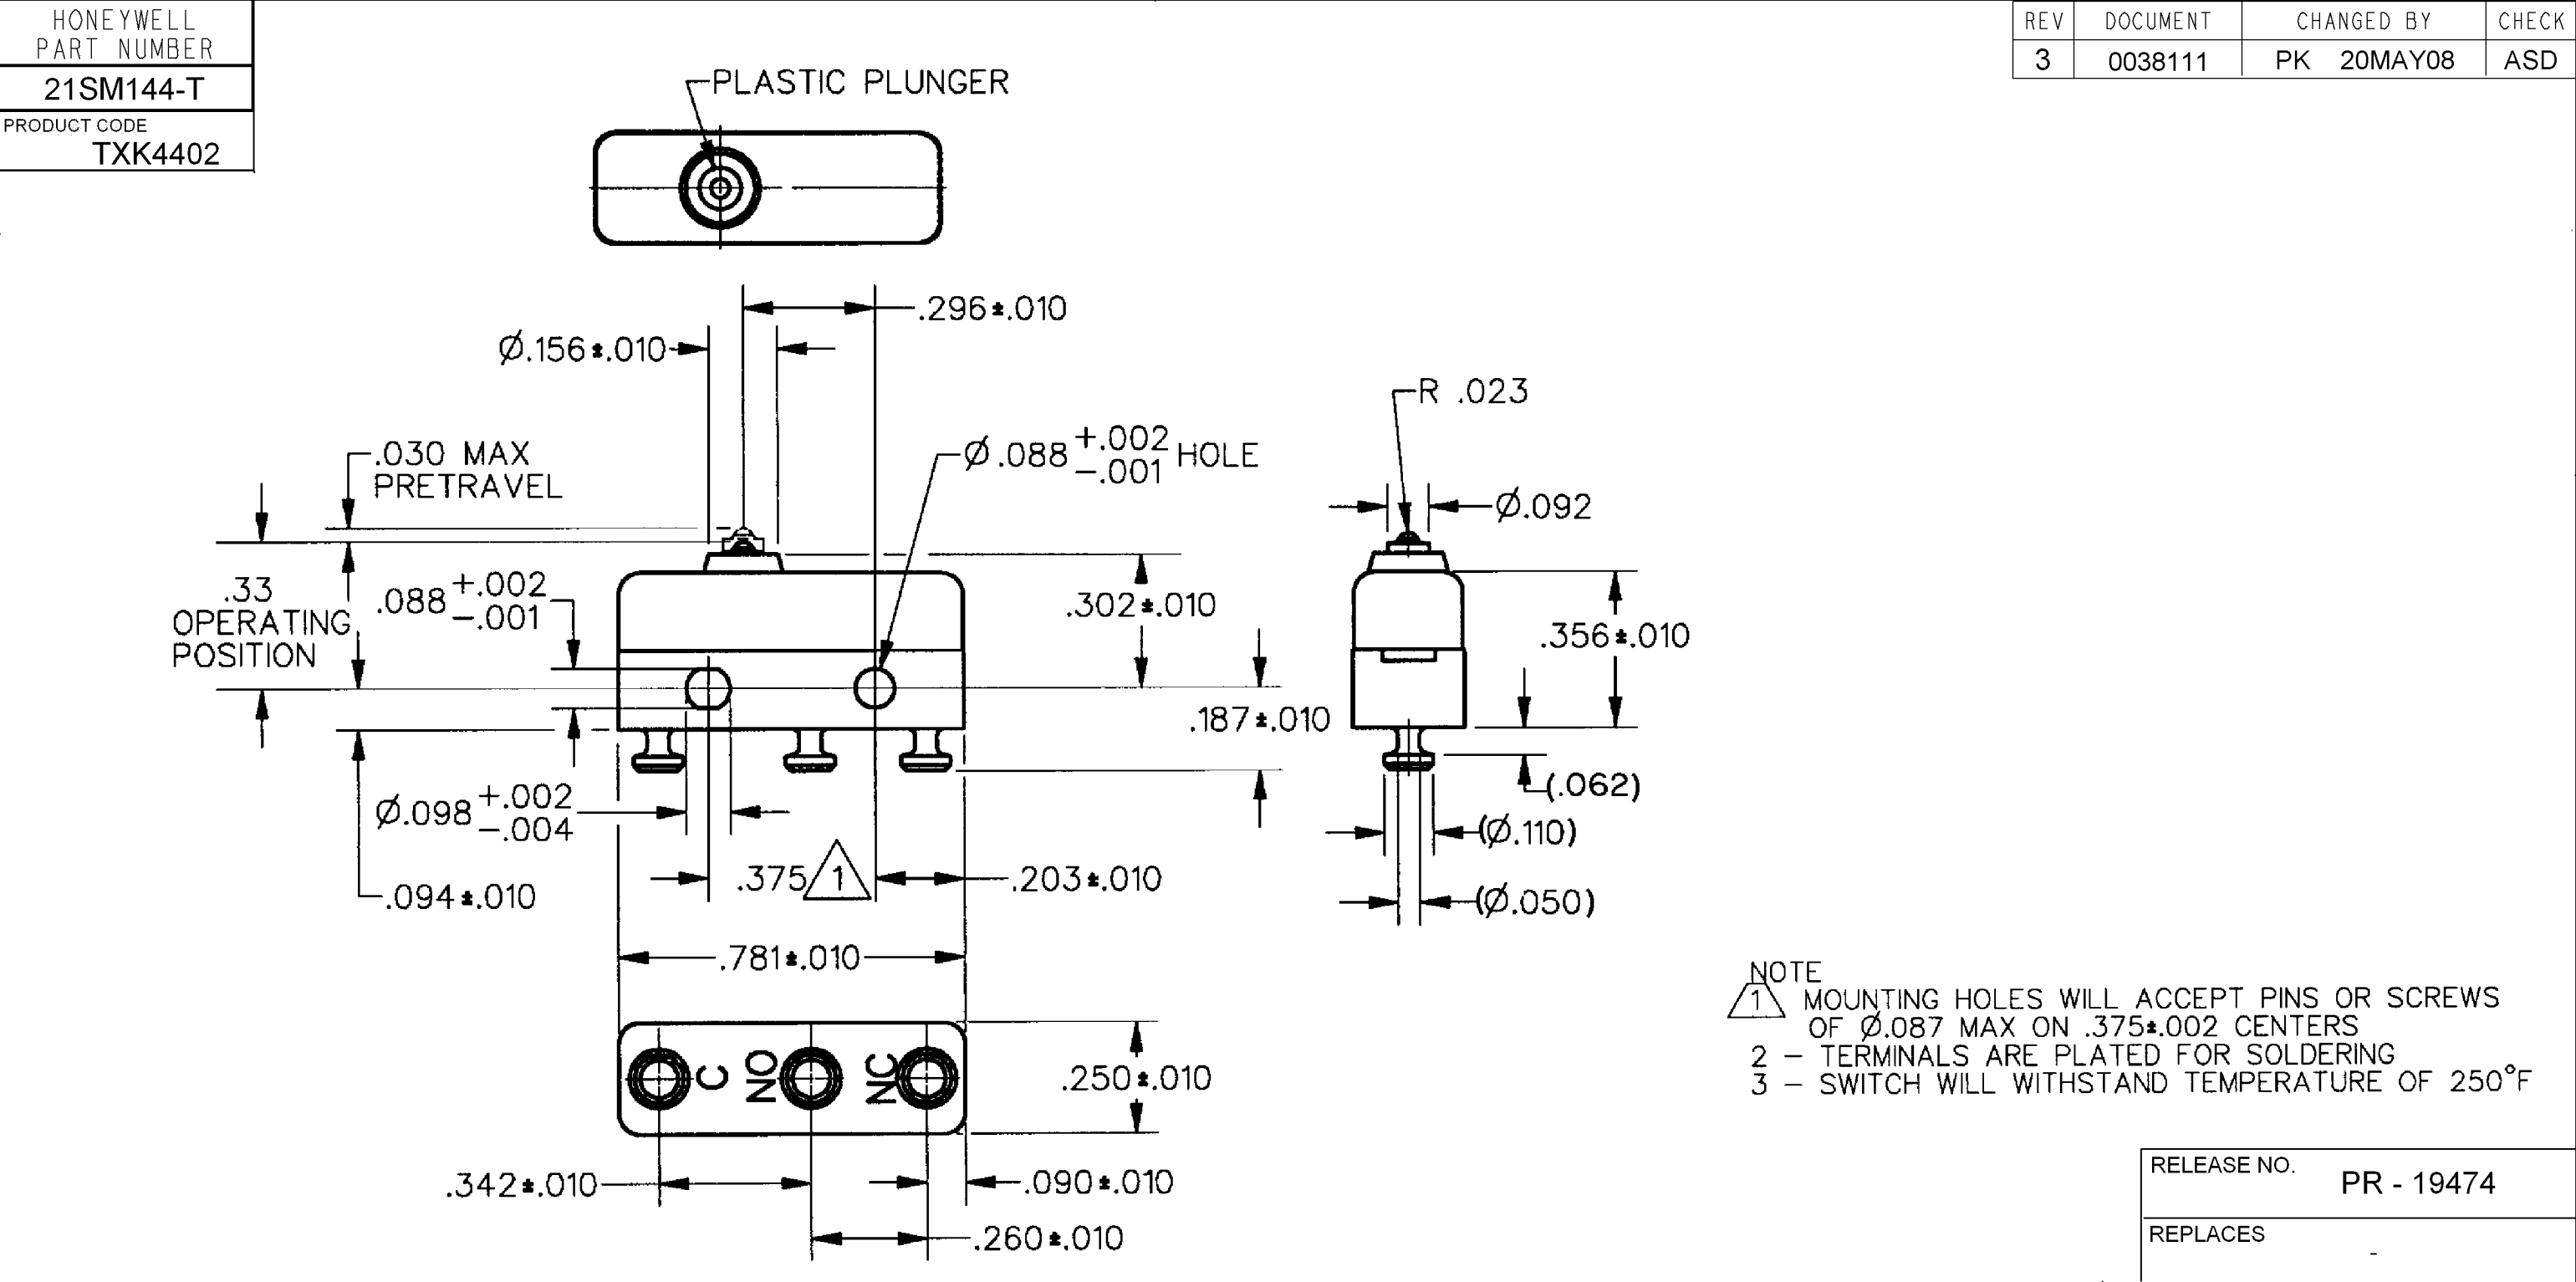

RELEASE NO. PR - 19474

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	17OCT07		Honeywell			
OPERATING FORCE — — — — 3 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	17OCT07					
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL— — — .002 MAX				SEA LEVEL	50,000 FT												
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE	3 AMP	2.5 AMP													
		RESISTIVE	5 AMP	5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV			
		MAXIMUM INRUSH 24 AMP								B	I	21SM144-T		3			
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4  		RASTER				SCALE	-	WEIGHT .008 LB MAX	SHEET 1 OF 1				
			UL, CSA	5A, 250 VAC   BRAND L4													