


REV	DOCUMENT	CHANGED BY	CHECK
8	0038111	PK 20MAY08	ASD

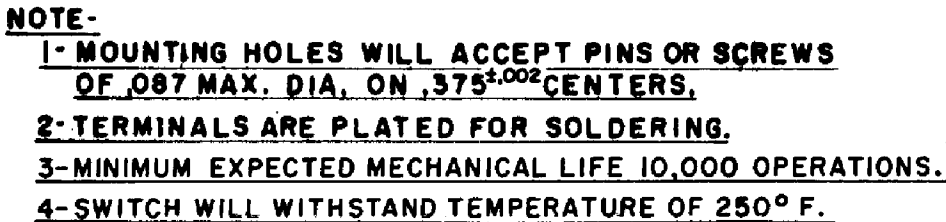

RELEASE NO.	SR-5993
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	VK	17OCT07	Honeywell			
OPERATING FORCE — — — - 4 - 7 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	17OCT07				
DIFFERENTIAL FORCE — — - 2 - 4 OZ		30 VOLTS DC RATING					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
RELEASE FORCE— — — — 1 OZ MIN			SEA LEVEL	50,000 FT									
DIFFERENTIAL TRAVEL— — .002 - .008		INDUCTIVE		3 AMP	2.5 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL — — — — — .005 MIN		RESISTIVE		5 AMP	5 AMP				B	I	21SM35		8
		MAXIMUM INRUSH 24 AMP			THIRD ANGLE PROJECTION 		RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
		APPROVALS		KEMA, CE			5A, 250V ~ T85 1E4		CE	UL, CSA	5A, 250 VAC		BRAND L4