


|                          |
|--------------------------|
| HONEYWELL<br>PART NUMBER |
| 21SX14-T                 |
| PRODUCT CODE<br>VDM1450  |

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| 7   | 0038449  | VS 28APR08 | BLR   |

B

A

A

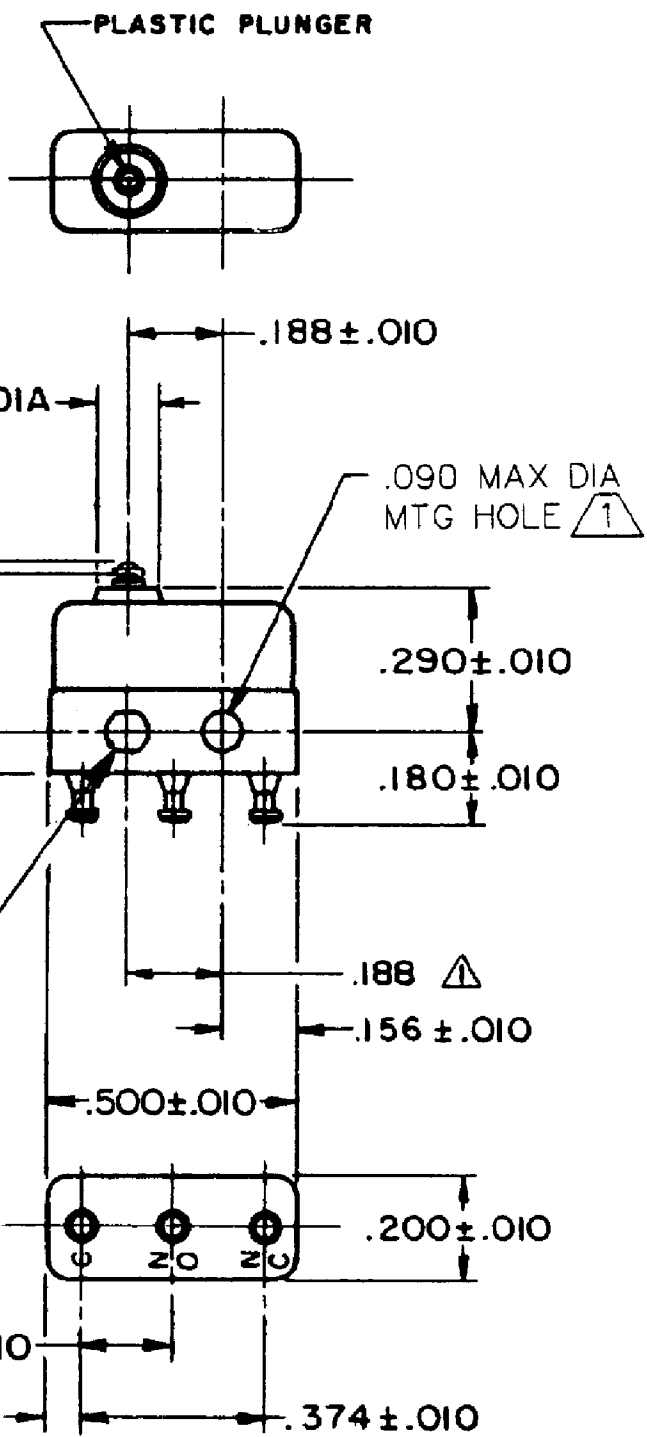

**NOTE -**  
▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS  
2-TERMINALS ARE PLATED FOR SOLDERING  
3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

|             |         |
|-------------|---------|
| RELEASE NO. | SR-9888 |
| REPLACES    | -       |

|                                   |                             |                                                                                       |                                                                                                                                                                 |    |           |                             |      |                    |              |
|-----------------------------------|-----------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-----------|-----------------------------|------|--------------------|--------------|
| CHARACTERISTICS                   | ELECTRICAL DATA             | DESIGN UNITS: INCH                                                                    | DRAWN                                                                                                                                                           | VK | 06 MAR 08 | <b>Honeywell</b>            |      |                    |              |
| OPERATING FORCE — — — 5 OZ MAX    | CONTACT ARRANGEMENT<br>SPDT | TOLERANCES UNLESS NOTED:                                                              | CHECK                                                                                                                                                           | RJ | 06 MAR 08 |                             |      |                    |              |
| RELEASE FORCE— — — — 1 OZ MIN     |                             | NO PLACE X ±                                                                          | THIS DRAWING COVERS A PROPRIETARY ITEM<br>AND IS THE PROPERTY OF HONEYWELL.<br>THIS DRAWING IS NOT TO BE COPIED OR USED<br>WITHOUT THE PERMISSION OF HONEYWELL. |    |           | TITLE<br><br>SWITCH - BASIC |      |                    |              |
| DIFFERENTIAL TRAVEL— — — .003 MAX |                             | ONE PLACE .X ± 0.030                                                                  |                                                                                                                                                                 |    |           |                             |      |                    |              |
| OVERTRAVEL — — — — — .004 MIN     |                             | TWO PLACE .XX ± 0.015                                                                 | INTERPRET PER ANSI Y14.5M-1982<br>OTHER HONEYWELL ENGINEERING<br>STANDARDS MAY APPLY                                                                            |    |           |                             |      |                    |              |
|                                   |                             | THREE PLACE .XXX ± 0.005                                                              |                                                                                                                                                                 |    |           |                             |      |                    |              |
|                                   |                             | FOUR PLACE .XXXX ±                                                                    |                                                                                                                                                                 |    |           |                             |      |                    |              |
|                                   |                             | ANGLES ±                                                                              |                                                                                                                                                                 |    |           | SIZE                        | TYPE | DRAWING NAME       | REV          |
|                                   |                             | THIRD ANGLE PROJECTION                                                                |                                                                                                                                                                 |    |           | B                           | I    | 21SX14-T           | 7            |
|                                   |                             |  | RASTER                                                                                                                                                          |    |           | SCALE                       | -    | WEIGHT .003 LB MAX | SHEET 1 OF 1 |