

HONEYWELL
PART NUMBER

21SX39-H58



PRODUCT CODE

VDM3890

JG-NUMBER

JG-80973

REV	DOCUMENT	CHANGED BY	CHECK
10	0038449	VS 28APR08	BLR

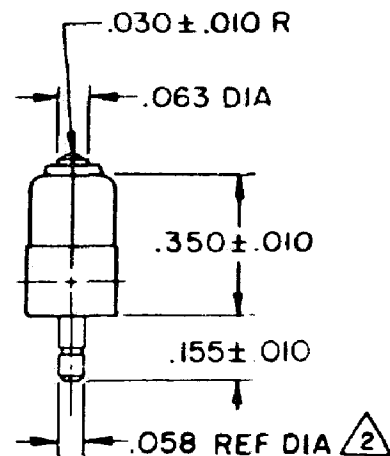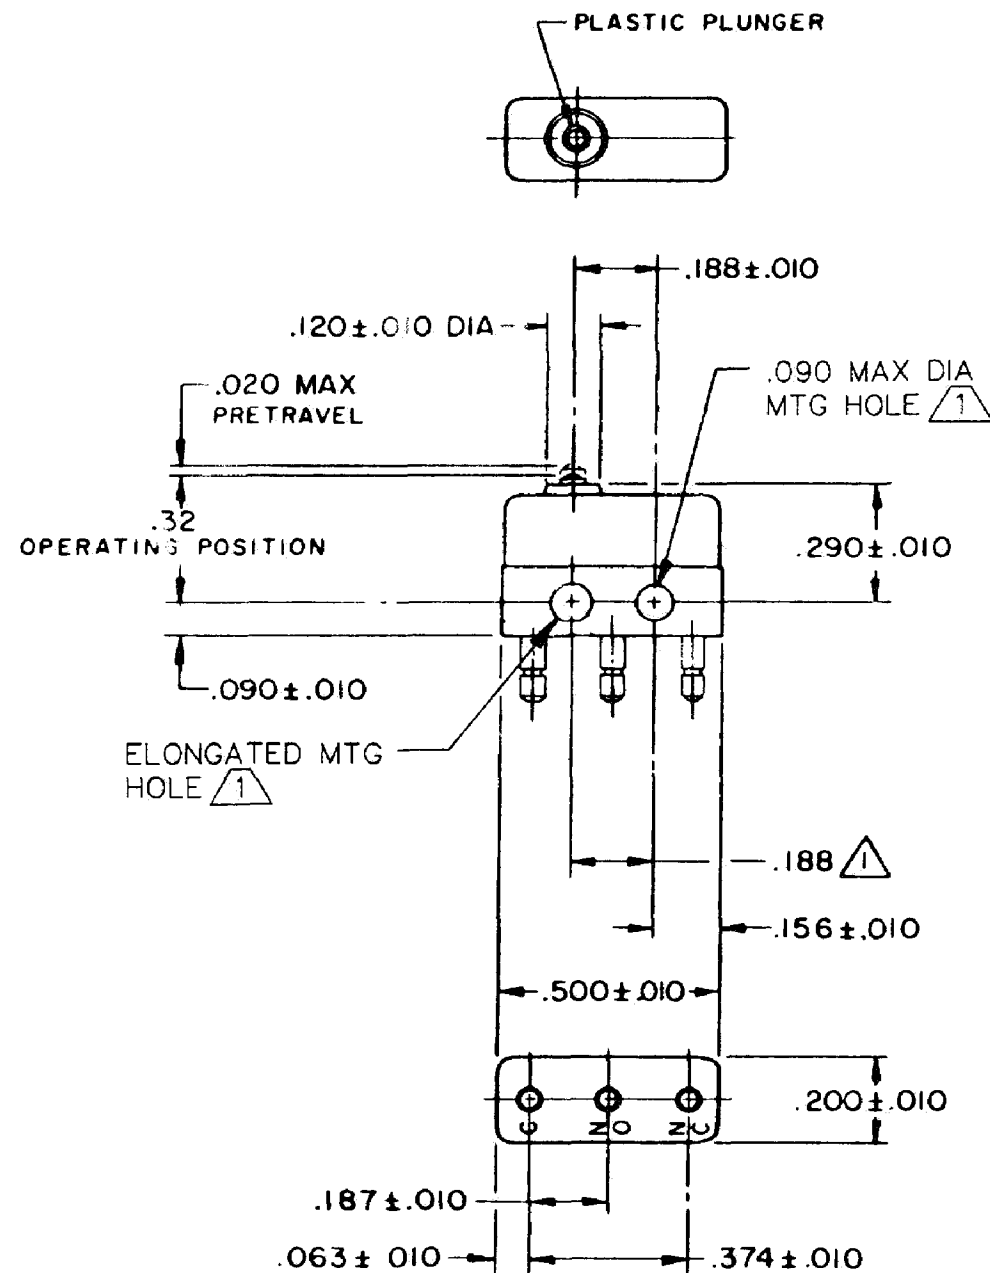

NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS

PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.

3 - SWITCH WILL WITHSTAND TEMPERATURE OF 185° F

RELEASE NO.
PR-3216

REPLACES

CHARACTERISTICS

OPERATING FORCE - - - 5 OZ MAX

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .005 MAX

OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

	28 VOLTS DC RATING	115 VOLTS AC, 60 CPS
	SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP	2.5 AMP
RESISTIVE	7 AMP	4 AMP
LAMP	2.5 AMP	2.5 AMP

APPROVALS	KEMA, CE	7A 250 V ~ T125 5E4	UL, CSA	7A 250 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

0.030
0.015
0.005

THIRD ANGLE PROJECTION



DRAWN

SPK

20FEB08

CHECK

RJ

20FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

TYPE

DRAWING NAME

REV

B**I****21SX39-H58****10**

SCALE

-

WEIGHT: .003 LB MAX

SHEET 1 OF 1