


HONEYWELL PART NUMBER
22SM157-T2
PRODUCT CODE
TXQ5770
JG-80732

REV	DOCUMENT	CHANGED BY	CHECK
4	0038444	KVS 09APR08	ASD

B

A

A

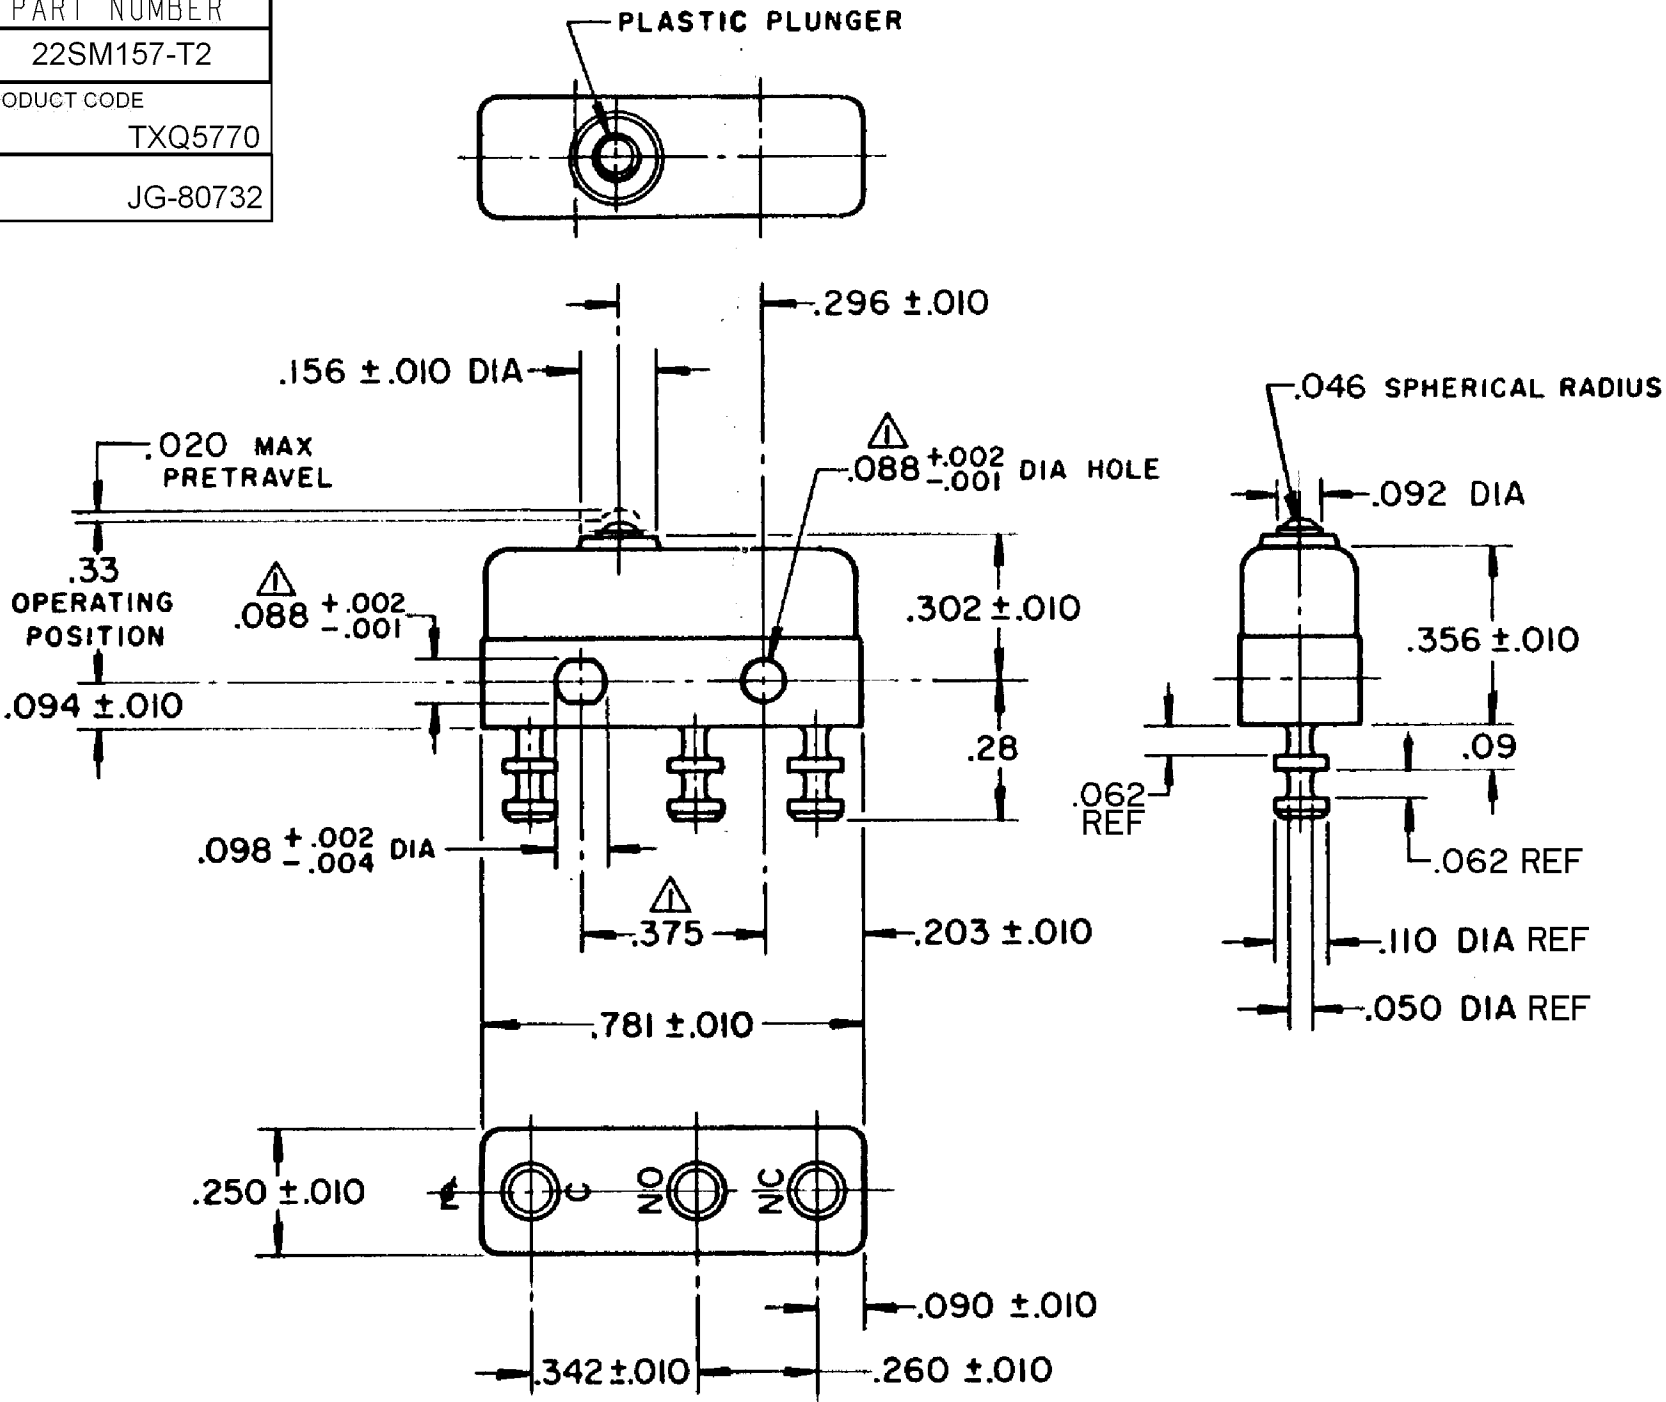

NOTE -
△-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ±.002 CENTERS
2- TERMINALS ARE PLATED FOR SOLDERING
3- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.
SR-10951
REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	VK	20 FEB 08		Honeywell			
OPERATING FORCE – – – – 3 - 7 OZ		CONTACT ARRANGEMENT SPDT		TOLERANCES UNLESS NOTED:		CHECK	RJ	20 FEB 08					
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING		NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE					
		SEA LEVEL		ONE PLACE .X ±									
DIFFERENTIAL TRAVEL – – – .004 MAX		INDUCTIVE 5 AMP		TWO PLACE .XX ±									
OVERTRAVEL – – – – – .003 MIN		RESISTIVE 10AMP		THREE PLACE .XXX ±									
				FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME		REV	
				THIRD ANGLE PROJECTION		RASTER		B	I	22SM157-T2		4	
								SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		