



HONEYWELL PART NUMBER
22SM157-T
PRODUCT CODE TXQ5760
JG-80725

REV	DOCUMENT	CHANGED BY	CHECK
7	0038444	KVS 09APR08	ASD

B

A

A

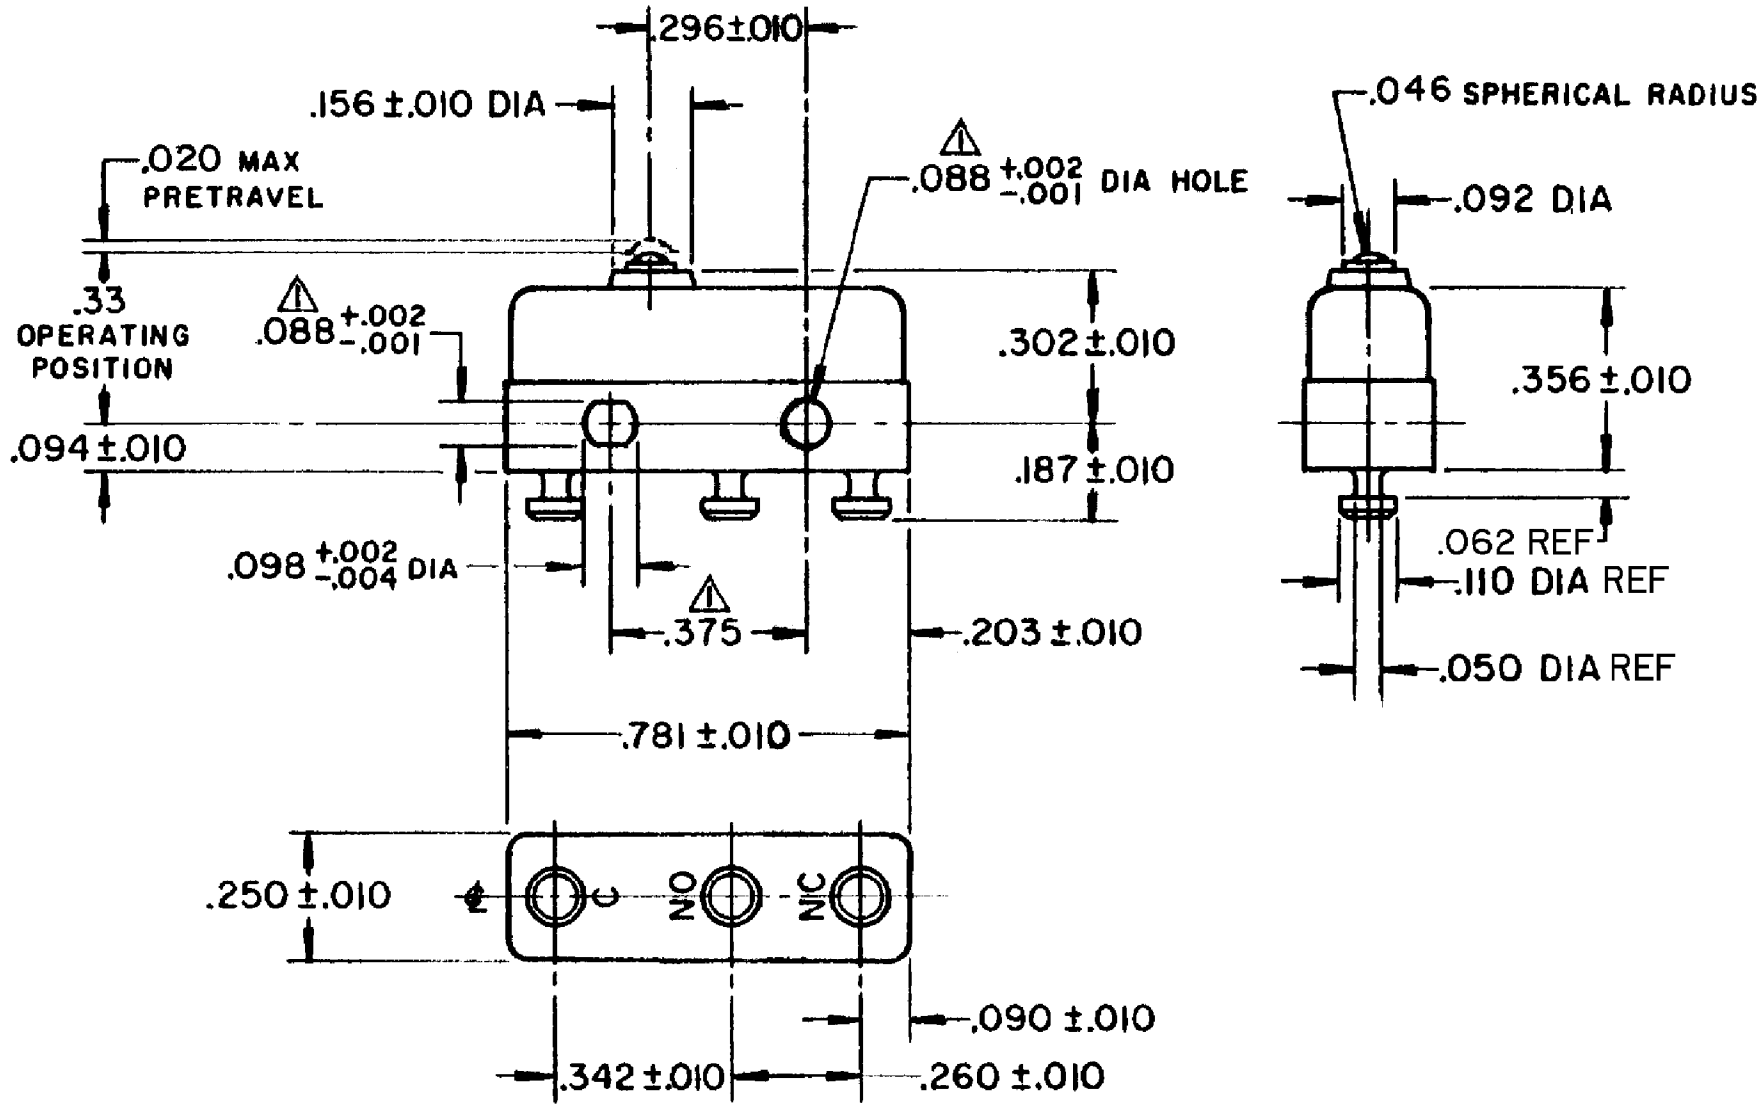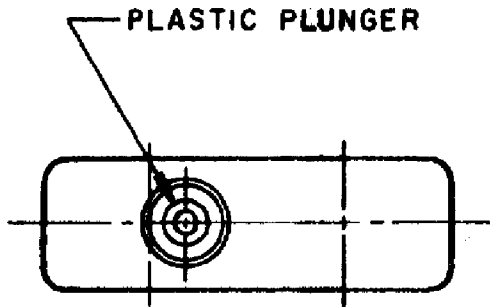

- NOTES
- ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 - 2-TERMINALS ARE PLATED FOR SOLDERING
 - 3- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	SR-9084
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	VK	20 FEB 08		Honeywell			
OPERATING FORCE – – – – 3 - 7 OZ		CONTACT ARRANGEMENT SPDT		TOLERANCES UNLESS NOTED:		CHECK	RJ	20 FEB 08					
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING		NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE					
DIFFERENTIAL TRAVEL – – – .004 MAX		SEA LEVEL		0.030 ONE PLACE .X ±									
				0.015 TWO PLACE .XX ±									
				0.005 THREE PLACE .XXX ±									
OVERTRAVEL – – – – .003 MIN		INDUCTIVE 5 AMP		FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME		REV	
		RESISTIVE 10AMP		ANGLES ±		RASTER		B	I	22SM157-T		7	
				THIRD ANGLE PROJECTION				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		