



HONEYWELL
PART NUMBER

22SM22-T

PRODUCT CODE

TXP2260

REV	DOCUMENT	CHANGED BY	CHECK
10	0038111	PK 20MAY08	ASD

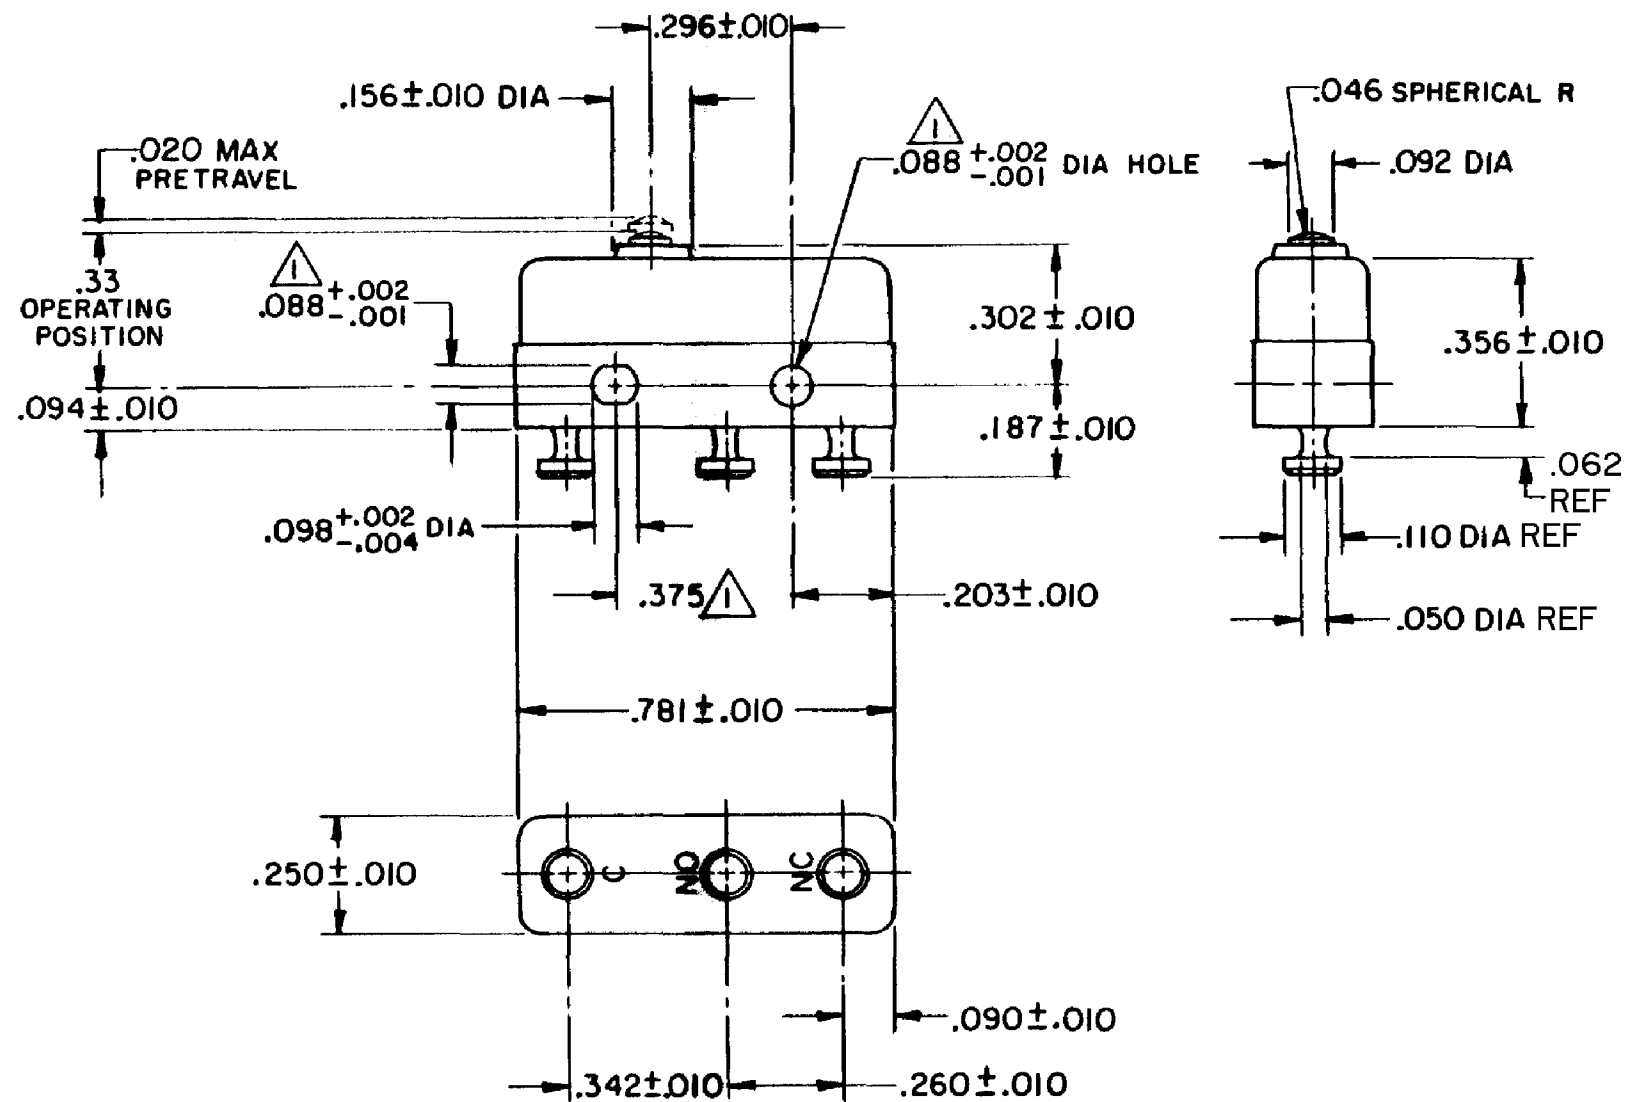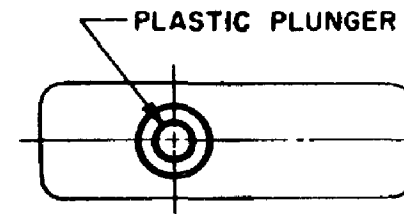

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.

REPLACES

CHARACTERISTICS

OPERATING FORCE - - - - 3 - 5 OZ

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - .004 MAX

OVERTRAVEL - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	UL, CSA	5A, 250 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN

VK

19 OCT 07

CHECK

RJ

19 OCT 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

22SM22-T

REV

10

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1