


HONEYWELL PART NUMBER
22SM426-T2
PRODUCT CODE TXT2810

REV	DOCUMENT	CHANGED BY	CHECK
3	0038112	KVS 04JUN08	ASD

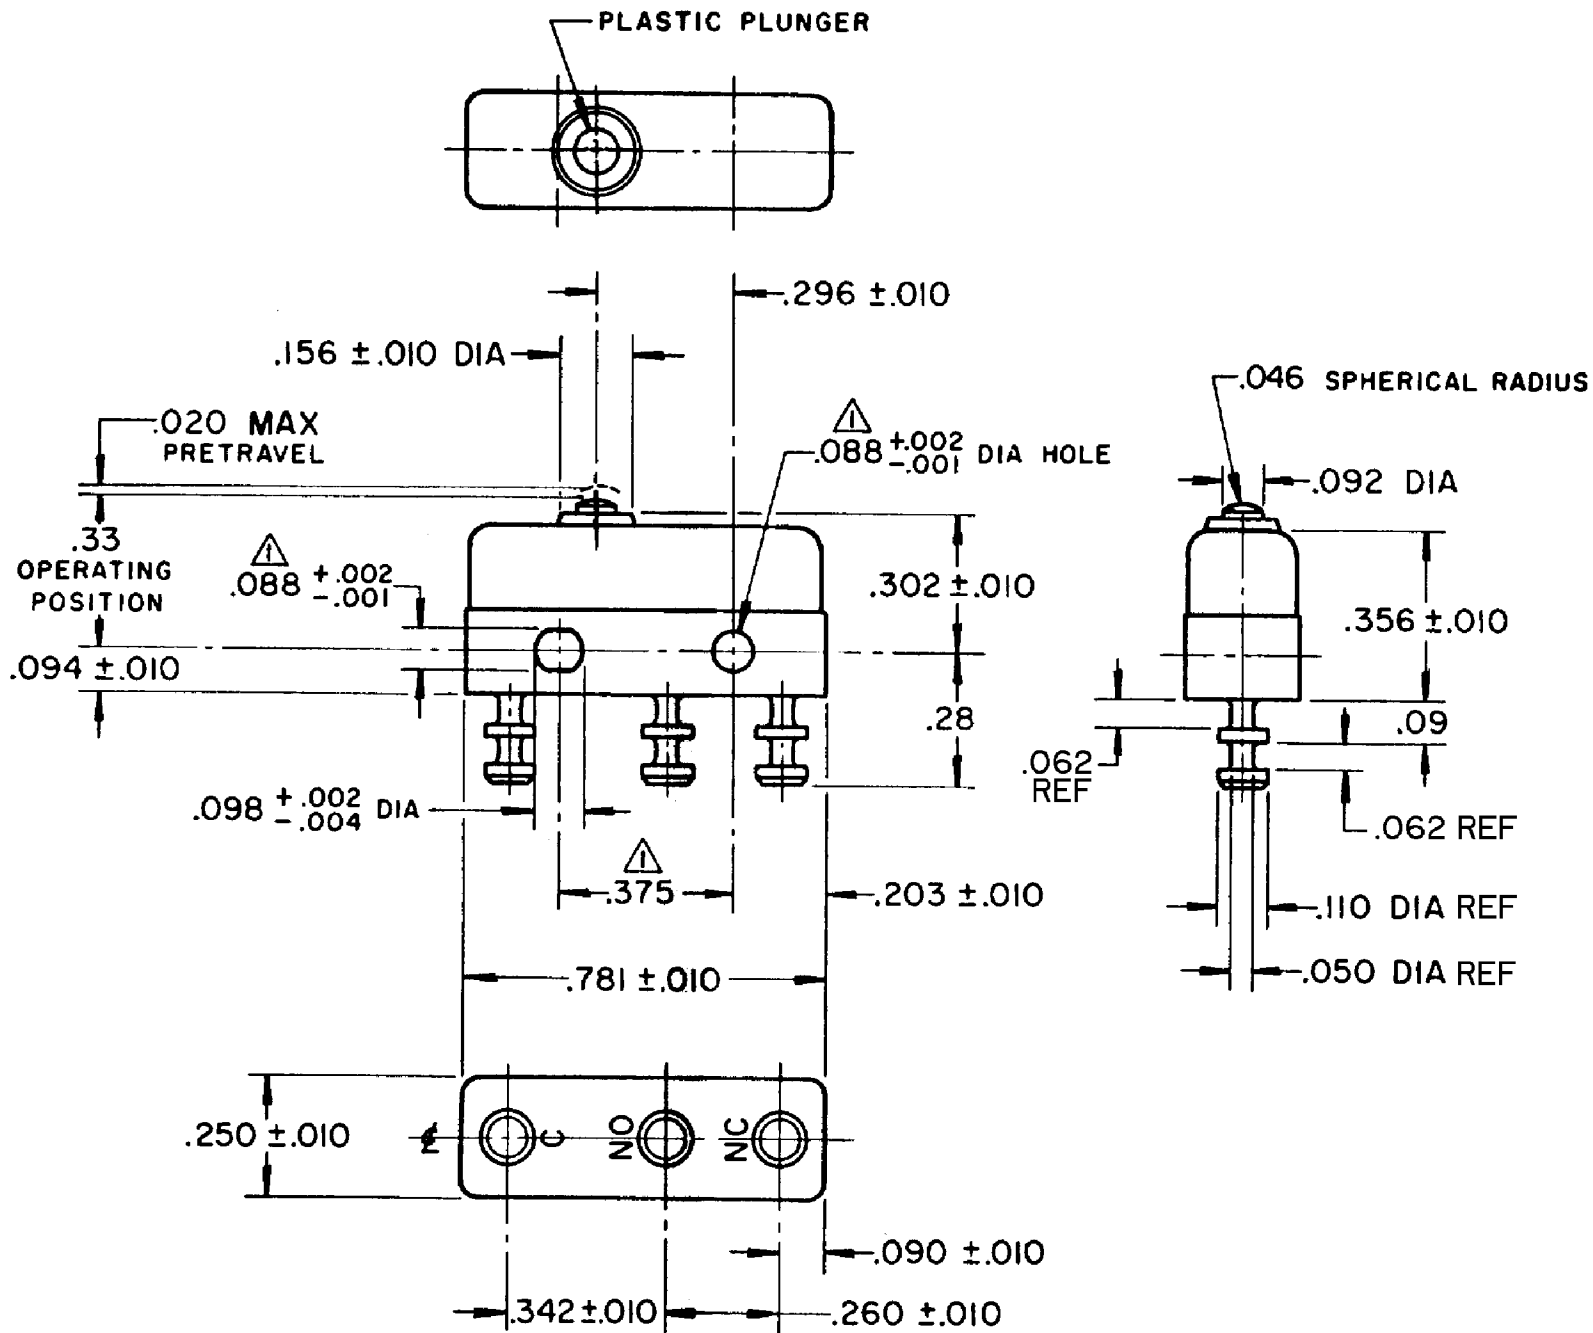

NOTES
△-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
2- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO. PR - 15323
REPLACES X84414 - SM

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	22 OCT 07		Honeywell					
OPERATING FORCE — — — 3 1/2 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	22 OCT 07							
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.						TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — — .001 MAX			SEA LEVEL		50,000 FT														
OVERTRAVEL — — — — — .003 MIN		INDUCTIVE	3 AMP		2.5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						SIZE	TYPE	DRAWING NAME		REV		
		RESISTIVE	5 AMP		5 AMP								B	I	22SM426-T2		3		