Number of contacts

20

Identification	Part-Number Male insert (M)	Part-Number Female insert (F)	Drawings	Dimensions in mm
Module	**09 14 001 3011**	**09 14 001 3111**	M 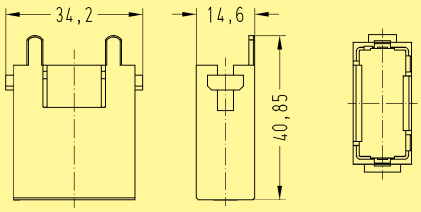 F 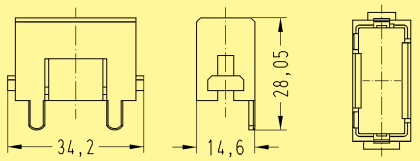	

Identification	Wire gauge mm²	Part-Number Male contacts (M)	Part-Number Female contacts (F)	Drawings	Dimensions in mm
Han® Shielded module insert 20 + shield crimp contacts order separately		**09 14 020 3013**	**09 14 020 3113**	M  F  Contact arrangement View termination side	

Han® D-Sub crimp contacts gold plated			
	0.08-0.21	09 67 000 7576	09 67 000 7476
	0.13-0.33	**09 67 000 5576**	**09 67 000 5476**
	0.33-0.52	**09 67 000 8576**	**09 67 000 8476**

Wire gauge	ø	Stripping length of stranded wire
0.08 - 0.21 mm²	AWG 28-24	4 mm
0.13 - 0.33 mm²	AWG 26-22	4 mm
0.33 - 0.52 mm²	AWG 22-20	4 mm

Stock items in bold type