


REV	DOCUMENT	CHANGED BY	CHECK
4	0038112	KVS 04JUN08	ASD

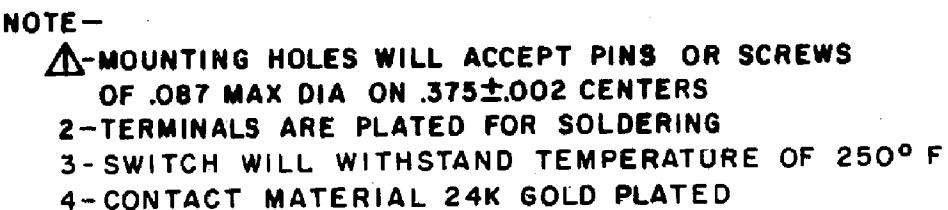

RELEASE NO.	SR - 12325
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN	VK	22 OCT 07	Honeywell					
OPERATING FORCE – – – – 3-5 OZ		CONTACT ARRANGEMENT SPDT					CHECK	RJ	22 OCT 07						
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING			- 0.030 - 0.015 - 0.005 -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL – – – .004 MAX			SEA LEVEL	50,000 FT											
OVERTRAVEL – – – – – .003 MIN		INDUCTIVE		1/2 AMP			1/2 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE		1 AMP			1 AMP				B	I	23SM13		4
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 		RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		
		APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4				CE	UL, CSA	1A, 125 VAC		BRAND	L 22		