
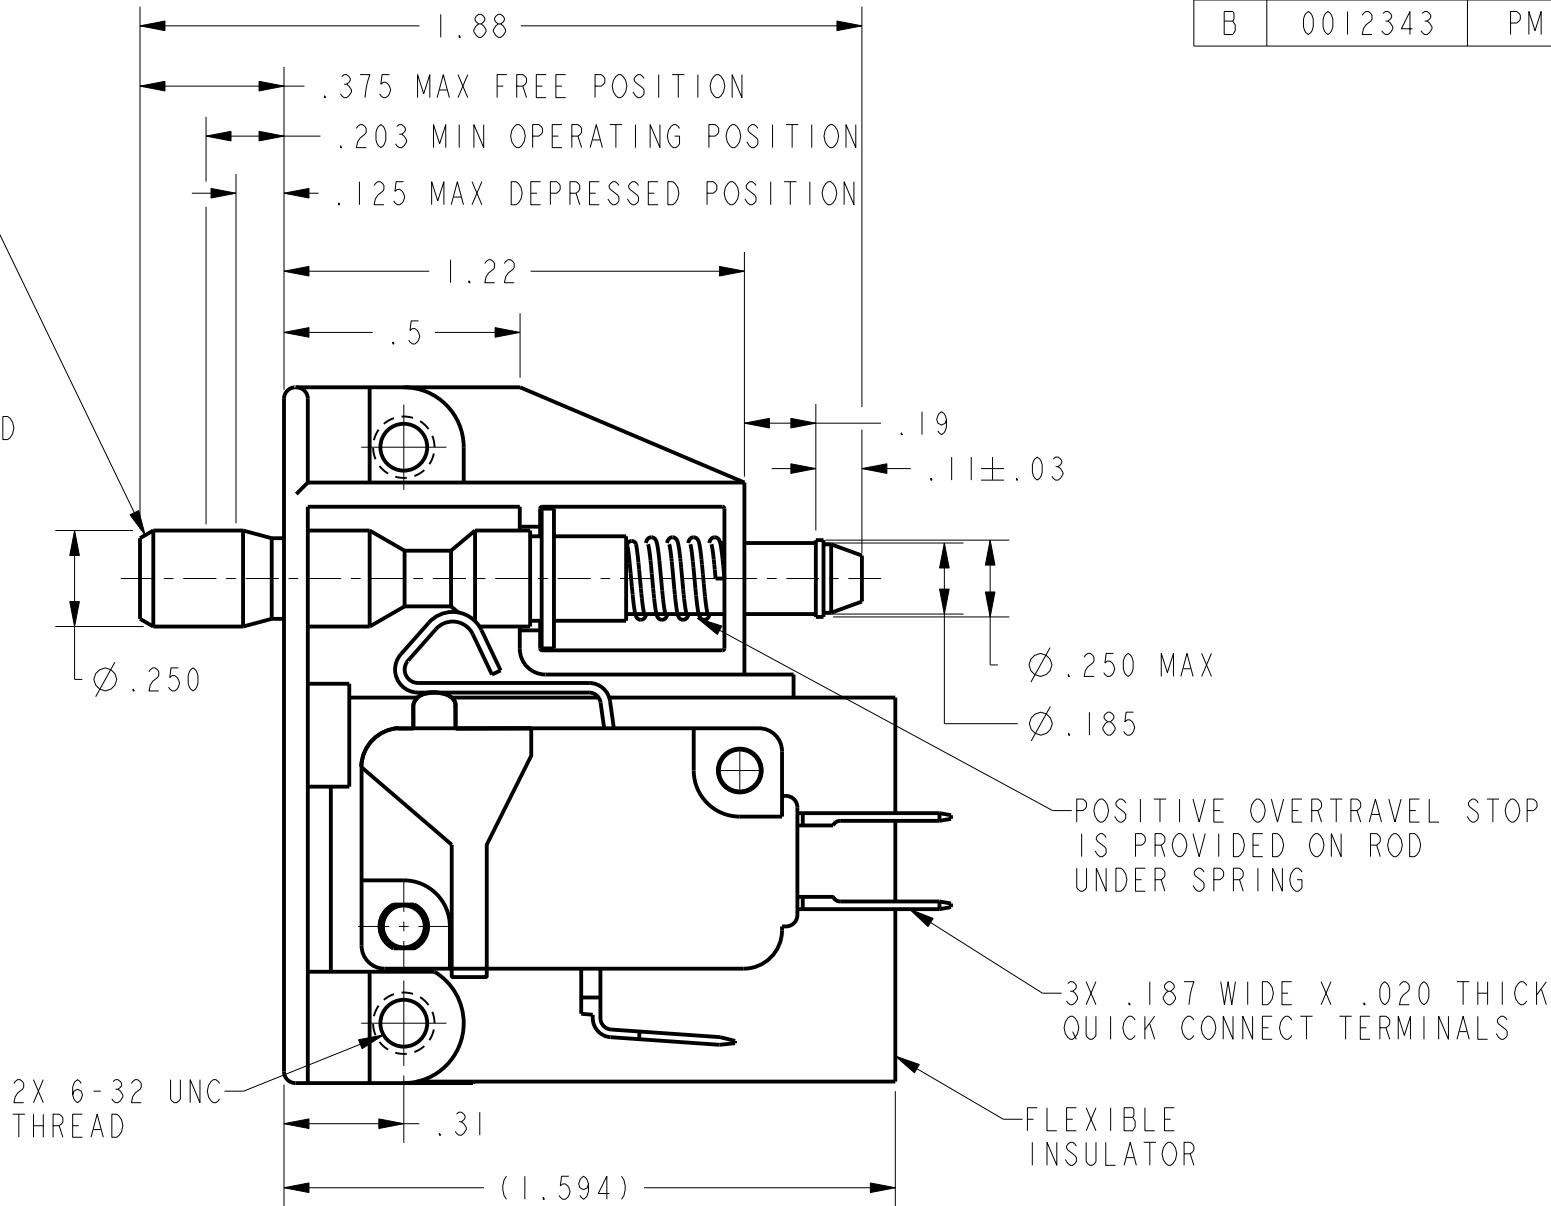


HONEYWELL PART NUMBER
23AC80-UL
KCR1635

REV	DOCUMENT	CHANGED BY	CHECK
B	0012343	PM 11APR05	AK

PUSH TO OPERATE-RETURNS
AUTOMATICALLY TO POSITION
SHOWN
PULL TO OPERATE-REMAINS IN
OPERATED POSITION UNTIL RESET
FOR AUTOMATIC RETURN BY NEXT
FULL STROKE "PUSH" OPERATION

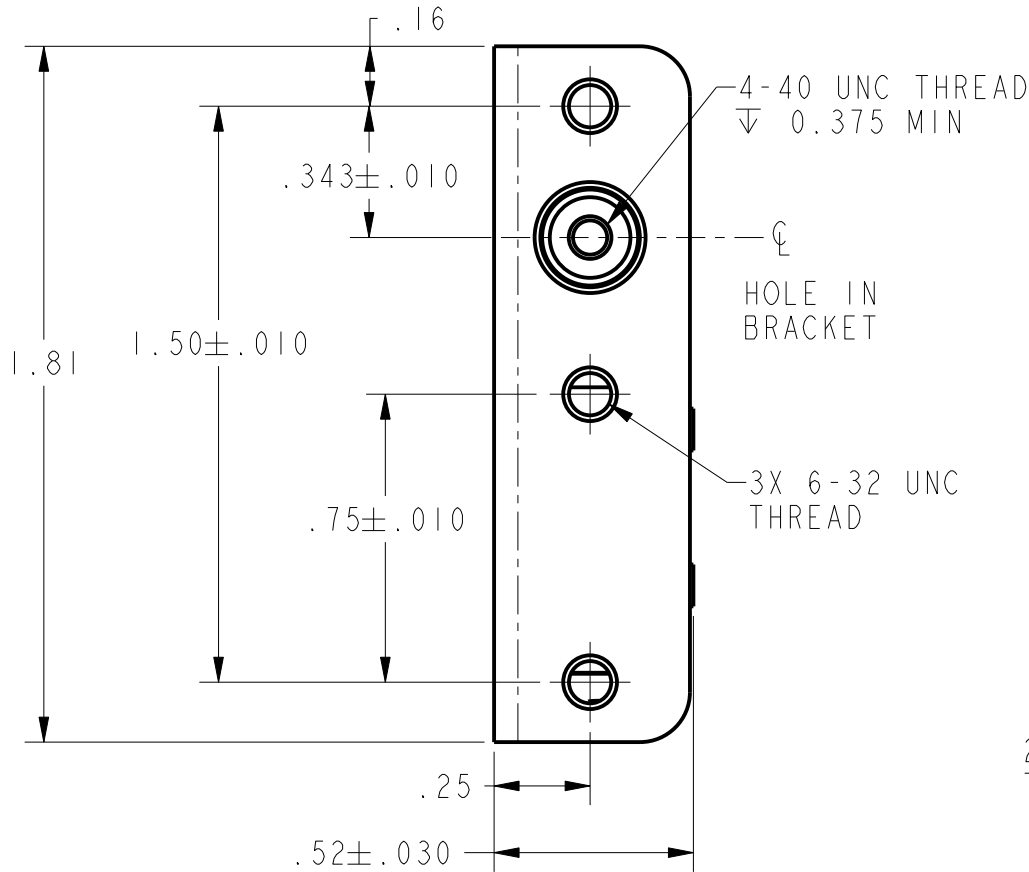

- NOTES
- 1. UNIT INCLUDES CATALOG LISTING "V7-6A17D8-296-S" BASIC SWITCH
 - 2. BASIC SWITCH PLASTIC PARTS ARE MADE OF GLASS FILLED PBT AND TEFLON FILLED PHENOLIC
 - 3. ACTUATOR ROD MADE OF HIGH STRENGTH PLASTIC
 - 4. UL AND CSA APPROVALS APPLY TO ENTIRE ASSEMBLY

REPLACES: X115631-AC

CHARACTERISTICS	ELECTRICAL DATA
TOTAL TRAVEL:	CONTACT ARRANGEMENT
.250 APPROX PUSH DIRECTION	S P D T
.187 APPROX PULL DIRECTION	L162
FULLY DEPRESSED FORCE-- 4 LBS MAX	5A 125, <u>250</u> , 277 VAC
	1/10HP <u>250</u> VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES X ±
THIRD ANGLE PROJECTION

DRAWN	AS	09JUN04
CHECK	AK	09JUN04
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
Pro/ENGINEER 3D		

Honeywell			
TITLE			
ASSEMBLY-SWITCH			
SIZE	TYPE	DRAWING NAME	REV
B	I	23AC80-UL	B
SCALE	2:1	SHEET	1 OF 1