

HONEYWELL PART NUMBER
23SX83-H340
PRODUCT CODE VDP5720

REV	DOCUMENT	CHANGED BY	CHECK
9	0089212	NMN 09MAY12	CMH


B

A

A

B

A

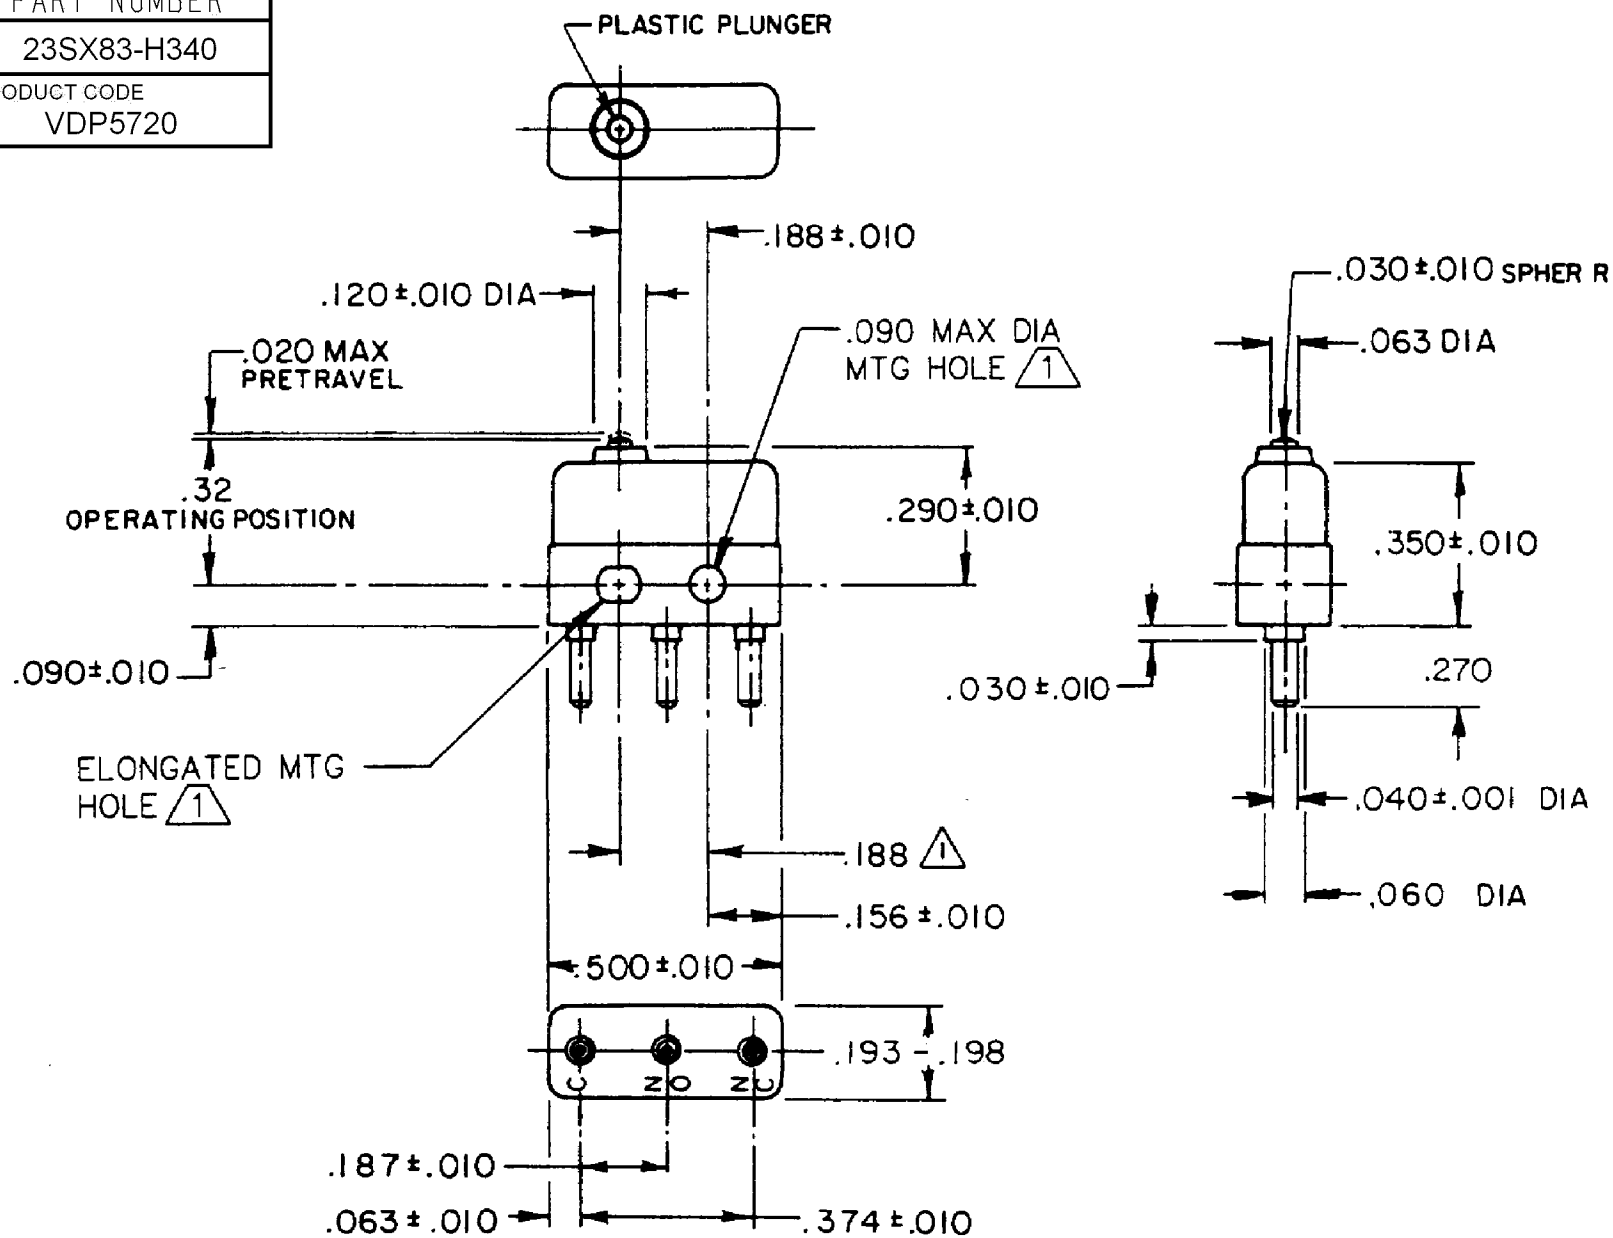

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - MOVABLE CONTACT MATERIAL - GOLD PLATED GOLD ALLOY
 - 4 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
 - 5 - SWITCH WILL WITHSTAND TEMPERATURE OF 185°F

RELEASE NO.	PR-14600
REPLACES	X82921-SX

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	SPK	25FEB08	Honeywell			
OPERATING FORCE — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	25FEB08				
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING			.030 .015 .005 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC						
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT										
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE	0.5 AMP	0.5 AMP										
		RESISTIVE	1 AMP	1 AMP										
		MAXIMUM INRUSH 2 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV		
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3 		  BRAND L22J				B	I	23SX83-H340		9		
	UL, CSA	1A 125 VAC						SCALE	-	WEIGHT:	SHEET 1 OF 1			