

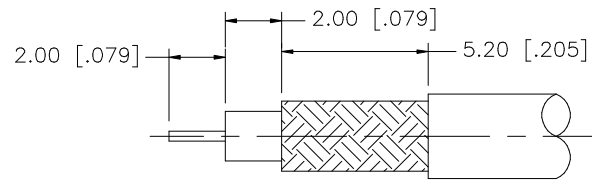
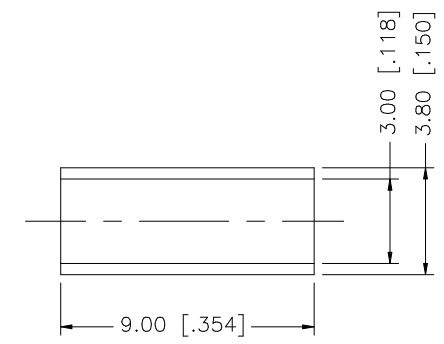


REV.	DATE	DESCRIPTION
NC	12/14/00	INITIAL RELEASE
A	10/19/06	UPDATE DRAWING FORMAT

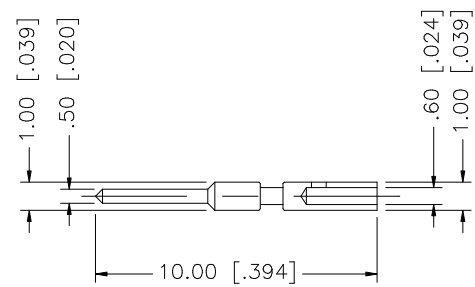

RECOMMENDED CABLE
STRIPPING DIM'S

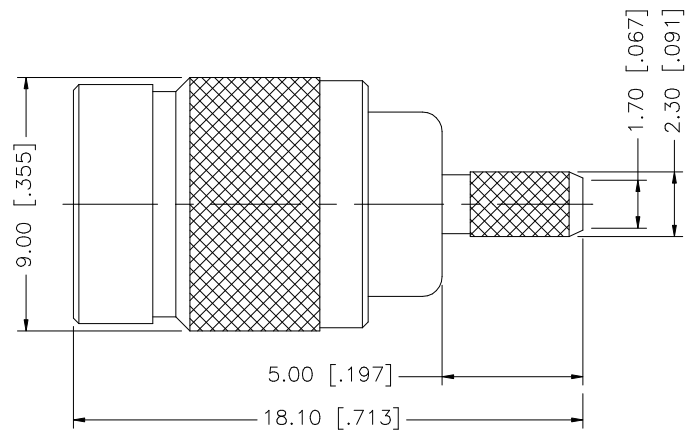

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						10/19/06
6						CHECKED			PART DESCRIPTION 1.0/2.3 CRIMP PLUG (FOR RG–174/U, 188/U, 316/U CABLE)				
5						ISSUED							
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO. 282103				
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 282103.DWG REV. A SIZE A SCALE NA					
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									