

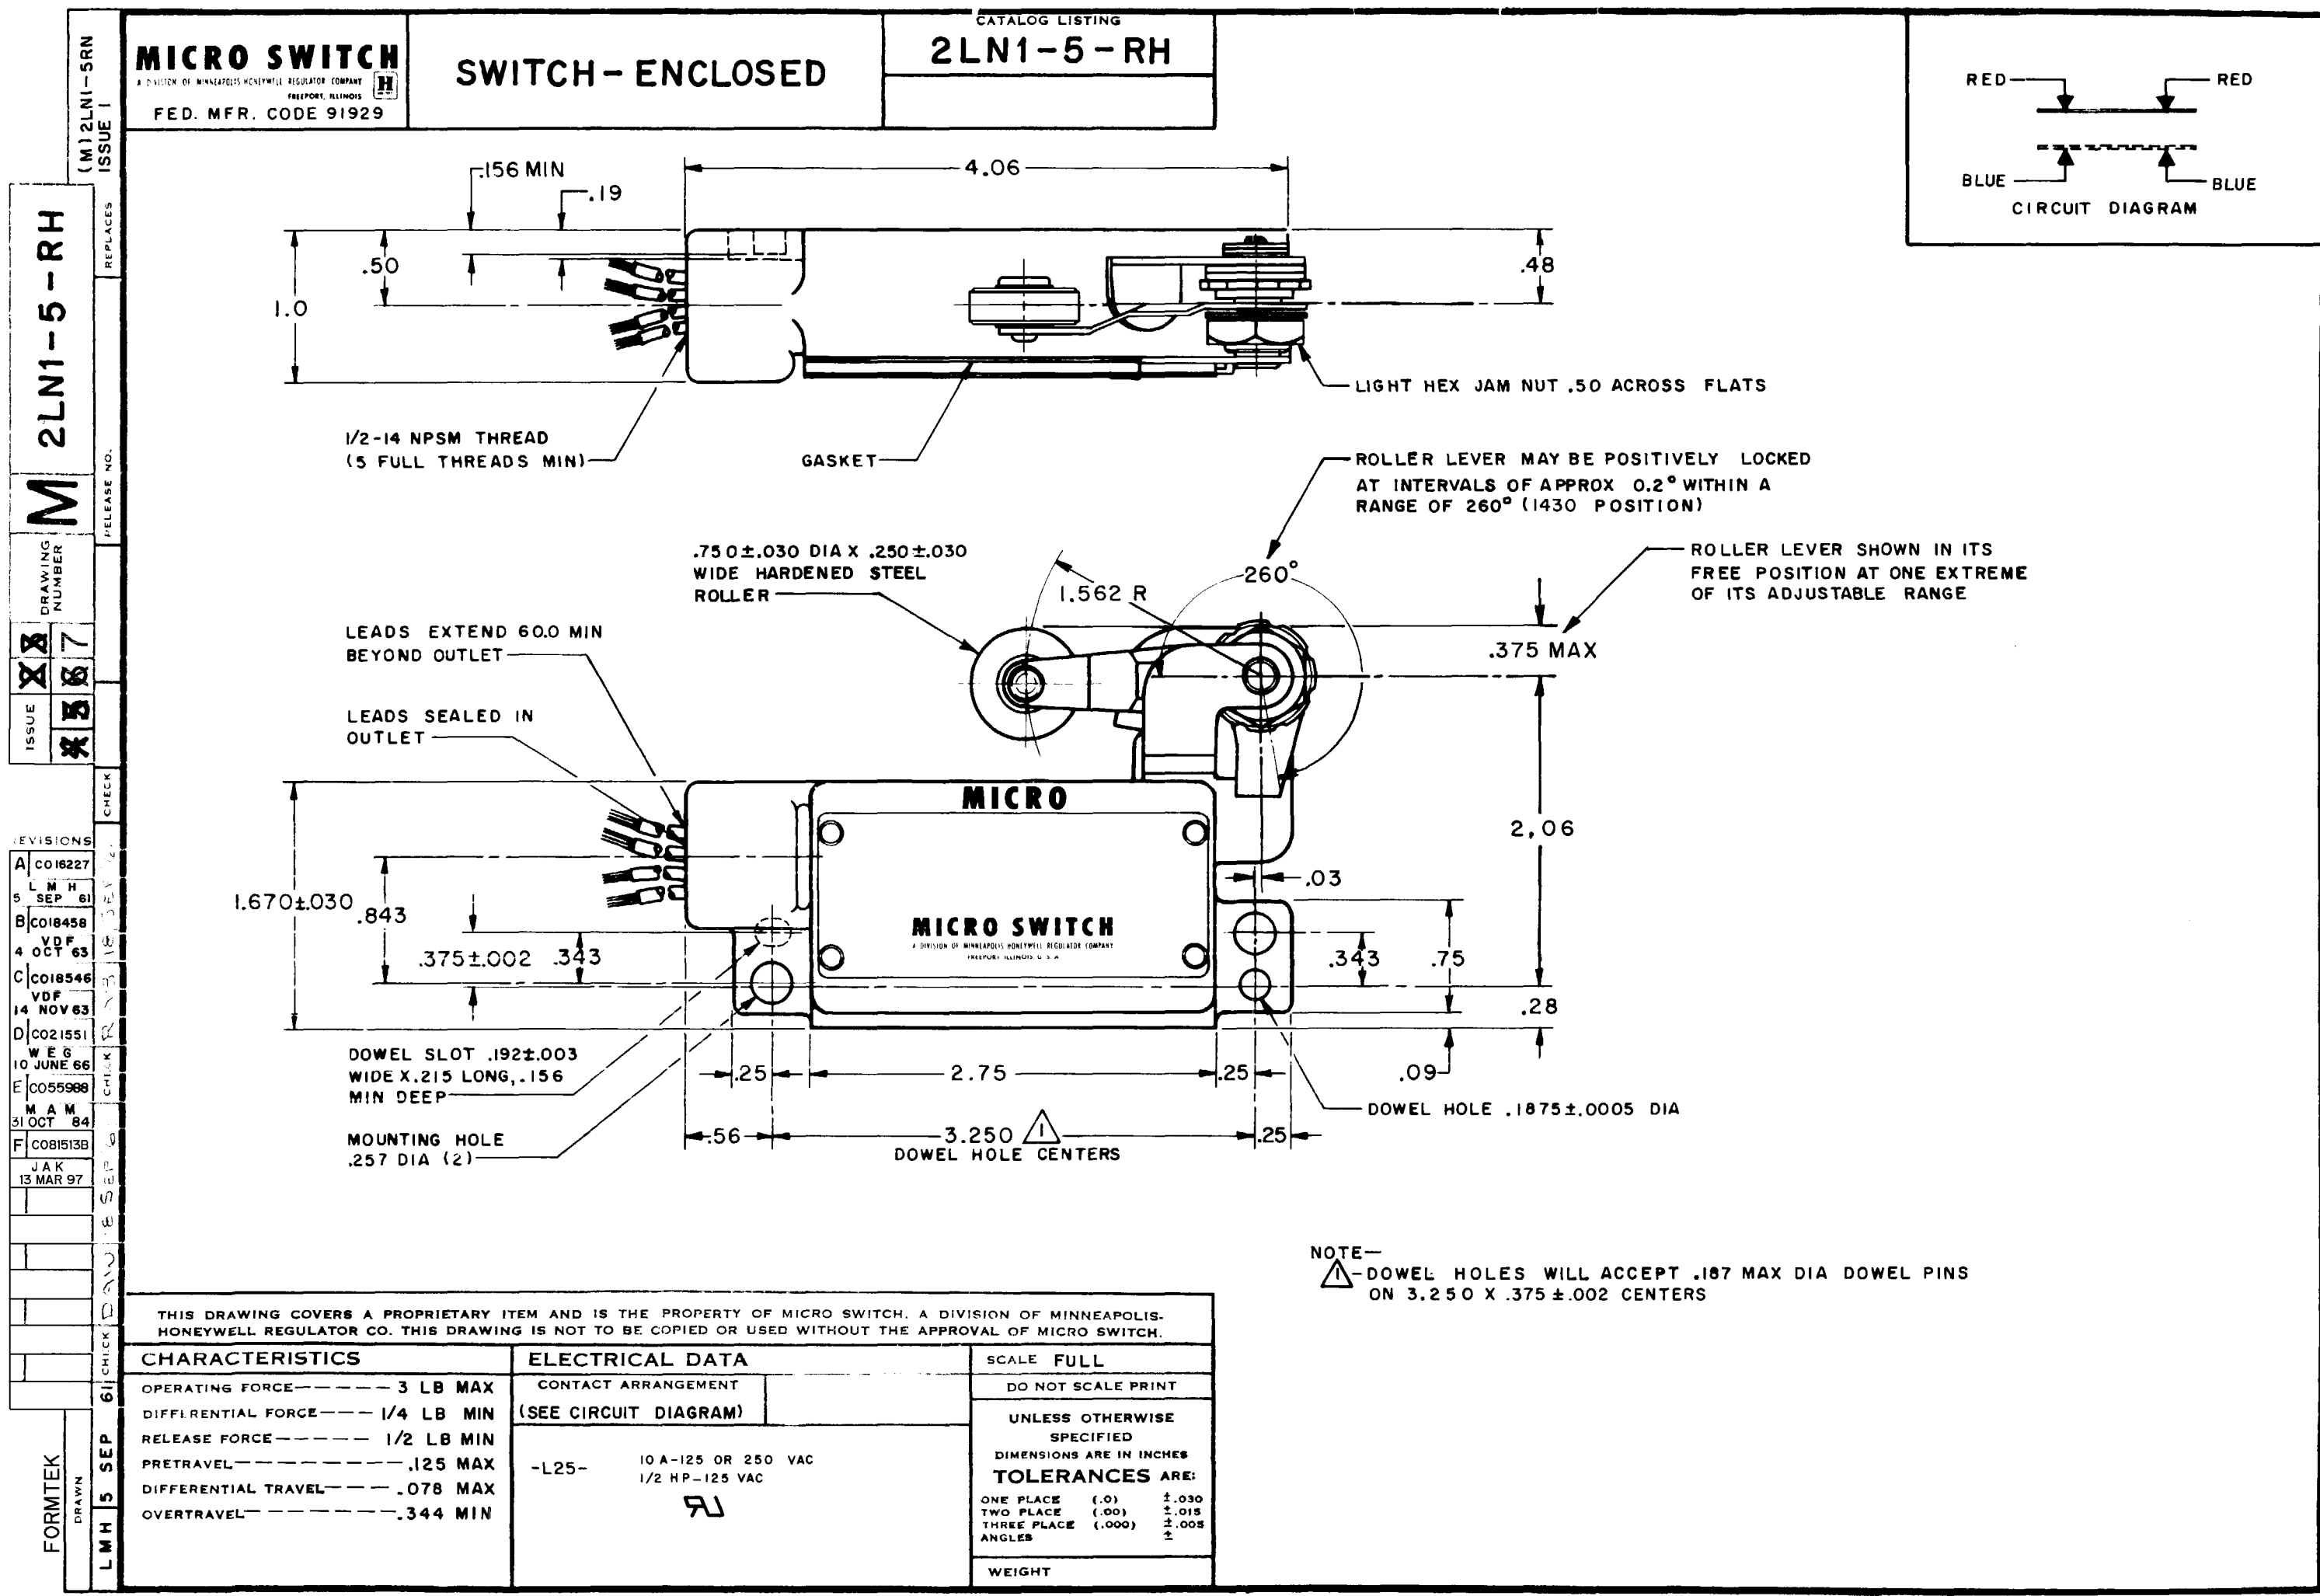
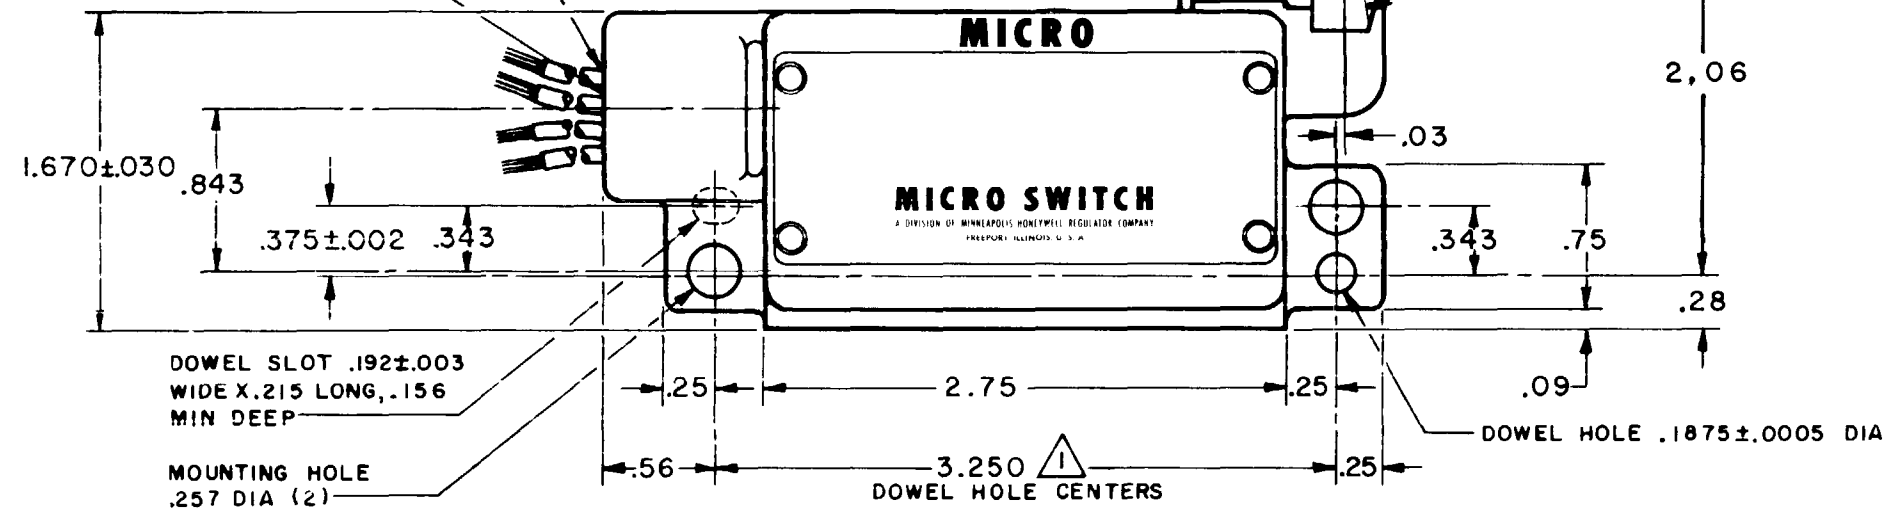
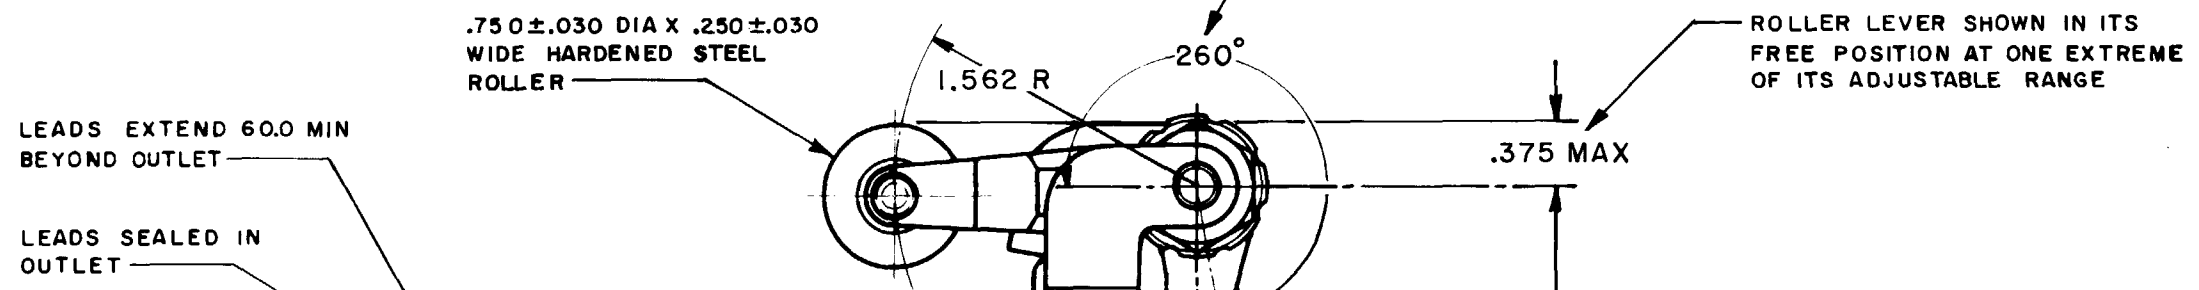


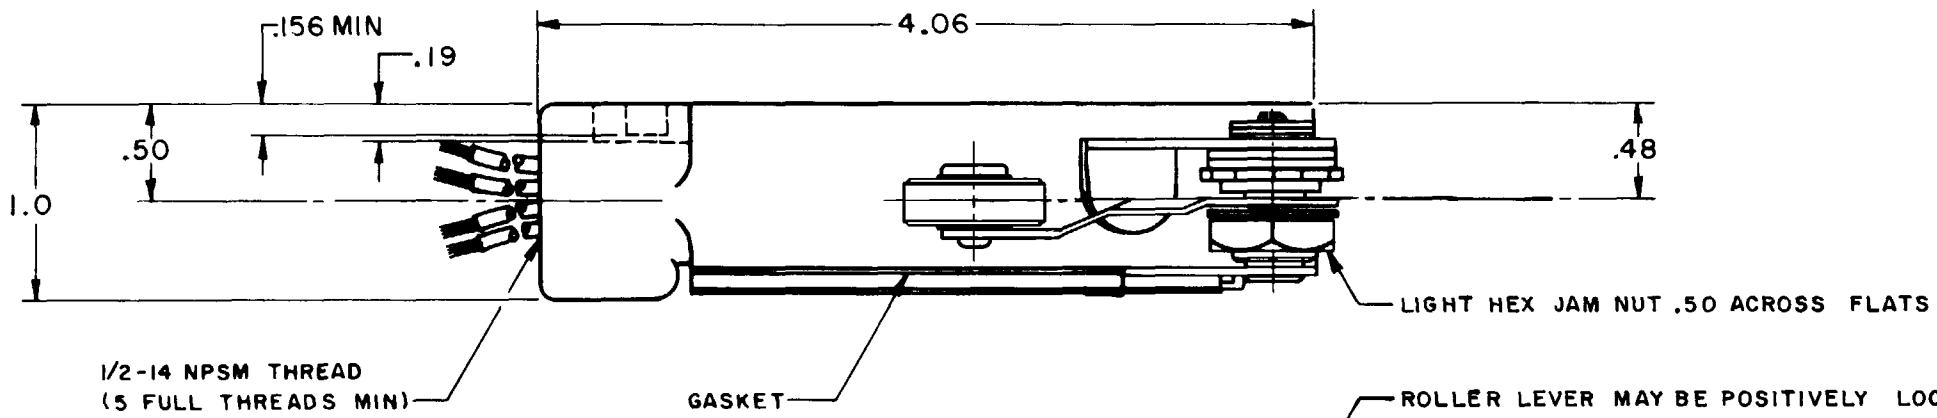

MICRO SWITCH
A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
2LN1-5-RH

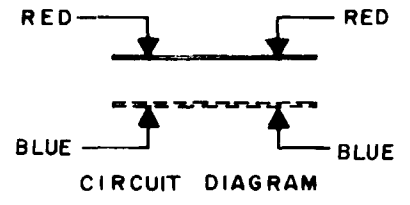

NOTE—
▲ DOWEL HOLES WILL ACCEPT .187 MAX DIA DOWEL PINS
ON 3.250 X .375 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL												
OPERATING FORCE----- 3 LB MAX		CONTACT ARRANGEMENT		DO NOT SCALE PRINT												
DIFFERENTIAL FORCE----- 1/4 LB MIN		(SEE CIRCUIT DIAGRAM)														
RELEASE FORCE----- 1/2 LB MIN		-L25-10 A-125 OR 250 VAC1/2 HP-125 VAC RJ														
PRETRAVEL----- .125 MAX																
DIFFERENTIAL TRAVEL----- .078 MAX																
OVERTRAVEL----- .344 MIN																
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: <table><tr><td>ONE PLACE</td><td>(.0)</td><td>± .030</td></tr><tr><td>TWO PLACE</td><td>(.00)</td><td>± .015</td></tr><tr><td>THREE PLACE</td><td>(.000)</td><td>± .005</td></tr><tr><td>ANGLES</td><td></td><td>±</td></tr></table>			ONE PLACE	(.0)	± .030	TWO PLACE	(.00)	± .015	THREE PLACE	(.000)	± .005	ANGLES		±
ONE PLACE	(.0)	± .030														
TWO PLACE	(.00)	± .015														
THREE PLACE	(.000)	± .005														
ANGLES		±														
		WEIGHT														