

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

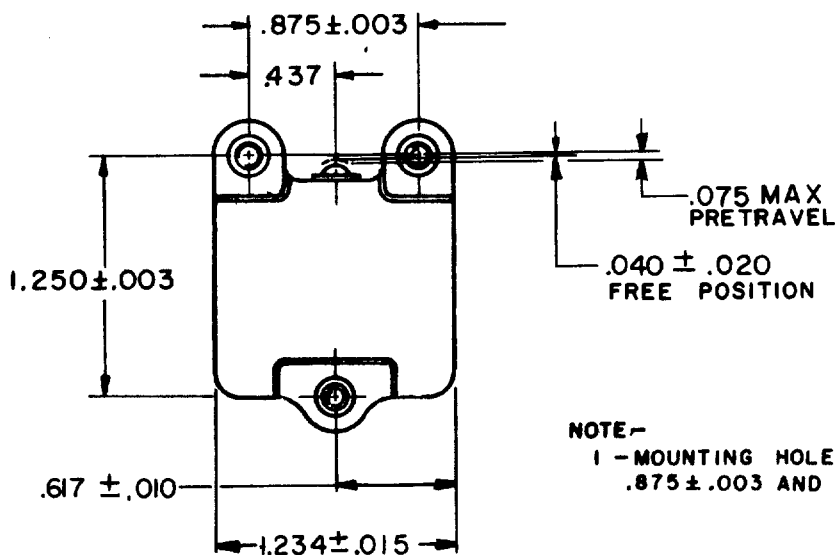
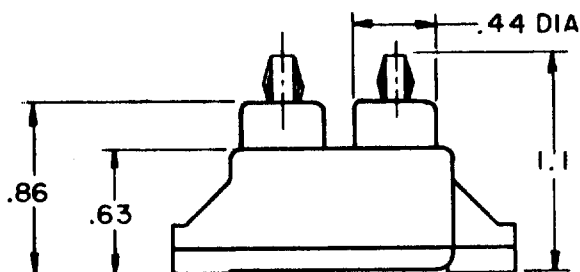
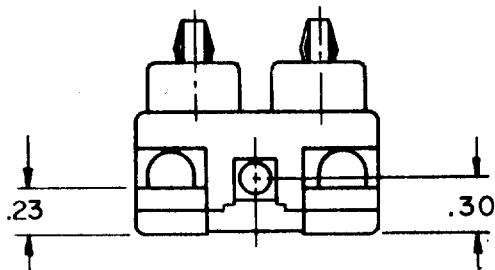
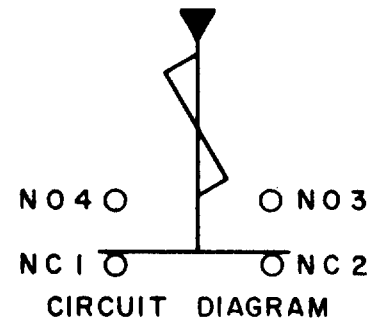
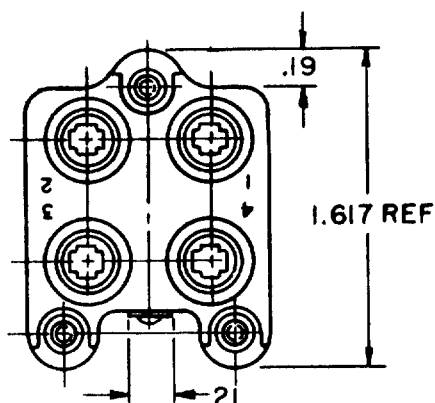
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

2MN13

S

**NOTE-**1 - MOUNTING HOLES WILL ACCEPT NO.4 SCREWS ON
.875 ± .003 AND 1.250 ± .003 CENTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 11 OZ MAX

RELEASE FORCE - - - - - 3 OZ MIN

DIFFERENTIAL TRAVEL - - - .005-.009

OVERTRAVEL - - - - - .017 MIN

RELEASE TRAVEL - - - - - .022 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM10 A - 120, 240, OR 480 VAC,
1/2 HP - 120 VAC; 1 HP - 240 VAC
PILOT DUTY: 600 VAC MAX**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

2MN13

M

DRAWING
NUMBER

X B

ISSUE

6

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO15200

W E 8

22 JUNE 65

B CO23123

ORD

21 MAR 68

C CO25152

GFS

11 FEB 69

DEO

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

CHECK

LSD

22 JUN 65

FO-50378