



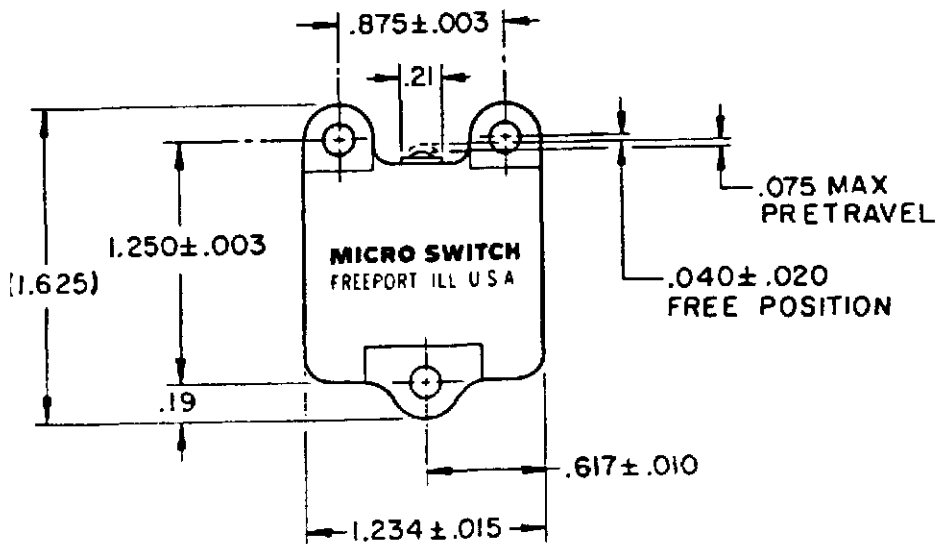


4X 8-32 UNC PAN HEAD SCREW AND
CLAMPING PRESSURE PLATE

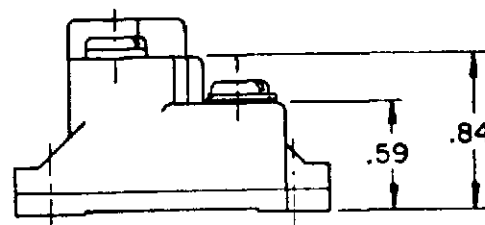

CIRCUIT DIAGRAM

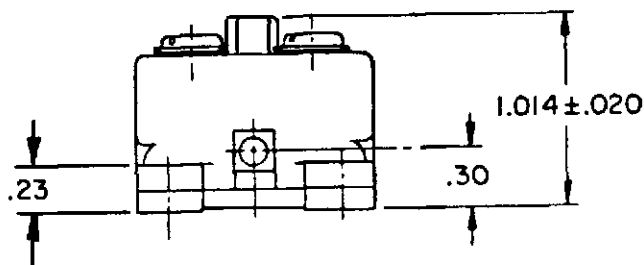


NOTE

1 - MOUNTING HOLES WILL ACCEPT NO. 4 SCREWS ON $.875 \pm .003$
AND $1.250 \pm .003$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE -----11 OZ MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE -----3 OZ MIN	L100 10A 125, <u>250</u> OR 480 VAC 1/2HP 125 VAC, 1HP <u>250</u> VAC 	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL -----.005-.009		TWO PLACE (.00)	±.015
OVERTRAVEL -----.017 MIN		THREE PLACE (.000)	±.005
RELEASE TRAVEL -----.022 MIN		ANGLES	±
		WEIGHT	

2MN8-L

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-511

CHECK

CHECK

8 MAY 95

JAF

CHECK

20 APR 95

FORMTEK

DRAWN

CATALOG LISTING

ISSUE 8

REVISIONS

A C076997

GJW

20 APR 95

B C094359

DLT

20 APR 99