

AI

MICRO SWITCHA DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPARED, ILLINOIS

FED. MFR. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**CATALOG LISTING
2PB28-T**2PB28-T**

PAGE 1 OF 1

MDRAWING
NUMBER

9

ISSUE

REPLACES

RELEASE NO. SR 5248

20 FEB 06

RJ

CHECK

16

24 MAY 56

ACE

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

16

24 MAY 56

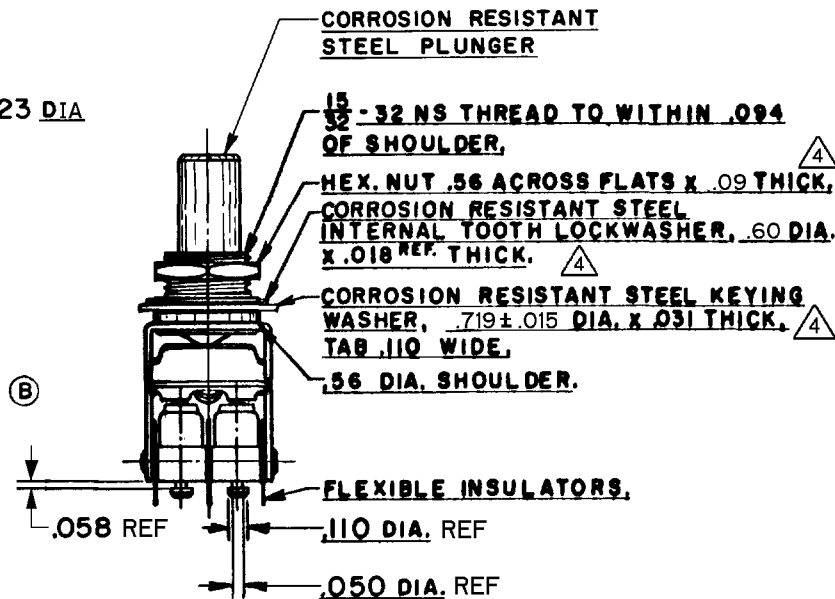
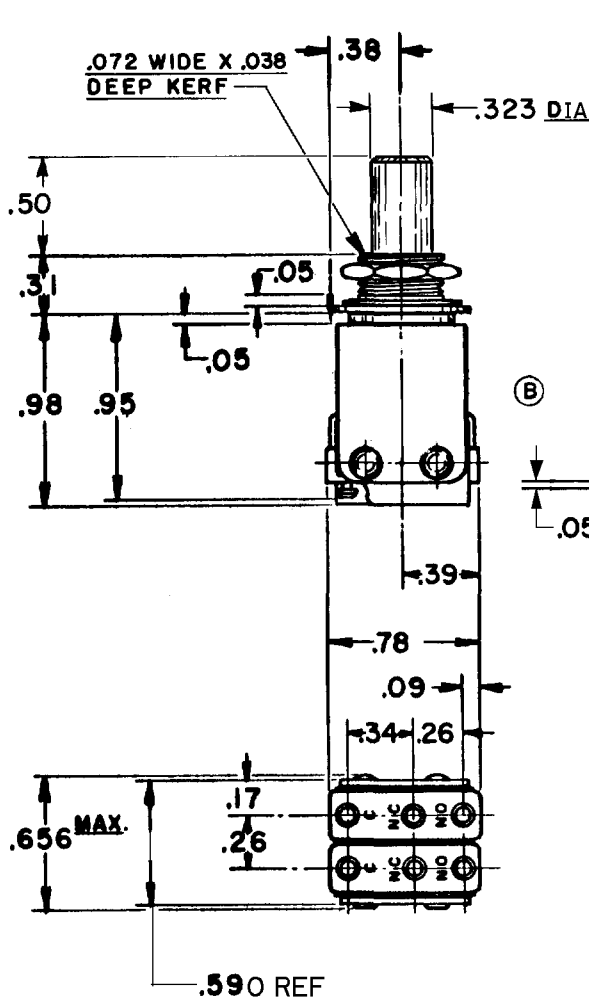
16

24 MAY 56

16

24 MAY 56

16

**NOTE**

- 1-UNIT INCLUDES "ISM" TYPE BASIC SWITCH (2) (D)
 2-TERMINALS ARE PLATED FOR SOLDERING.
 3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

(A) MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 30 OZ APPROX

PRETRAVEL — — — .040 APPROX

TOTAL TRAVEL — — — .110 APPROX.

DIFFERENTIAL TRAVEL — — — .050 MAX.

ELECTRICAL DATACONTACT ARRANGEMENT
(2) SPD.T

250 VAC — — — — — 5 AMP

30 VOLTS DC RATING

INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP
50,000 FT. — — — 2.5 AMPRESISTIVE — — — — — SEA LEVEL — — — 5 AMP
50,000 FT. — — — 5 AMP

MAXIMUM INRUSH — — — — — 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

74-28

DRAWN

K.F.M. 15 MAY 56