

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
POMEREOY, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY— PUSHBUTTON SWITCH

CATALOG LISTING
2PB32-T2

A-1

2PB32-T2

PAGE 1 OF 1

M

DRAWING NUMBER

6

ISSUE

REVISIONS

A SR 10605

M B F

26 OCT 62

B CO19800

H B W

15 JAN 65

C CO31782

D B W

16 MAR 73

D CO-93593

P P F

23 OCT 98

E CO-94273

G J W


15 APR 99

DRAWN

16 MARCH 62

M B F

FO-50378

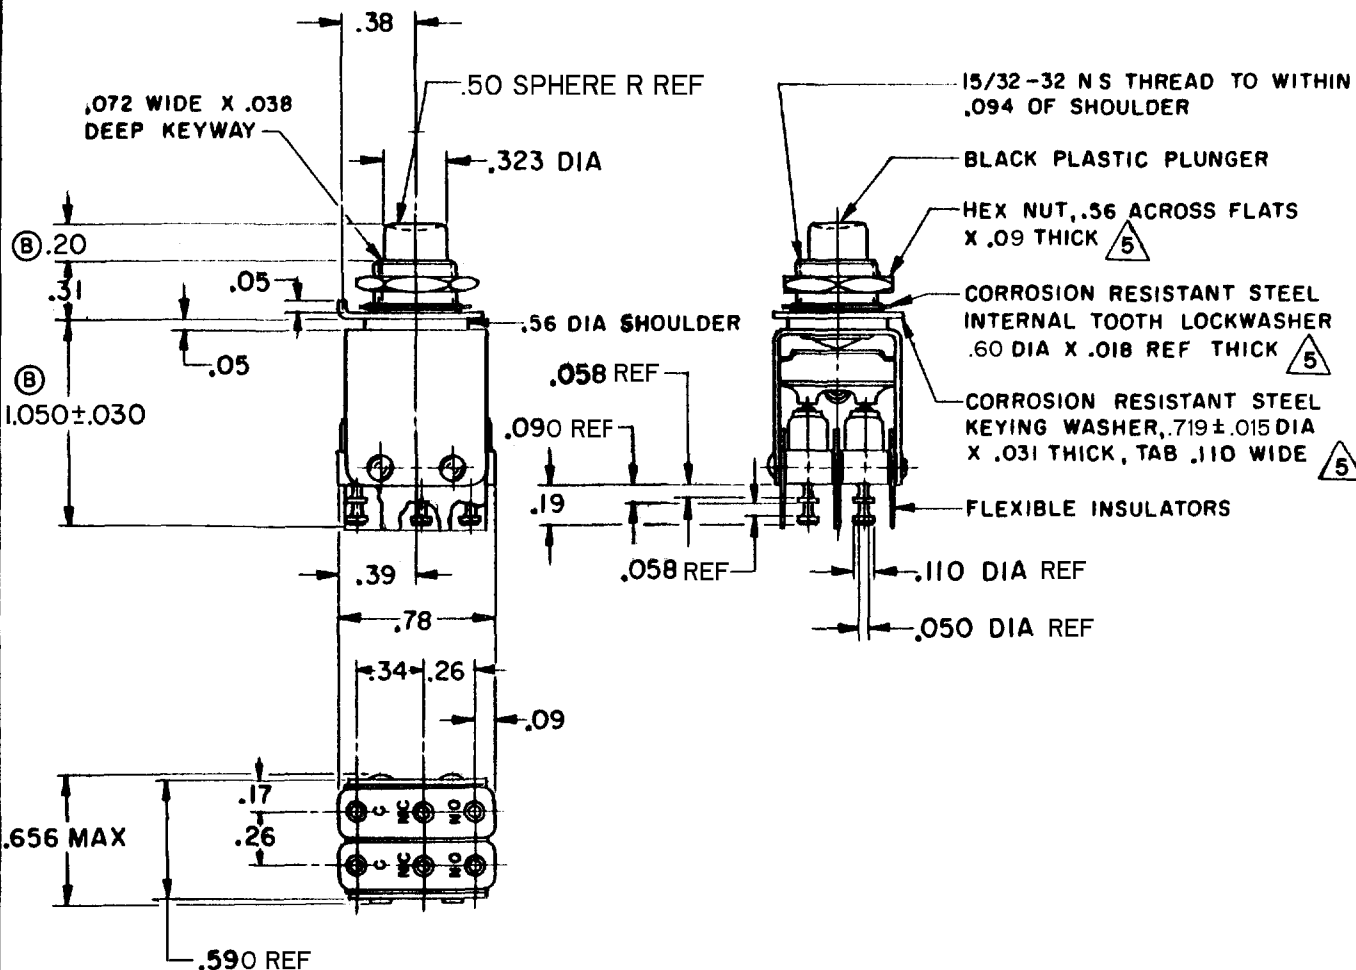

NOTES

- 1- UNIT INCLUDES "IISM" TYPE BASIC SWITCH (2)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4- BASIC SWITCHES HAVE 24K SOLID GOLD CONTACTS
- 5- MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ———30 OZ APPROX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
TOTAL TRAVEL ———100 APPROX	S P D T (2)	UNLESS OTHERWISE SPECIFIED
	30 VOLTS - DC RATING	DIMENSIONS ARE IN INCHES
	INDUCTIVE ——— SEA LEVEL ——— 1/2 AMP	TOLERANCES ARE:
	50,000 FT ——— 1/2 AMP	ONE PLACE (.0) ±.030
	RESISTIVE ——— SEA LEVEL ——— 1 AMP	TWO PLACE (.00) ±.018
	50,000 FT ——— 1 AMP	THREE PLACE (.000) ±.008
	MAXIMUM INRUSH ——— 2 AMP	ANGLES ±
		WEIGHT