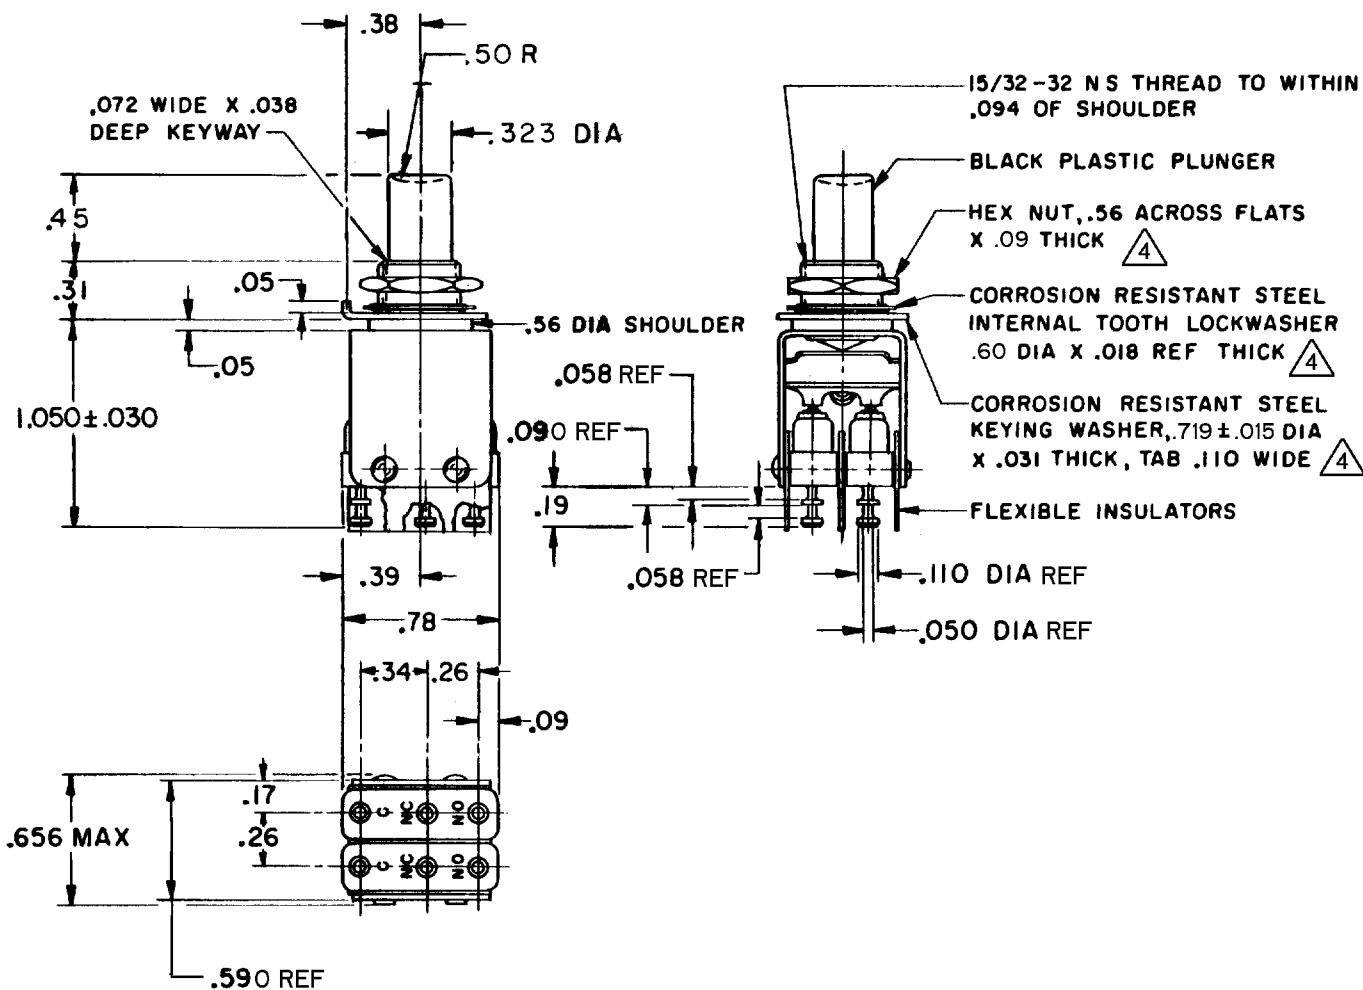


**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**

CATALOG LISTING

2PB52-T2**NOTES**

- 1- UNIT INCLUDES "IISM" TYPE BASIC SWITCH (2)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4 MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — 30 OZ APPROX

TOTAL TRAVEL — — — .100 APPROX

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T (2)

250 VOLTS — — — — — 5 AMP

30 VOLTS DC RATING

INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP

50,000 FT — — — 2.5 AMP

RESISTIVE — — — — — SEA LEVEL — — — 5 AMP

50,000 FT — — — 5 AMP

MAXIMUM INRUSH — — — — — 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT**2PB52-T2**

PAGE 1 OF 1

MDRAWING
NUMBER

ISSUE

REPLACES

RELEASE NO. PR-2727

20 FEB 06

RJ

CHECK

98

23 OCT 98

JAF

21 SEP 67

JAF

21 SEP 67

CHECK

95

3 FEB 65

LS

3 FEB 65

LS

3 FEB 65

CHECK

65

29 JAN 65

MBF

29 JAN 65

DRAWN

FO-50378