MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

ASSEMBLY - SWITCH

CATALOG LISTING
2AC19

KC-B0190

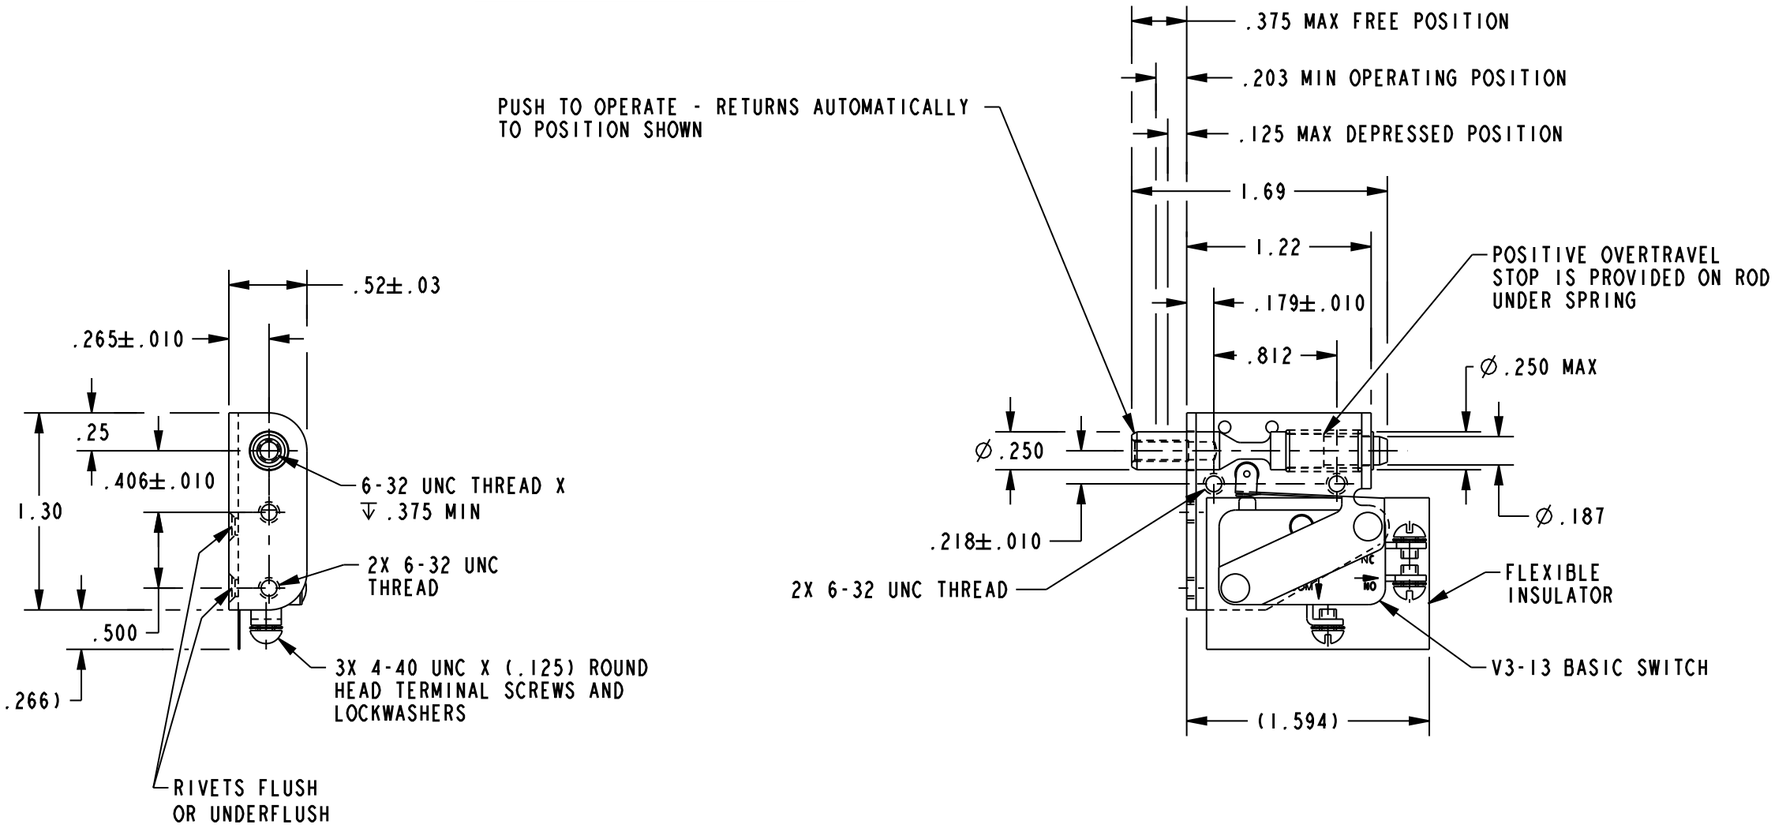

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE 1:1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CHARACTERISTICS	ELECTRICAL DATA
TOTAL TRAVEL —— .250 APPROX PUSH DIRECTION	CONTACT ARRANGEMENT S P D T
FULLY DEPRESSED FORCE ——— 4 LBS MAX	15.1A 1/2HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"

NOTES
1 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
2 - WITH ROD IN EITHER ACTUATED POSITION, BASIC SWITCH PLUNGER MUST HAVE .010 MIN OVERTRAVEL AND WITH ROD IN FREE POSITION BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 2AC19 PAGE 1 OF 1 RELEASE NO. SR-10210 REPLACES -

ISSUE 9

REVISIONS
A 0000507 CSL 11 JUN 03
B 0054964 LK 27JUL09
C 0057519 SJK 13OCT09

CHECK
CHECK 13OCT09
CHECK CMH
CHECK
DRAWN CSL 11 JUN 03

PTC/CAD 2D