

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING




2EX1

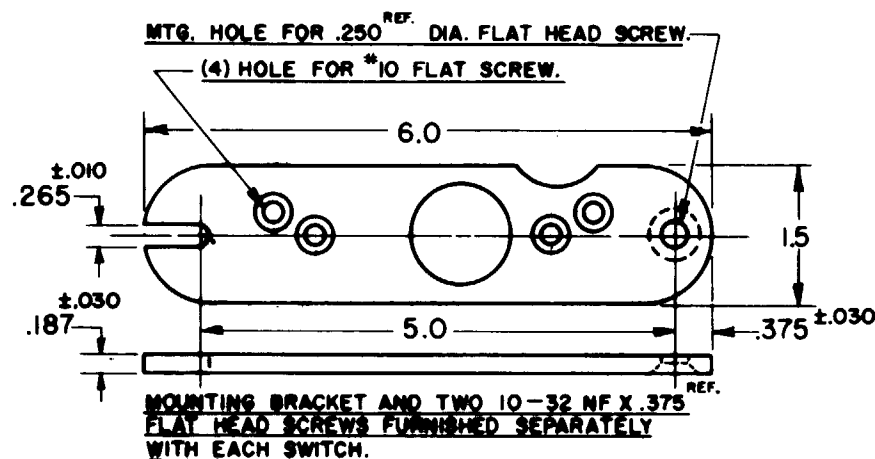

SCALE - HALF SIZE

2.4

.53 WITHOUT WIRE LEAD

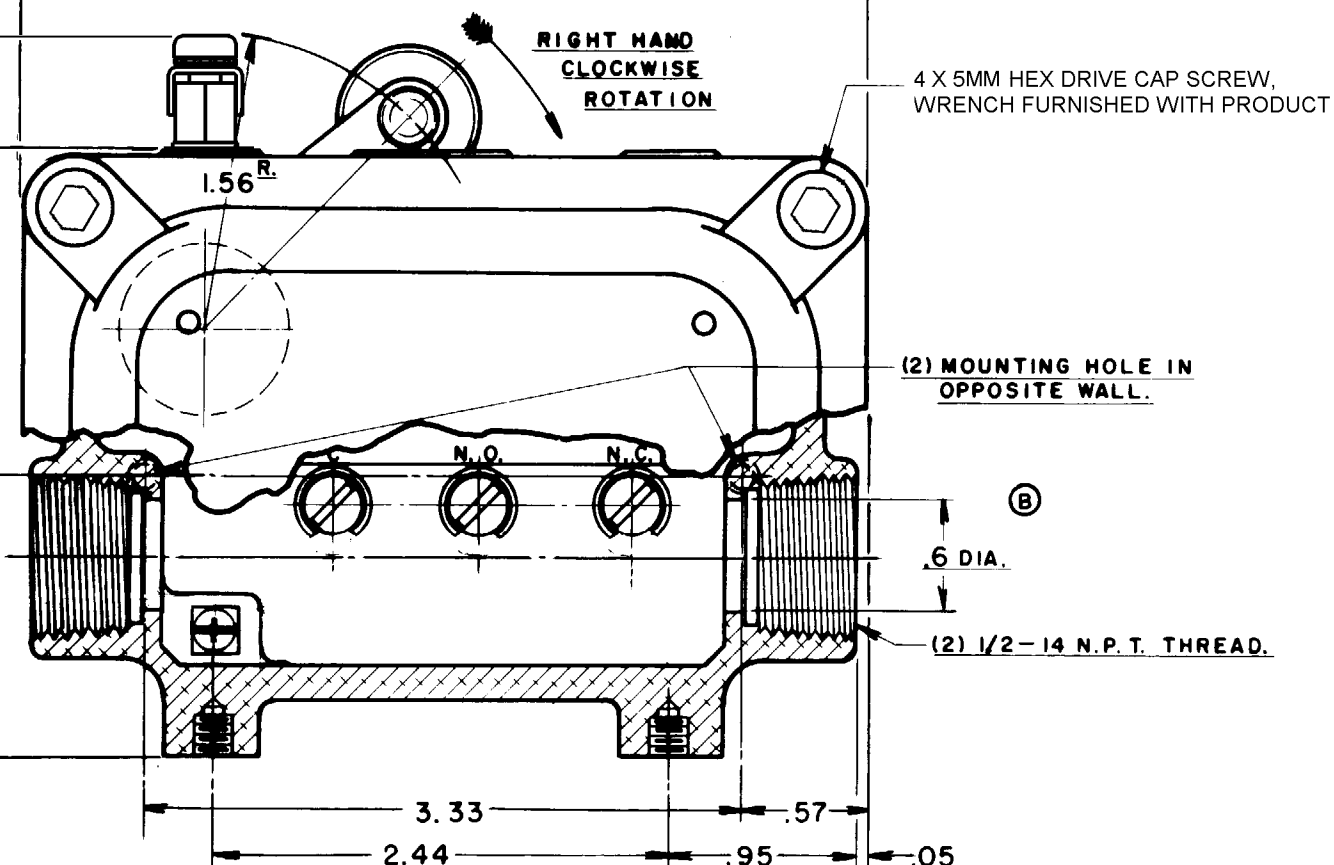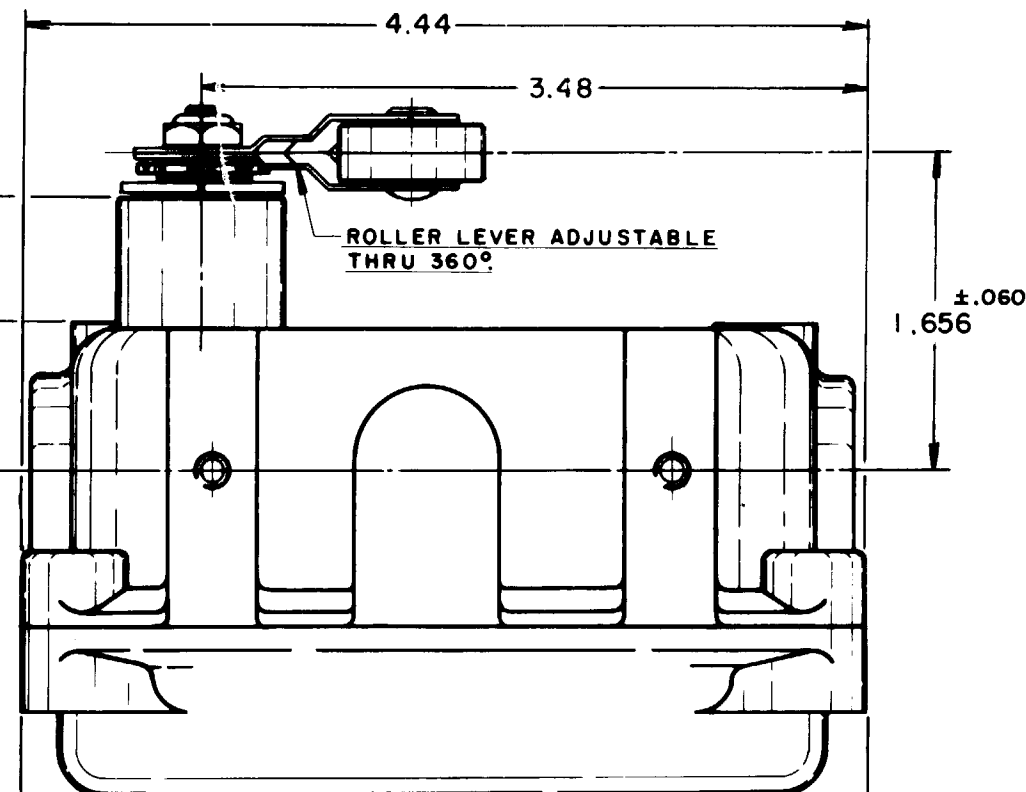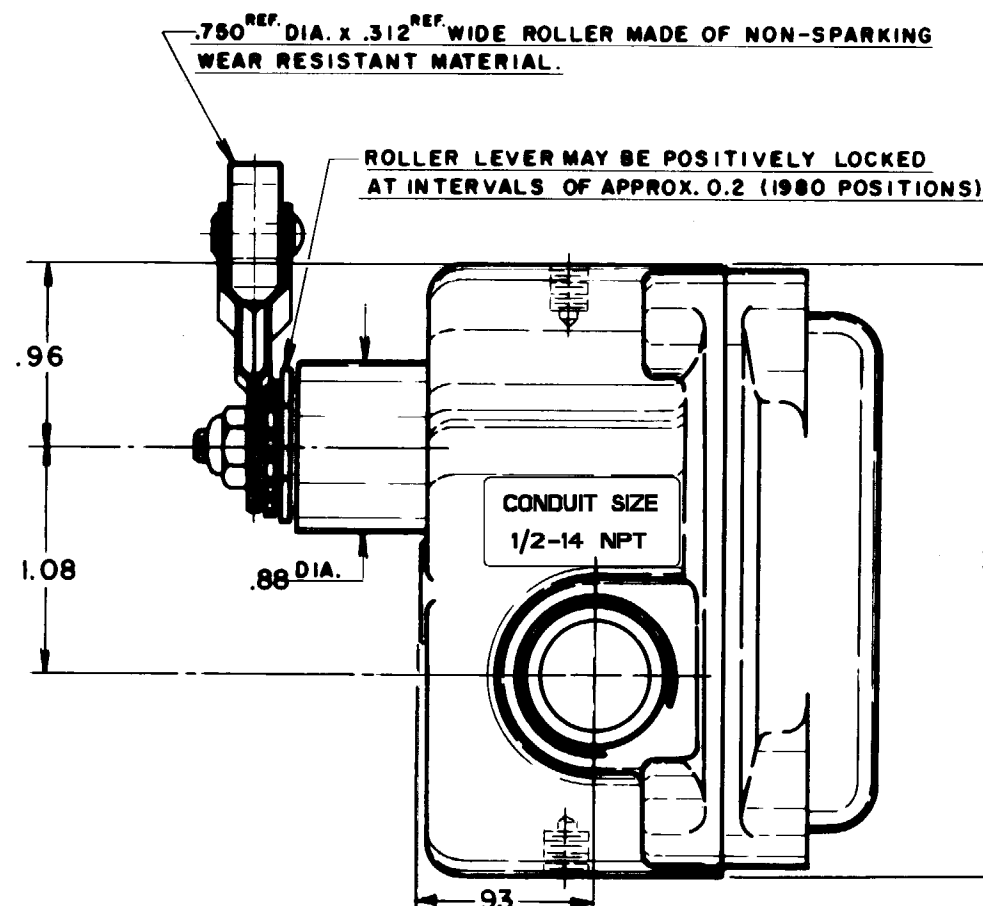

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 12-32 OZ

RELEASE FORCE - - - - - 8 OZ MIN

PRETRAVEL - - - - - (8°) .219 MAX

DIFFERENTIAL TRAVEL - - (1/2°) .012 MAX

DO NOT OVERTRAVEL MORE THAN - - - - - 25°

SWITCH - BASIC REPLACEMENT - - - - - BA-2R-P4

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

BREAK DISTANCE
.020 MIN

-L23-

20 A-125, 250 OR 480 VAC
10 A-125 VAC "L"

1 HP-125 VAC, 2 HP-250 VAC
1/2 A-125 VDC, 1/4 A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

NOTES

- (6) MOUNTING SCREW HOLES, 10-32 NF-2B THREADS X .219 REF DEEP
- 8-32 NC X .219 REF BINDER HEAD TERMINAL SCREWS AND CUPWASHERS
- EXPLOSION PROOF-UNDERWRITERS LAB INC LISTED FOR HAZARDOUS LOCATIONS NEMA7, CLASS 1, GROUPS C AND D, NEMA 9, CLASS II, GROUPS E, F AND G.
- EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: Ex d IIB + H2 T6 CATEGORY II 2 G
- SEAL RATING: NEMA 1
- EXTERNAL GROUND SCREW MAY BE ASSEMBLED TO ANY UNUSED MOUNTING SCREW HOLE
- ASSEMBLE PROVIDED SPLIT LOCKWASHER BETWEEN GROUND LUG AND HOUSING

RASTER